



广州市泳森泳池水疗设备有限公司

Guangzhou Yongsen Pool Spa Equipment Co., Ltd.

Swimming pool • Sauna • Steam • Spa



广州市泳森泳池水疗设备有限公司

Guangzhou Yongsen Pool Spa Equipment Co., Ltd.

广州市泳森泳池水疗设备有限公司

Guangzhou Yongsen Pool Spa Equipment Co., Ltd.

公司地址：广东省广州市天河区五山路246、248、250号1502-04自编 (A524)

Company ADD: (A524)1502-04, No. 246, 248 and 250 Wushan Road, Tianhe District, Guangzhou, China.

电话(Tel): +86 18502084824

网址 (Web): <http://www.yongsenpoolspa.com/>

邮箱 (E-mail): yongsenpoolspa@outlook.com



Yongsen Website



WhatsApp(Mandy)



Online Catalog

» 公司简介 Company profile

广州市泳森泳池水疗设备有限公司向世界各地提供游泳池设备、Spa和桑拿。我们为客户提供常规产品，也根据客户的要求提供定制产品。

我们的产品涵盖各种水处理系统、集成过滤系统、消毒系统、水加热系统、娱乐设施、SPA桑拿设备等。我们的核心价值观是“质量第一，服务第一”。泳森致力于成为世界上最好的游泳池设备供应商。我们建立了一支专业的销售团队来提供良好的服务和一支可靠的质量控制团队来控制质量，最重要的是，我们在新产品上投入了大量资金，我们的研发部门总是推出客户满意的创新产品。

质量至关重要，我们有竞争力的价格也有助于赢得市场。我们期待与所有客户建立长期稳定的贸易关系。凭借更好的质量和更好的服务，让我们帮助您赢得更美好的未来。

Guangzhou Yongsen Pool Spa Equipment Co.,Ltd. supplying swimming pool equipment, SPA & Sauna to different countries all over the world. We provide conventional products to our customer, we also provide customized products as per customer's requirement.

Our products cover various water treatment system, integrated filter system, disinfection system, water heating system, recreation facilities, SPA sauna equipment,etc.Our core value "Quality First, Service First". Yongsen dedicate to become a best supplier of pool equipment in the world. We established a professional sales team to provide good service& a reliable QC team to control the quality well, most important, our company invest a lot on new products, our R&D department always bring out innovative products which customers are satisfied with.

Quality is vital importance, our competitive price also help a lot to win the market. We are expecting to establish a long-term and steady trade relationship with all of our clients. With better quality and better service, let us help you win a better future.

WhatsApp/WeChat: +86 185 0208 4824

Instagram/Facebook: yongsenpoolspa

<http://www.yongsenpoolspa.com/>



产品目录

PRODUCT CONTENTS

1、过滤设备系列 Filtration equipment series	1-22
2、逆流推进器系列 Smart pool push series	23-24
3、消毒系列 Disinfectionseries	25-29
4、池面设备系列 Pool surface equipment series	30-46
5、泳池配件 Swimming pool accessories	47-52
6、按摩浴缸系列 SPA series	53-56
7、恒温系列 Heating water series	57-59
8、桑拿系列 Sunna series	60-70
9、喷泉系列 Fountain equipment series	71-74
10、户外系列 Outdoor series	75-76




壁挂式一体化过滤器 Wall mounted integrated filter



Mosel:YS-35

一体化过滤器采用优质的亚克力原料做外壳，其耐酸性能好，易清洗，不易褪色；一体化过滤器安装无需机房，安装简单，操作方便，性能优异，从而减低施工成本。同时一体化过滤器符合国家泳池规范和标准。

The enclosure of wall-mounted filter is made of high quality Acrylic, so the filter is anti-acid anti-fading, and easy to clean. Integrated filter installation without room, simple installation, convenient operation, excellent performance, thereby reducing the construction cost. The filter is made according to Countries codes and standards.

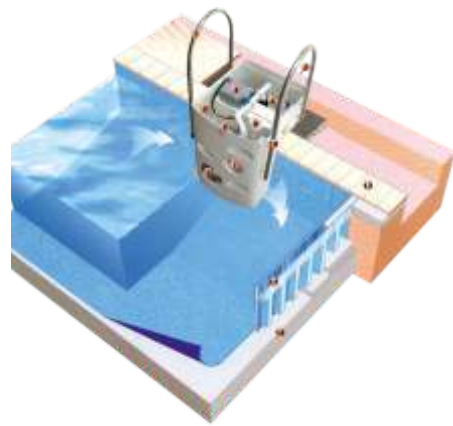

- 1、不锈钢扶手 Stainless-steel hand rail
- 2、电缆管 Cable pipe
- 3、变压器及接线盒 Transformer and terminal box
- 4、排污管 Sewage pipe
- 5、带过滤筒 Cartridge filter
- 6、消毒器 Sterilizer
- 7、激流喷嘴 Injector nozzle
- 8、泳池灯 Swimming pool lamp
- 9、进水口 Water inlet
- 10、出水口 Water outlet
- 11、现场活动围板 Hoarding
- 12、混凝土 Concrete
- 13、池边砖 Poolside tile

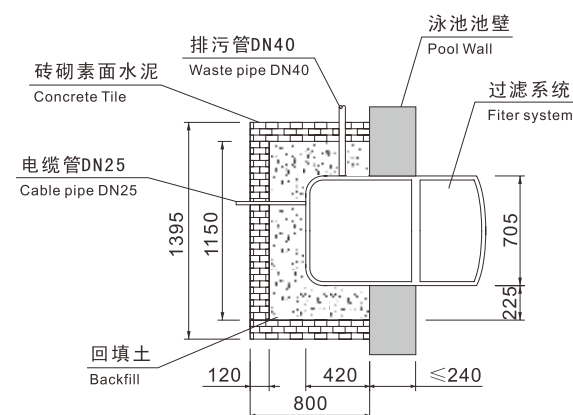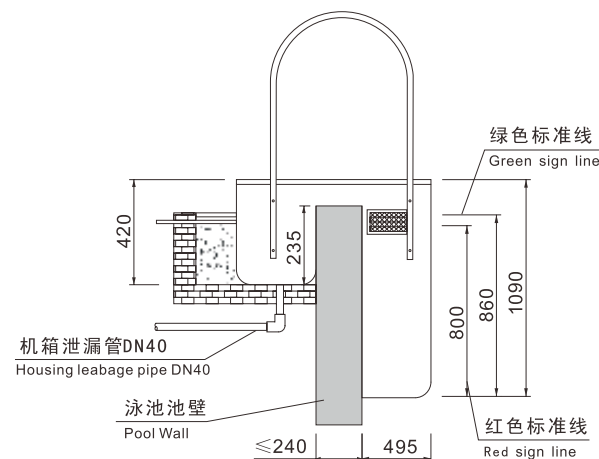

技术参数 TECHNICAL CHARACTERISTICS

Dimensions 尺寸	1150□710□1090mm
Flow rate 流量	35m ³ /h
Voltage 电压	220V / 50Hz or 60Hz
Precision of filtration bag 过滤精度	≤5u
Operating noise 运行噪音	≤50Db
Material 材料	Acrylic
Installation 安装方式	Wall mounting

设备配置 EQUIPMENT

Filtration Pump 过滤泵	1x2HP
Filtration basket with bag 过滤袋	1pc
Chlorine feeder 投药器	1pc
Light 灯	1xLED 10W/12V
Time controller 定时控制器	1pc
Swim jet 喷嘴	2pcs
Handle rail (S.S.) 扶手	2pcs
Ozone(optional) 臭氧	1pc 选配(options)

设备系统 SYSTEM


Filtration system 过滤系统	2pc
Disinfection system 消毒系统	1pc 选配(options)
Time control system 定时系统	1pc
Circle system 循环系统	1pc
Lighting system 照明系统	1pc

壁挂式一体化过滤器 Wall mounted integrated filter

Mosel:YS-10 (儿童池专用 Children Swimming Pool)

一体化过滤器采用优质的亚克力原料做外壳，其耐酸性能好，易清洗，不易褪色；一体化过滤器安装无需机房，安装简单，操作方便，性能优异，从而减低施工成本。同时一体化过滤器符合国家泳池规范和标准。

The enclosure of wall-mounted filter is made of high quality Acrylic, so the filter is anti-acid anti-fading, and easy to clean. Integrated filter installation without room, simple installation, convenient operation, excellent performance, thereby reducing the construction cost. The filter is made according to Countries codes and standards.

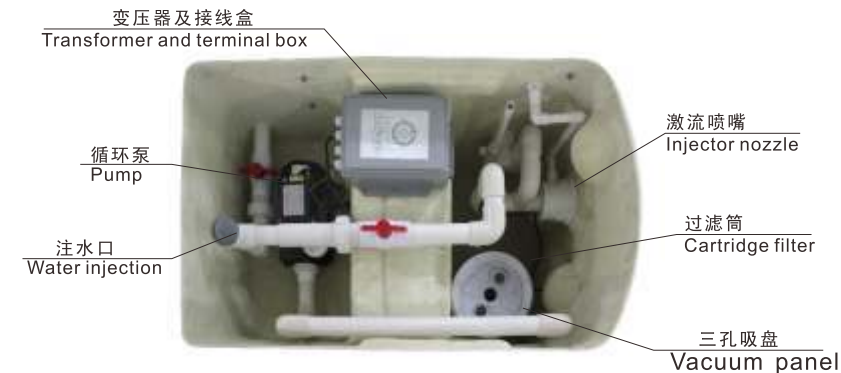

技术参数 TECHNICAL CHARACTERISTICS



Dimensions 尺寸	1110x 670x 780mm
Flow rate 流量	10m ³ /h
Voltage 电压	220V / 50Hz or 60Hz
Precision of filtration bag 过滤精度	≤5u
Operating noise 运行噪音	≤50Db
Material 材料	Acrylic
Installation 安装方式	Wall mounting

设备配置 EQUIPMENT

Filtration Pump 过滤泵	1x1HP
Filtration basket with bag 过滤袋	1pc
Chlorine feeder 投药器	1pc
Light 灯	1xLED 10W/12V
Time controller 定时控制器	1pc
Swim jet 喷嘴	2pcs
Handle rail (S.S.) 扶手	2pcs
Ozone(optional) 臭氧	1pc 选配(options)

设备系统 SYSTEM

Filtration system 过滤系统	1pc
Disinfection system 消毒系统	1pc
Time control system 定时系统	1pc
Circle system 循环系统	1pc
Lighting system 照明系统	1pc

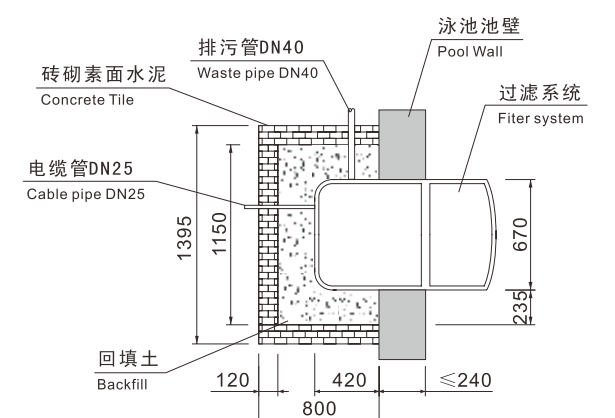
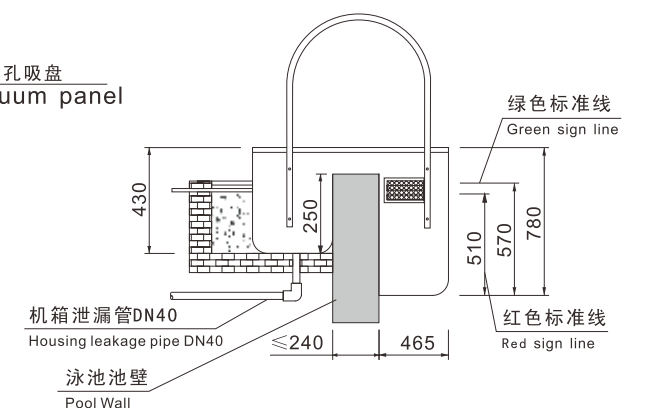


壁挂式一体化过滤器 Wall mounted integrated filter

Mosel:YS-25

一体化过滤器采用优质的聚氯乙烯原料做外壳，先进的工艺一次成型，美观耐用；一体化过滤器改变了传统的安装模式，无需机房，安装简单，操作方便，性能优异，从而减低施工成本。同时一体化过滤器符合国家泳池规范和标准。

The enclosure of wall-mounted filter is made of high quality Polyethylene. The wall-mounted filter is change to traditional sand filter. Now the filter installation without room, simple installation, convenient operation, excellent performance, thereby reducing the construction cost. The filter is made according to Countries codes and standards.

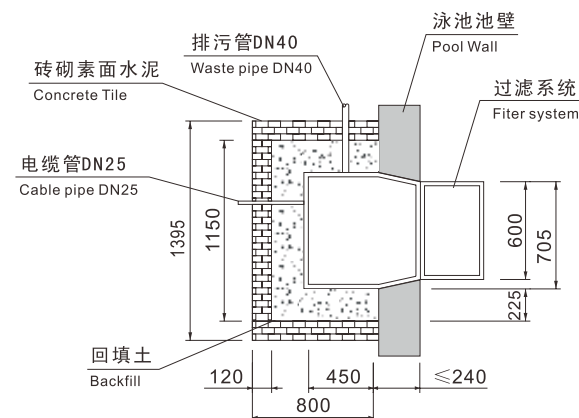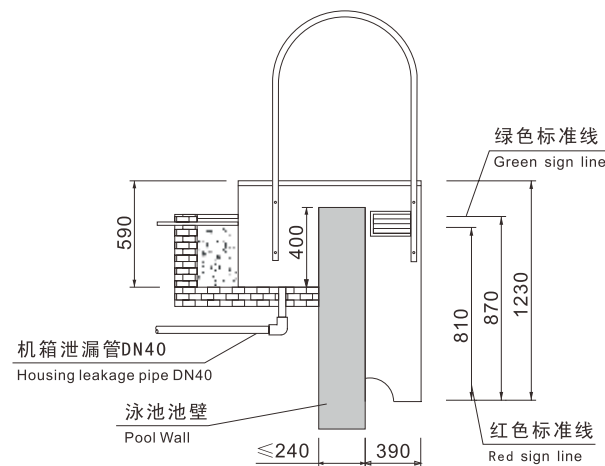

技术参数 TECHNICAL CHARACTERISTICS

Dimensions 尺寸	1095x 705x 1230mm
Flow rate 流量	25m ³ /h
Voltage 电压	220V / 50Hz or 60Hz
Precision of filtration bag 过滤精度	≤5u
Operating noise 运行噪音	≤50Db
Material 材料	Polyethylene
Installation 安装方式	Wall mounting

设备配置 EQUIPMENT

Filtration Pump 过滤泵	1x2HP
Filtration basket with bag 过滤袋	1pc
Chlorine feeder 投药器	1pc
Light 灯	1xLED 10W/12V
Time controller 定时控制器	1pc
Swim jet 喷嘴	2pcs
Handle rail (S.S.) 扶手	2pcs
Ozone(optional) 臭氧	1pc 选配(options)

设备系统 SYSTEM



Filtration system 过滤系统	1pc
Disinfection system 消毒系统	1pc
Time control system 定时系统	1pc
Circle system 循环系统	1pc
Lighting system 照明系统	1pc

壁挂式一体化过滤器 Wall mounted integrated filter

Mosel:YS-10A (儿童池专用 Children Swimming Pool)

一体化过滤器采用优质的聚氯乙烯原料做外壳，先进的工艺一次成型，美观耐用；一体化过滤器改变了传统的安装模式，无需机房，安装简单，操作方便，性能优异，从而减低施工成本。同时一体化过滤器符合国家泳池规范和标准。

The enclosure of wall-mounted filter is made of high quality Polyethylene. The wall-mounted filter is change to traditional sand filter. Now the filter installation without room, simple installation, convenient operation, excellent performance, thereby reducing the construction cost. The filter is made according to Countries codes and standards.

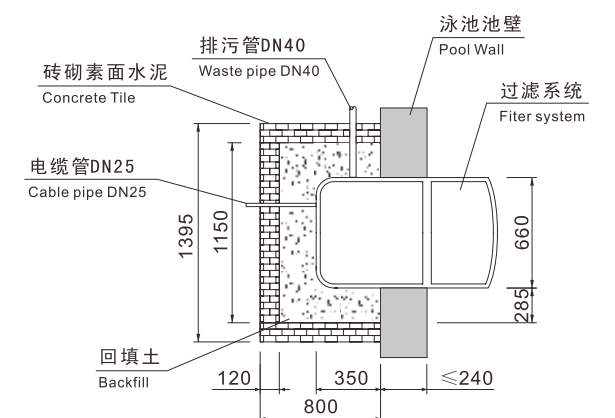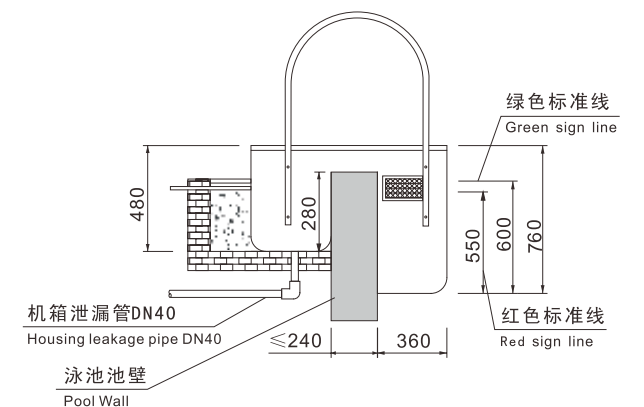

技术参数 TECHNICAL CHARACTERISTICS

Dimensions 尺寸	950x580x800mm
Flow rate 流量	15m ³ /h
Voltage 电压	220V / 50Hz or 60Hz
Precision of filtration bag 过滤精度	≤5u
Operating noise 运行噪音	≤50Db
Material 材料	Acrylic
Installation 安装方式	Wall mounting

设备配置 EQUIPMENT

Filtration Pump 过滤泵	1x1.5HP
Filtration basket with bag 过滤袋	1pc
Chlorine feeder 投药器	1pc
Light 灯	1x LED or 100W
Time controller 定时控制器	1pc
Swim jet 喷嘴	2pcs
Handle rail (S.S.) 扶手	2pcs
Ozone(optional) 臭氧	1pc 选配(options)

设备系统 SYSTEM

Filtration system 过滤系统	1pc
Disinfection system 消毒系统	1pc
Time control system 定时系统	1pc
Circle system 循环系统	1pc
Lighting system 照明系统	1pc

壁挂式一体化过滤器 Wall mounted integrated filter

设备为整体构造，集过滤、投药、水下照明、水疗按摩、池底吸污、扶梯等功能于一体的智能型循环过滤系统，无需铺设循环管道。壳体采用优质的聚氯乙烯原料或亚克力材料，先进的工艺一次成型。

The equipment is an integral structure, which integrates the functions of filtration, dosing, underwater lighting, spa massage, sewage suction at the bottom of the pool, escalator and so on. The shell is made of high quality polyvinyl chloride or acrylic material, which is shaped by advanced technology.



YS-01 (儿童池专用) (Special for children's pool) YS-02 (单过滤桶) Single filtering barrel YS-03 (双过滤桶) (Double filtering barrel) YS-04 (单过滤桶) Single filtering barrel



型号 model	尺寸 Size (mm)	功率 Power (HP)	流量 Design Flow (m³/h)	过滤介质 Filter medium	过滤精度 Filtration precision (um)	运行噪音 Running noise (Db)	电源 power supply	外壳材质 Shell material	颜色 Color	水下灯 LED Underwater light	投药器 delivery device (Optional)	臭氧消毒 Drug delivery device	外控器 External control device
YS-01	1150*680*780	1.0	10	Filter bag	5-15	≤50	220V 50Hz	亚克力 Acrylic	七彩 Seven Colours	12W/12V	彩虹300 Rainbow 300	选配 Optional	自带 Own
YS-02	1150*690*1000	2.0	25	Filter bag	5-15	≤50	220V 50Hz	亚克力 Acrylic	七彩 Seven Colours	12W/12V	彩虹300 Rainbow 300	选配 Optional	自带 Own
YS-03	1175*700*1100	3.0	35	Filter bag	5-15	≤50	220V 50Hz	亚克力 Acrylic	七彩 Seven Colours	12W/12V	彩虹300 Rainbow 300	选配 Optional	自带 Own
YS-04	1150*690*1000	1.5	15	Filter bag	5-15	≤50	220V 50Hz	亚克力 Acrylic	七彩 Seven Colours	12W/12V	彩虹300 Rainbow 300	选配 Optional	自带 Own

地埋式一体化过滤器 Buried integrated filter

壳体采用进口玻璃纤维成型。这种壳体坚固、耐腐、防紫外线、防化学侵蚀、防水气、耐抗力、高韧性，适合室外各种气候条件，可耐低温（-40℃--75℃），适合室外安装使用。箱体内部表面光滑，底部设有地漏和水泵平台，排水及时和设计了高出底部的水泵平台，可防止水泵被淹。双段式顶盖设计，可全开（安装和维护）、也可半开（操作和运行）。采用液压杆支撑顶盖，可轻松打开顶盖，安全支撑起顶盖，便于操作、维护，托盘式设计的箱体底部便于运输。

The shell is made of imported glass fiber. This shell is strong, corrosion, uv, chemical attack, waterproof, corrosion resistance, high toughness, suitable for all kinds of outdoor climatic conditions, resistant to low temperature (75 °C to 40 °C -), suitable for outdoor installation. The inner surface of the box is smooth, and the bottom is equipped with floor drain and pump platform. The drainage is timely and the pump platform higher than the bottom is designed to prevent the pump from being flooded. Double section roof design, can be fully open (installation and maintenance), can also be half open (operation and operation). The top cover can be easily opened by using the hydraulic bar to support the top cover, which is easy to operate and maintain. The bottom of the pallet design is easy to transport.



产品型号 Product model	主要配置 Main configuration				控制方式 Control mode	接口尺寸 (mm) Size of interface	过滤面积 (m²) Filter area	产品尺寸 (mm) Product size
	过滤器 Filter	水泵功率 Pump power	设计流量 Design flow	消毒方式 Disinfection way				
YMC-01	500mm	1	10	自动投药器 Automatic dosing device	手动阀 Manual	50	0.2	1050x850x800
YMC-02	500mm	1	10		手动阀 Manual	50	0.2	1300x1240x960
YMC-03	600mm	1.2	15		手动阀 Manual	50	0.3	1300x1240x960
YMC-04	500mm	1	10		全自动控制 Fully automatic	50	0.2	1300x1240x960
YMC-05	600mm	1.2	15		全自动控制 Fully automatic	50	0.3	1300x1240x960
YMC-06	SF50纸芯过滤器 SF50 Paper core filter	2	26		手动阀 Manual	50	0.64	1300x1240x960
YMC-07	SF75纸芯过滤器*2 SF75 Paper core filter*2	3	35		手动阀 Manual	50	0.79	1580x1480x1200
YMC-08	700mm	1.5	18		手动阀 Manual	50	0.37	1580x1480x1200
YMC-09	800mm	2	25		手动阀 Manual	63	0.5	1580x1480x1200
YMC-10	900mm	2.5	30		手动阀 Manual	63	0.64	1580x1480x1200
YMC-11	700mm	3	18		全自动控制 Fully automatic	50	0.79	1580x1480x1200
YMC-12	800mm	1.5	25		全自动控制 Fully automatic	63	0.37	1580x1480x1200
YMC-13	900mm	2	30		全自动控制 Fully automatic	63	0.5	1580x1480x1200
YMC-14	1000mm	3	35		手动阀 Manual	63	0.64	1750x1650x1450
YMC-15	1000mm	3	35		全自动控制 Fully automatic	63	0.79	1750x1650x1450

顶出过滤沙缸 TOP MOUNT SAND FILTERS

缸体采用环保、优质的玻璃纤维材料合成，坚固耐用，不易磨损，操作简便，提供了经济、高性能的配置。
要整个工作过程中采用多功能阀（六位）控制来实现不同的功能：

正常反冲洗（排出过滤器内积藏的污物）

反冲洗后，排出水管内的剩余的污物，不经过过滤排水，不经过滤循环、关闭。

Top mount sand vertical filters are built to be tougher, longer lasting and better performing. Constructed of polyester resin and non-corrosive extra-thick SUS. all internal components and connections are injection molded PVC. UV-resistance allows working under sunshine. Easy-to-use six-position valve makes you select any of the valve/filter operation in a proper way.

FILTER(Normal filtration and vacuuming)

BACKWASH(Clean filter by reversing the flow)


RINSE(Used after backwash to flush dirt from valve)

WASTE(By-passes filter, used for vacuuming to waste or lowering water level)

RECIRCULATE(By-passes filter for circulating water to pool)

CLOSED

Functions:6-Way Multiport Valve 六功能阀门分解

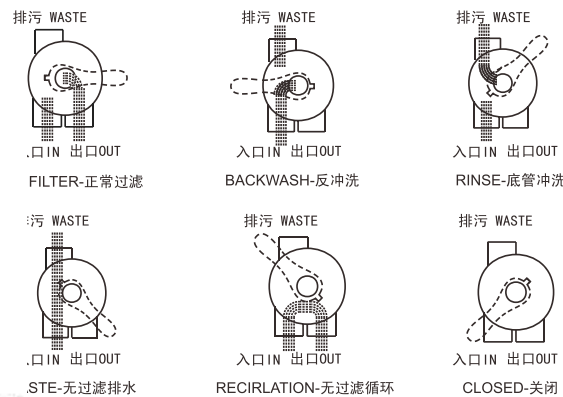

工作压力 Working pressure (kPa): 350

Ø (mm)	400	450	525	600	650	700	750	800	900	1050	1200
H1 (mm)	425	485	610	620	695	715	765	815	900	1065	1200
H2 (mm)	539	599	724	744	809	829	903	953	1038	1203	1338
H3 (mm)	475	535	660	680	745	765	829	879	964	1129	1264
H4 (mm)	475	535	660	680	745	765	829	879	964	1129	1264
H5 (mm)	680	740	865	885	950	970	1080	1130	1215	1380	1515


型号 Model	进出水口 口径 (inches) Pipe size	过滤面积 (m²) Filter Area	流量 (m³/h) Design Flow	砂量 (kg) Sand Weight	包装尺寸 (mm) Package	净重 (kg) NW	重量 (kg) GW
YSG-400	1.5	0.13	8.00	35	450*450*490	8.2	10.7
YSG-450	1.5	0.16	10.0	50	470*470*560	9.5	12.0
YSG-525	1.5	0.19	12.0	65	550*550*560	13.5	16.5
YSG-600	1.5	0.22	14.0	115	620*620*680	16.2	21.5
YSG-650	1.5	0.35	17.0	145	680*680*740	18.2	23.7
YSG-700	1.5	0.40	19.0	180	720*720*750	20.6	25.4
YSG-750	2	0.50	21.0	225	780*780*830	22.6	28.7
YSG-800	2	0.64	24.0	275	820*820*860	27.3	33.5
YSG-900	2	0.88	30.0	390	920*920*1050	32.0	38.0
YSG-1050	2	0.88	38.0	615	1060*1060*1040	52.0	60.0
YSG-1200	2	1.13	42.0	920	1220*1220*1270	63.0	71.0

注：特殊型号，可加工定做。(Note: special model, can be customized processing)

侧出过滤砂缸 SIDE MOUNT SAND FILTERS

缸体采用环保、优质的玻璃纤维材料合成，坚固耐用、不易变形、不易破裂。设计独特的布水器，使水流均匀、稳定。易安装、维护、保养方便。

Side mount sand filters are built to be tougher, longer lasting and better performing. Constructed of polyester resin and non-corrosive SUS. all internal components and connections are injection molded PVC. They allow working under sunshine. Easy-to-use six-position valve makes you select any of the valve/filter operation in a proper way.

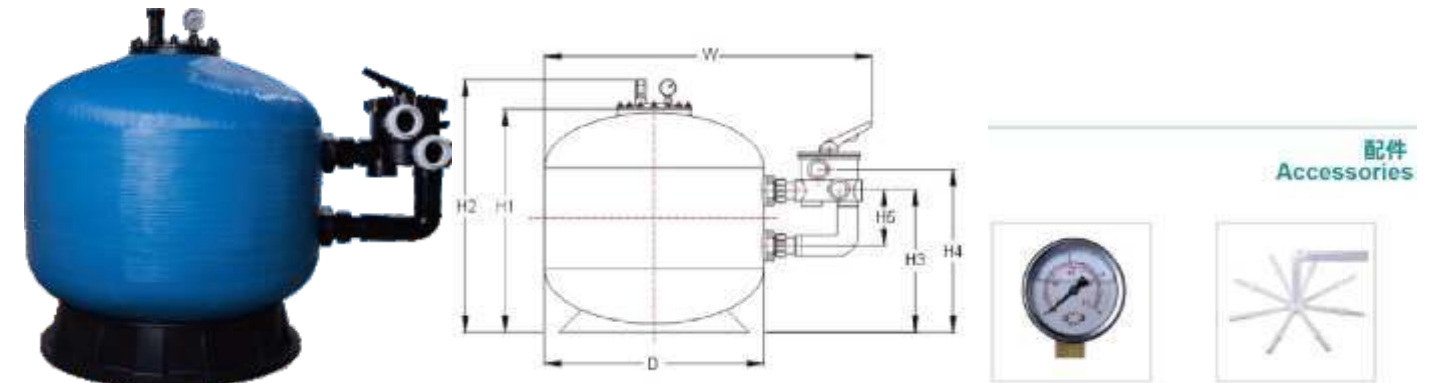

D (mm)	525	600	650	700	750	800	900	1050	1200
H1 (mm)	610	620	695	715	765	815	900	1065	1200
H2 (mm)	720	730	805	825	875	925	1010	1175	1310
H3 (mm)	410	430	450	470	540	550	620	700	780
H4 (mm)	475	495	515	535	615	625	695	775	855
H5 (mm)	150	150	150	150	200	200	200	200	200
W (mm)	885	960	1010	1060	1140	1190	1290	1440	1590

型号 Model	进出水口 口径 (inches) Pipe size	过滤面积 (m²) Filter Area	流量 (m³/h) Design Flow	砂量 (kg) Sand Weight	包装尺寸 (mm) Package	净重 (kg) NW	重量 (kg) GW
YSG-A525	1.5	0.19	12.0	65	550*550*650	15.3	18.3
YSG-A600	1.5	0.22	14.0	115	620*620*680	17.2	22.5
YSG-A650	1.5	0.32	17.0	145	680*680*740	20.0	24.0
YSG-A700	1.5	0.35	19.0	180	720*720*750	23.0	27.8
YSG-A750	2	0.40	21.0	225	780*780*830	26.1	32.0
YSG-A800	2	0.50	24.0	275	820*820*860	30.0	36.2
YSG-A900	2	0.64	30.0	390	920*920*1050	36.0	41.5
YSG-A1050	2	0.88	38.0	615	1060*1060*1040	57.0	65.3
YSG-A1200	2	1.13	42.0	920	1220*1220*1270	69.5	77.0

注：特殊型号，可加工定做。(Note: special model, can be customized processing)


大型侧出石英砂过滤器 COMMERCIAL FLANGE SAND FILTERS

缸体采用环保、优质的玻璃纤维材料合成，坚固耐用、不易磨损、不易破裂。球形缸体，缸壁厚度均匀，能均匀承受水压。可选择检修口设计，易于更换缸体的滤料。应用于大型泳池、比赛泳池、公共游泳池、水上乐园等。

Superior engineering and a company-wide commitment to customer satisfaction have produced a series of vertical filters that are built to be tougher .longer lasting and better performing than any other competing vertical commercial hi rate sand filter.Constructed of SUS and non-corrosive, all internal components and connections are injection molded SUS 1UV-resistance surface allows working under sunshine.

可选配件：透视镜、检修口、收集板、排气阀


Option: Sight Glass、Manhole、Nozzle plate、Air relief v

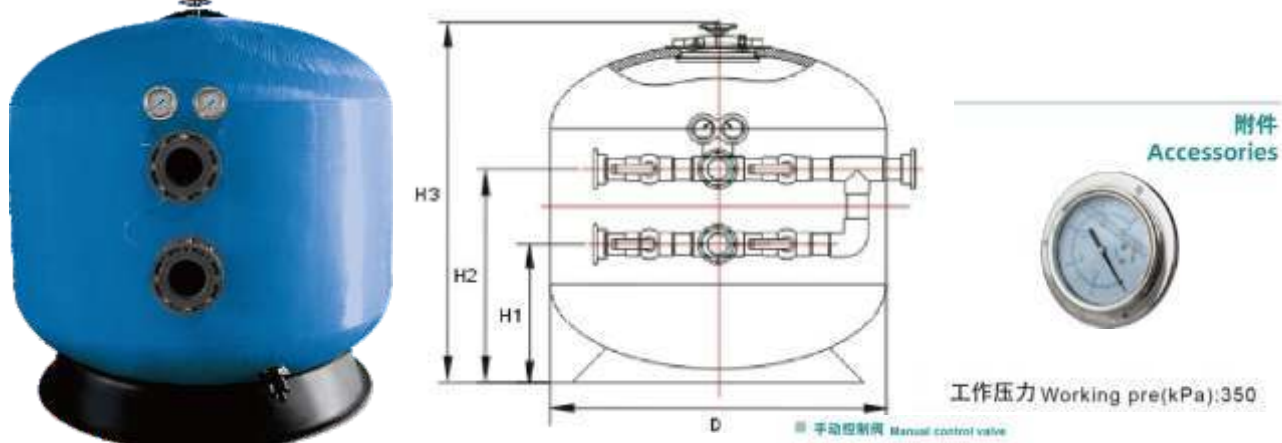


D (mm)	1400	1600	1800	2000	2350	2500
H1 (mm)	650	650	750	890	930	1030
H2 (mm)	950	950	1100	1290	1480	1530
H3 (mm)	1480	1680	1890	2120	1530	2740

型号 Model	进出水口径 (inches) Pipe size	过滤面积 (m²) Filter Area	流量 (m³/h) Design Flow	砂量 (kg) Sand Weight	包装尺寸 (mm) Package	净重 (kg) NW	重量 (kg) GW
YSG-B1400	3.0	1.25	56	1460	1450*1450*1580	8.2	10.7
YSG-B1600	3.0	2.01	100	2180	1650*1650*1780	9.5	12.0
YSG-B1800	4.0	2.54	125	3100	1950*1950*2000	13.5	16.5
YSG-B2000	6.0	3.14	153	4250	2150*2400*2250	16.2	21.5
YSG-B2350	8.0	4.12	186	6325	2400*2400*2500	18.2	23.7
YSG-B2500	8.0	4.88	238	7645	2400*2400*2500	20.6	25.4

正常过滤状态 Normal filter state

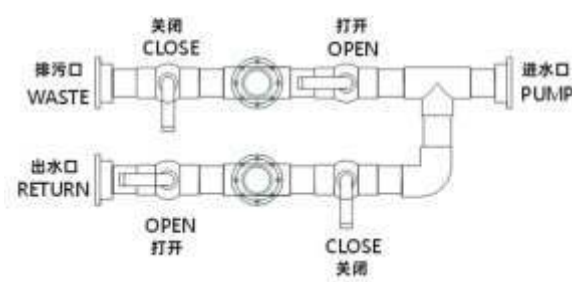

反冲洗状态 Backwashing state

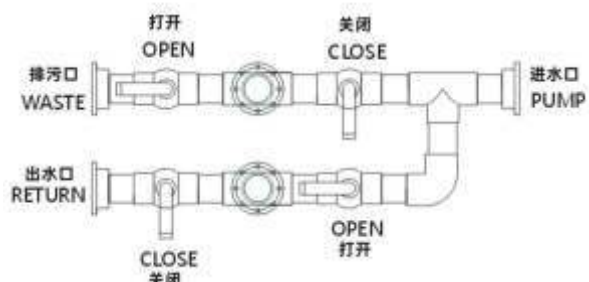

注：特殊型号，可加工定做。(Note: special model, can be customized processing)

深层过滤砂缸 DEPTH SAND FILTERS

缸体采用环保、优质的玻璃纤维合成，坚固耐用、不易磨损、不易破裂、球形缸体，缸壁厚度均匀，能均匀承受水压。设计有检修口，安装及维护方便。于大型泳池，比赛游泳池、公共游泳、水上乐园等。

Horizontal sand filters are made of polyester reinforced with SUS, they are totally anti-corrosive, and have high mechanical .chemical and thermal resistance .Higher quality water is achieved with their greater filtering capacity. Indexes of turbidity and contaminants of the filtered water are reduced due to their increased retention capacity .The time between back washes increases proportions in filtration . and lower water consumption .because the number of back washes needed is decreased and there is less erosion of the filtering material.

A horizontal filter is the ideal choice in cases where a great volume of water is to be treated .and in cases which require optimization of the available space ,as a single horizontal filter can substitute up to 3 vertical filters of the same diameter simply by increasing its length.



D(mm)	400	450	500	600	700	400	450	500	600	700
H(mm)	1300	1300	1300	1300	1300	1500	1500	1500	1500	1500
E(mm)	390	390	390	565	565	390	390	390	390	390
A(mm)	1062	1062	1062	1062	1262	1262	1262	1262	1262	1262
F(mm)	75	75	75	95	95	75	75	75	95	95
B(mm)	1115	1115	1115	1115	1115	1315	1315	1315	1315	1315
C(mm)	1174	1174	1174	1174	1174	1374	1374	1374	1374	1374

型号 Model	进出水口径 (inches) Pipe size	过滤面积 (m²) Filter Area	流量 (m³/h) Design Flow	砂量 (kg) Sand Weight	高度 (mm) Height	标准体积 (m³) Standard Volume
YSG-C13400	1.5	0.13	4.6	112	1300	0.35
YSG-C13450	1.5	0.15	5.6	143	1300	0.42
YSG-C13500	1.5	0.20	7.0	172	1300	0.50
YSG-C13600	1.5	0.28	9.8	230	1300	0.68
YSG-C13700	1.5	0.37	13.3	325	1300	0.89
YSG-C15400	1.5	0.13	3.9	141	1500	0.38
YSG-C15450	1.5	0.15	4.8	185	1500	0.48
YSG-C15500	1.5	0.20	6.0	225	1500	0.56
YSG-C15600	1.5	0.28	8.4	307	1500	0.78
YSG-C15700	1.5	0.37	13.3	430	1500	1.03

注：特殊型号，可加工定做。(Note: special model, can be customized processing)

深层过滤砂缸 DEPTH SAND FILTERS

采用环保、优质的不锈钢材料合成，具有良好的耐化学腐蚀和防晒性能，适合户内、户外安装。侧出式 法兰式设计，易操作。
可选用不同的过滤介质（沸石、石英砂、活性炭）使水更清澈、洁净、是住宅小区、集团用户水处理设备的上佳选择。

It is made of high quality SUS which is chemical and sunlight resistance , and can be installed out- of-doors .Side Mount, easily for operating.It also can be feed and mixed different filtrate medium (Such as : Zeolite, Sand and Active carbon) to make the water more clear .It is best choice for residential area and public water.

可选配件：透视镜、检修口、收集板、排气阀
Option: Sight Glass、Manhole、Nozzle plate、Air relief valve



D(mm)	800	900	1000	1200	800	900	1000	1200
H (mm)	1600	1600	1600	1600	2100	2100	2100	2100
E (mm)	520	520	520	600	520	520	520	600
A (mm)	1330	1330	1330	1330	1800	1800	1800	1800
F (mm)	115	115	140	165	115	115	140	165
B (mm)	550	550	550	650	800	800	800	800
C (mm)	350	350	350	350	350	350	350	350
P (mm)	690	760	830	980	690	760	830	980
G (mm)	60	60	60	60	60	60	60	60

型号 Model	进出水口径 (inches) Pipe size	过滤面积 (m²) Filter Area	流量 (m³/h) Design Flow	砂量 (kg) Sand Weight	砾石 (kg) Gravel Weight	缸头体积 (m³) Valve Volume	缸头重量 (kg) Valve Weight
YSG-D15800	2.0	0.50	15.0	470	200	1600	1.55
YSG-D15900	2.0	0.64	19.2	590	255	1600	1.90
YSG-D151000	2.0	0.79	23.7	729	301	1600	2.28
YSG-D151200	2.0	1.13	33.9	842	490	1600	3.15
YSG-D20800	2.0	0.50	15.0	811	200	2000	1.98
YSG-D20900	2.0	0.64	19.2	1035	255	2000	2.45
YSG-D201000	2.0	0.79	23.7	1280	301	2000	2.92
YSG-D201200	2.0	1.13	33.9	1634	490	2000	4.05

注：特殊型号，可加工定做。(Note: special model, can be customized processing)

臭氧反应罐 Ozone reactor

专用臭氧反应罐是由世界著名臭氧设备制造商提供技术，再广泛吸收国外臭氧消毒先进工艺和技术基础上，并结合我司多年来水处理设备研究成果，而研制成功的水处理臭氧消毒设备，广泛适用于水处理。

The special ozone reaction tank widely absorb foreign advanced technology and ozone disinfection technology, combined with our many years of research on water treatment equipment, water treatment equipment and the successful development of ozone disinfection, widely used in water treatment.



型号 Model	直径 (mm) Diameter	进出水口径 Pipe size	高度 (mm) Height	型号 Model	直径 (mm) Diameter	进出水口径 Pipe size	高度 (mm) Height
YSL-600A	600	50	1500	YSL-600B	600	50	2000
YSL-700A	700	50	1500	YSL-700B	700	50	2000
YSL-800A	800	63	1500	YSL-800B	800	63	2000
YSL-900A	900	63	1500	YSL-900B	900	63	2000
YSL-1000A	1000	63	1500	YSL-1000B	1000	63	2000
YSL-1200A	1200	63	1500	YSL-1200B	1200	63	2000

活性炭吸附罐 Activated carbon filter

活性炭过滤器，能够吸附前经过 滤中无法去除的余氯，对水中异味，胶体及色素重金属离子，有吸附去除作用，还具有降低COP的作用，可以进一步降低入口进水的SDZ值，可吸附氧、氨、碘、溴等非金属物质，银、砷、钴、六价铬、汞等金属离子。

Activated carbon filter, can be filtered to remove the residual chlorine in the adsorption of water, odor, colloid and pigment heavy metal ions, also has reduced the role of COP, can further reduce the entrance of water SDZ value, adsorption of oxygen, ammonia, iodine, bromine and other non-metallic materials, silver and arsenic six, cobalt, chromium, mercury and other metal ions



型号 Model	直径 (mm) Diameter	进出水口径 Pipe size	高度 (mm) Height	型号 Model	直径 (mm) Diameter	进出水口径 Pipe size	高度 (mm) Height
YSL-f600	600	50	1500	YSL-F600	600	50	2000
YSL-f700	700	50	1500	YSL-F700	700	50	2000
YSL-f800	800	63	1500	YSL-F800	800	63	2000
YSL-f900	900	63	1500	YSL-F900	900	63	2000
YSL-f1000	1000	63	1500	YSL-F1000	1000	63	2000
YSL-f1200	1200	63	1500	YSL-F1200	1200	63	2000

注：特殊型号，可加工定做。(Note: special model, can be customized processing)

纸芯过滤器 CARTRIDGE FILTERS

纸芯过滤是一种即方便且有效的过滤方法，当池水通过过滤器的纸芯，水中的漂浮物变阻隔再纸芯当中，而干净的水便流回池中。随着纸芯使用日久，污物积累在纸芯上，使缸内的压力变大，而且流量减少，而在压力超标时，便要取出纸芯做清洗（可用清水射在纸芯上，把污物冲去便可）。

Cartridge filtration is an effective trouble-free proven method of filtration. Pool water enters the filter and passes through a polyester single element cartridge. Suspended particles are trapped and the water is returned to the pool. As the build-up of dirt in the element increases, so the water pressure rises and the flow decreases. When the pressure reaches an unacceptable level the element must be removed and cleaned.

型号 Model	高度 A(mm) Height	高度 B(mm) Height	直径 C(mm) Diameter	直径 D(mm) Diameter	过滤面积 (m²) Filtration Area	流量 (m³) Designed Flow
AF 25	445	387	225	397	2.25	5.5
AF 50	625	567	225	397	4.63	11.4
AF 75	805	747	225	800	7.00	17.0
AF 100	985	927	225	397	9.38	22.9
AF 150	1165	1107	225	397	13.72	33.4

纤维沙缸连水泵组合 Filtration Combo

YSF系列过滤组合设计适用于私家泳池、景观水处理，家庭用户提供出色的过滤性能和简单的安装使用方案。

包括顶出玻璃纤维过滤沙缸、多功能6路沙缸、水泵和底座整体组合

Designed for easy set-up domestic pool, "PSF" Series filtration combo offers the right solution for home user who is looking for user-friendly and excellent

filtration performance. FSF Series Filtration Combo includes top mount fiberglass filter tank, 6-way multiport valve, swimming pool pumps attached with base.



特性:

- 最大工作压力: 36psi/2.5bar
- 最大操作温度: 43° C (109° F)
- 接管管口公英制通用
- 石英砂规格: 0.5-1.2mm

Highlight Features:

- Max operating pressure 36psi/2.5bar
- Max temperature of 43° C (109° F)
- Universal standard of union connection provided
- Suggested size of media: 0.5-1.2mm

型号 Model	最大流量 (m³) Max Flow Rate	沙缸型号 Filter	水泵型号 Pump	接管尺寸 (mm) Valve Connections	装沙量 (kg) SAND
YFS400	8	YSG-400	0.5HP	1.5inch 50mm	35
YFS450	10	YSG-450	0.75HP	1.5inch 50mm	50
YFS500	12	YSG-500	1.0HP	1.5inch 50mm	65
YFS525	14	YSG-525	1.0HP	1.5inch 50mm	65
YFS625	17	YSG-625	1.5HP	1.5inch 50mm	150

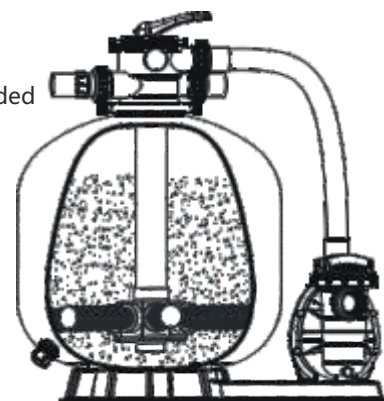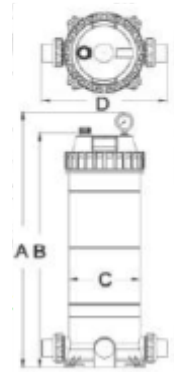

全自动吸污机 Automatic dirt suction machine



WY450

功率: 200w, 线缆30m, APP操控, 可爬墙遥控, 过滤精度180um/5um, 工作时间: 1/2/3/小时

Power: 200w, cable 30m, APP control, Wall-climbing remote control, filtration accuracy 180um/5um, Working hours: 1/2/3hr



WY3165

充电时常4-6h, 电池容量7800MA, 使用温度0-40° 可爬墙遥控, 续航时间: 2小时

Charging is often 4-6h, battery capacity 7800MA, Use temperature 0-40° can climb the wall remote control, Battery life: 2 hours



CM-600

线缆18/25m, 手机APP操控, 路径规划, 防缠绕, 可爬墙遥控, 工作时间: 1/2/3/4小时

Cable 18/25m, mobile APP control, road Path planning, anti-winding, climbing wall remote control, Working hours: 1/2/3/4 hours



YCH-200D

功率: 350w, 线长40m, 可爬墙遥控, 工作时间: 4/6/8小时

Power: 350w, line length 40m, Wall-climbing remote control, working time: 4/6/8 hours



LIBERTY 300

循环周期1.5h, 锂电池容量: 4800MA, 清洁覆盖区域: 池底、池壁, 可爬墙遥控, 召回功能

Cycle time 1.5h, lithium battery capacity 4800MA, clean covered area: Pool bottom, pool wall, can climb the wall remote control, Recall function



HJ-1700

功率: 150w, 线缆15m, 输出电压24v, 过滤精度180um, 工作时间: 1/1.5/2/小时

Power: 150w, cable 15m, output Voltage 24v, filtration accuracy 180um, Working hours: 1/1.5/2/hour



YRC32

功率: 16.1w, 工作时间90分钟, 充电4-5h, 工作模式: 直线/曲线行走

rated power: 16.1w, work 90 minutes, charge 4-5hours, Working mode: straight line/curve walking



YRC26

功率: 16.1w, 工作时间90分钟, 充电4-5h, 工作模式: 直线/曲线行走

rated power: 16.1w, work 90 minutes, charge 4-5hours, Working mode: straight line/curve walking

手持吸污机 Hand-held suction machine



HJ 30

功率: 30w, 电池容量3500AH, 续航时间60min, 充电时间: 3-4小时, 输出电压12.6v, 过滤精度250um, 使用深度最大2米

Power: 30w, battery capacity 3500AH, Battery life 60min, charging time: 3-4hours, Output voltage 12.6v, filtration accuracy 250um, Maximum depth of use 2 meters



Y53

功率: 61.7w, 工作时间90min, 充电时间: 4-5小时, 流量: 95L/minL, 使用深度最大3米

Power: 61.7w, working time 90min, Charging time: 4-5 hours, flow rate: 95L/minL, Maximum depth of use is 3 meters



Y85

功率: 180w/220v, 流量: 60L/min, 电源线: 1.5m

Power: 180w/220v, flow: 60L/min, power cord: 1.5m, triangle suction cup



Y90

功率: 2.5w, 工作时间90分钟, 充电4-5h, 特点: 省电但性能强, 吸污力强

rated power: 2.5w, work 90 minutes, charge 4-5hours, Power saving but strong performance, strong suction power,

不锈钢石英砂过滤器 Stainless steel sand filters

缸体采用环保、优质的不锈钢材料合成，坚固耐用、不易磨损、不易破裂。球形缸体，缸壁厚度均匀，能均匀承受水压。可选择检修口设计，易于更换缸体的滤料。应用于大型泳池、比赛游泳池、公共游泳池、水上乐园等。

The cylinder is made of environment-friendly and high-quality stainless steel, which is durable, durable, and not easy to be worn out or broken. The spherical cylinder has uniform wall thickness and can withstand water pressure evenly. The design has access, easy to install and maintain. Compete in large swimming pools, swimming pools, public swimming pools, water parks, etc.

可选配件：透视镜、检修口、收集板、排气阀

Option: Sight Glass、Manhole、Nozzle plate、Air relief v



顶出沙缸
Top-mount sand filter



侧出沙缸
Side sand filter




法兰式沙缸
Side-mount sand filter




卧式沙缸
To -mount sand filter

不锈钢顶式沙缸 Top-mount sand filter							
型号 Model No.	缸径(mm) Tank dia	高度(mm) Height	管径(inch) Pipe size	过滤面积(m²) FILTER AREA	砂重(kg) Silica sand	流量(m³/h) Flow	工作压力(kg/cm²) Pressure
D400	400	800	1.5	0.13	70	6.7	2.5
D500	500	870	1.5	0.22	100	10.8	2.5
D600	600	970	1.5	0.36	170	16.4	2.5
D700	700	1000	2.0	0.41	190	21.3	2.5
D800	800	1160	2.0	0.51	300	26.8	2.5
D900	900	1260	2.0	0.65	400	32.6	2.5
D1000	1000	1270	2.0	0.81	500	40.3	2.5



大型不锈钢法兰式沙缸 Side-mount sand filter							
型号 Model No.	缸径(mm) Tank dia	高度(mm) Height	管径(inch) Pipe size	过滤面积(m²) FILTER AREA	砂重(kg) Silica sand	流量(m³/h) Flow	工作压力(kg/cm²) Pressure
D1200	1200	1450	3	1.14	1100	55	2.5
D1400	1400	1570	4	1.56	1900	76	2.5
D1600	1600	1760	4	2.01	2300	100	2.5
D1800	1800	2040	4	2.54	2900	129	2.5
D2000	2000	2240	6	2.97	4600	147	2.5
D2200	2200	2520	6	4.10	5800	218	2.5
D2300	2300	2550	6	4.43	6000	220	2.5
D2500	2500	2680	8	4.89	6700	240	2.5



四位控制蝶阀组功能表
4-way control group valve



五位控制蝶阀组功能表
5-way control group valve

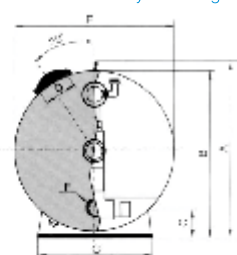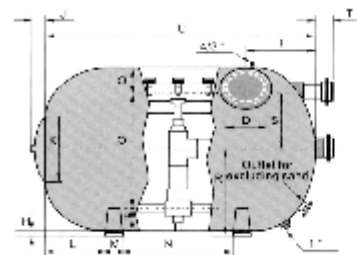

不锈钢卧式沙缸 Top-mount sand filter																					
Code	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
040416	1800	1700	400	φ 400	1600	φ 160	1320	100	1050	120	φ 500	480	260	870	990	250	360	900	440	100	2350
040418	2020	1920	400	φ 400	1800	φ 160	1480	100	1050	120	φ 500	500	260	1080	1090	250	460	1000	440	100	2800
040420	2260	2160	600	φ 400	2000	φ 160	1640	120	1050	120	φ 500	700	300	1100	1270	350	380	1120	550	160	3000
040424	2660	2560	600	φ 400	2400	φ 160	2300	120	1050	120	φ 500	900	300	1480	1470	350	580	1320	550	160	3000
040425	2760	2660	600	φ 400	2500	φ 160	2300	120	1050	120	φ 500	1050	300	1600	1520	350	630	1370	550	160	3000

注：特殊型号，可加工定做。(Note: special model, can be customized processing)

不锈钢毛发过滤器 Stainless steel hair filter

不锈钢毛发过滤器，是美容美发、洗浴、泳池、污水、化工等行业必备的预处理，能有效拦截污水中的头发及其他杂物，充分保证市政管道和处理设备的正常运行，还用于江、河水时在进水泵吸入前除水中的草类及漂浮物，保证水泵正常运行。


The stainless steel hair filters, pretreatment of hairdressing, bathing, swimming pool, sewage and chemical industries are necessary, can have areas of waste water to intercept and other debris, sufficient to ensure the normal operation of municipal pipelines and processing equipment, is also used in the river when the water pump into the water before the addition of grasses and floating to ensure the normal operation of the pump.

维护与保养：1、及时清理滤网过滤后的杂物，以防堵塞

Maintenance and maintenance: 1, the timely cleaning of the filter screen after the debris, in order to prevent clogging

2、定期清洗内部表面的污物


2、 regular cleaning of internal surface dirt

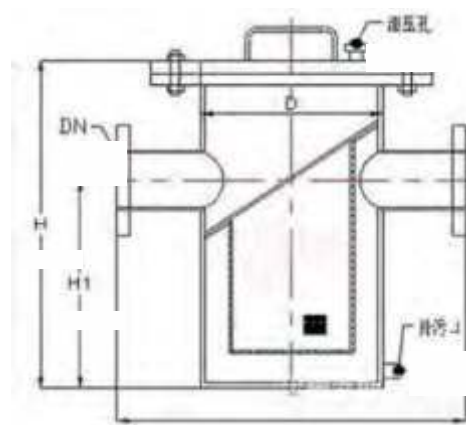

型号 Model	进出水口径(mm) ValveSize	产品尺寸 (mm)	最佳流量 Designflow
YSS-D50	50	160*270*235	10-15
YSS-D65	65	220*340*350	15-30
YSS-D80	80	220*340*350	30-60
YSS-D100	100	275*400*400	60-90
YSS-D125	125	275*400*400	90-120
YSS-D150	150	275*400*450	120-150
YSS-D200	200	350*500*490	150-180
YSS-D250	250	400*560*520	200-250


注：特殊型号，可加工定做。(Note: special model, can be customized processing)

泳池泵 Pool pump

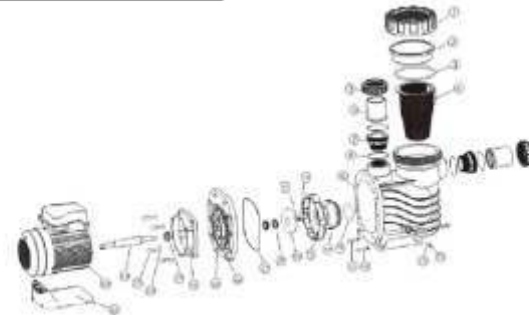

- | | | |
|----------|-----------|-----------|
| 1. 大螺母 | 11. 弹性垫圈 | 21. O型密封圈 |
| 2. 透明盖 | 12. 螺塞 | 22. 后盖法兰 |
| 3. O型密封圈 | 13. O型密封圈 | 23. 螺栓 |
| 4. 过滤篮 | 14. 平垫圈 | 24. 机电法兰 |
| 5. 活接螺母 | 15. 螺栓 | 25. 轴承 |
| 6. 管接头 | 16. O型密封圈 | 26. 平垫圈 |
| 7. 牙套 | 17. 螺栓 | 27. 螺栓 |
| 8. O型密封圈 | 18. 叶轮前盖 | 28. 机电轴 |
| 9. 桶体 | 19. 水叶轮 | 29. 电机 |
| 10. 螺栓 | 20. 机械密封 | 30. 底座 |

性能曲线图 Performance chart

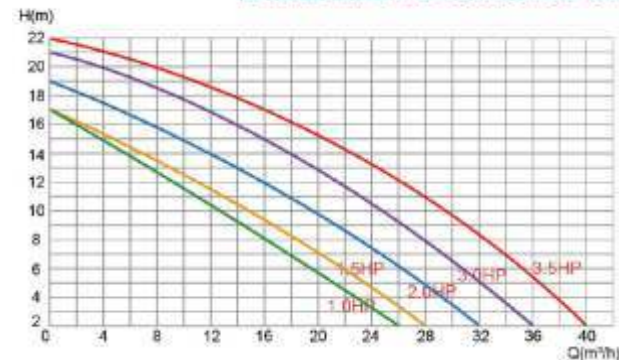

特点 Features:

电机采用外部通风设计，绕组设计先进，液体部分由高强度工程塑料制成，经久耐用。高容量的过滤器有助于减少清洁工作，具有良好的性能和效率，可加快注水（灌溉）速度并提高能源效率。适用于：游泳馆，工业用水，海洋馆，水上乐园等。

series is desgined according to the Principles of hydraulics. Its motor is with external ventilation design, and the winding design is advanced,liquids part is made of high reinforceengineering plastic which is durable. The strainer with high capacity helps reducing the cleaning work.It is with good performance and high effi-ciency.It accelerates water injection (irrigation)rate and improves energyefficiency. It is applicable to:swimminpool,industrial water, oceans pavilion,water park,ect.

参数表 Technical Characteristics

型号 Model	电压 Volt	功率P1 Power		转速 Rotating Speed (r/min)	最大扬程 Maximum lift (m)	最大流量 Maximum flow (h/m³)	接口尺寸 Port Size (inch)	净重 NW (kg)	毛重 GW (kg)
		KW	HP						
YKP-100	220V/50Hz	0.75	1	2850	17.0	25	2"	20/19	22/21
YKP-150	220V/50Hz	1.1	1.5	2850	17.0	28	2"	20/20	22/22
YKP-200	220V/50Hz	1.5	2.0	2850	19.0	32	2"	20/20	22/22
YKP-300	220V/380v /50Hz	2.2	3.0	2850	21.0	36	2"	22/21	24/23
YKP-350	220V/50Hz	2.6	3.5	2850	22.0	40	2"	23.3/23.3	25.8/25.8

●水泵电压可根据需要定做 (Pump voltage can be customized)

泳池泵 Pool pump


KP水泵 三相电机 KP pump with three-phase motors



附件
Accessories



Kp水泵 单相电机 KP pump with single-phase motors

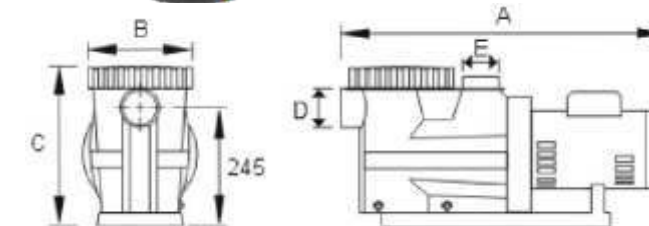


特点 Features:

Kp水泵是技术成熟和最受用户认可的水泵之一、电机是内散热设计，电机绕组设计先进，材质是优质铝合金，整机噪声低，振动小,使用寿命长;采用优质专用机械密封件;水泵泵体、导叶、叶轮结构设计独特过流部件是用高强度工程塑料制成。适用于桑拿、泳池、工业用水、海洋馆、水上乐园等。

KP series pump is one of the pumps with mature technology and it is approved by customer. Its motor is with internal ventilation design, and the winding design is advanced.

The material of this pump is aluminum of high quality, it is under low-noise and less-vibration and durability. It applied the mechanical seal of good quality. The pump casing, guide vane and impeller applied unique design with max flow, max head and low noise.The strainer is easy to install. 2" inlet and outlet. Liquids part is made of high reinforce engineering plastic. It is applicable to : swimming-pool,industrial water, oceans pavilion, water park, etc.

性能曲线图 Performance chart

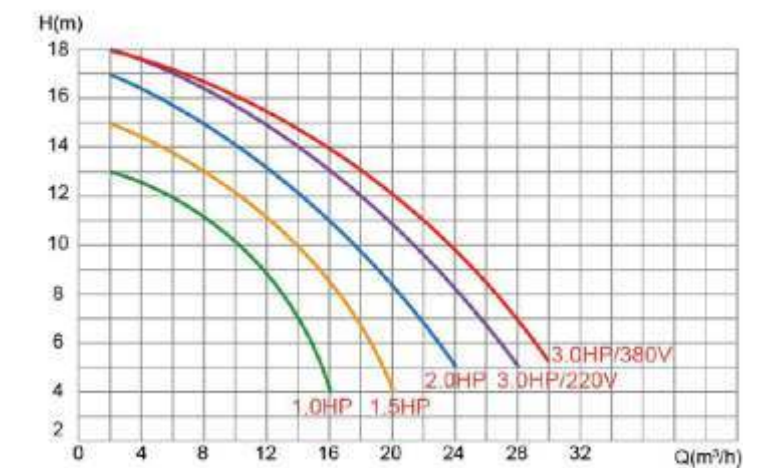

参数表 Technical Characteristics

型号 Model	电压 Volt	功率P1 Power		长度 Length A (mm)	宽度 Width B (mm)	高度 Height C (mm)	最大扬程 Maximum lift (m)	最大流量 Maximum flow (h/m³)	接口尺寸 Port Size D/E (inch)
		KW	HP						
KP-100	220V/50Hz	0.75	1.0	635	192	294	13.0	16	2"
KP-150	220V/50Hz	1.1	1.5	645	192	294	15.0	20	2"
KP-200	220V/50Hz	1.5	2.0	645	192	294	17.0	24	2"
KP-300A	220V/50Hz	2.2	3.0	645	192	294	18.0	28	2"
KP-300B	380V/50Hz	2.2	3.0	680	192	294	18.0	32	2"


●水泵电压可根据需要定做 (Pump voltage can be customized)

“SS1” 系列水泵 “SS1” Series Pump




适用于温泉浴池、小型游泳池、水处理设施、装饰性水池等循环系统的液体循环及过滤。

Apply to liquid circulation and filtration of Spa and bath, small size swimming pools, water treatment facility and decoration pool...etc.

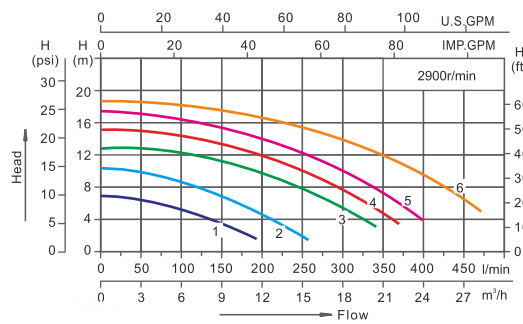

参数表 Technical Characteristics

Model 型号	Power(P1) 功率		安培 (Amps) 220V	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 curves	包装尺寸 Packing size (mm)	(Qty/20')
	kW	HP						
SS1-025	0.37	0.50	1.9	195	7	1	560×275×385	490
SS1-035	0.55	0.75	2.7	255	10	2	560×275×385	490
SS1-050	0.75	1.0	3.8	340	12.5	3	560×275×385	490
SS1-075	0.9	1.2	4.6	370	15	4	560×275×385	490
SS1-100	1.1	1.5	5.8	390	17.5	5	560×275×385	490
SS1-150	1.5	2.0	7.0	470	18.5	6	560×275×385	490

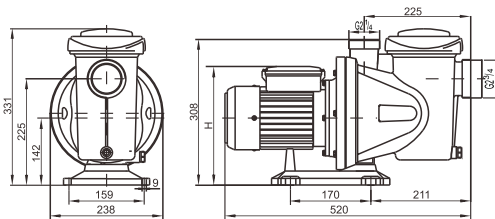


“SS2” 系列水泵 “SS2” Series Pump




适用于温泉浴池、小型游泳池、水处理设施、装饰性水池等循环系统的液体循环及过滤。

Apply to liquid circulation and filtration of Spa and bath, small size swimming pools, water treatment facility and decoration pool...etc.

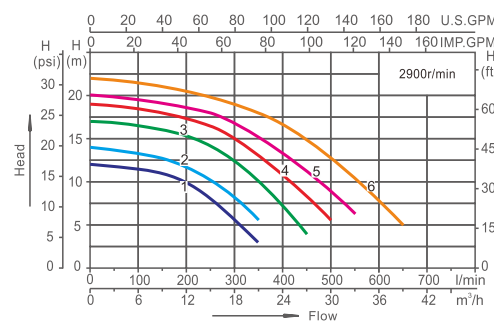

参数表 Technical Characteristics

Model 型号	Power(P1) 功率		安培 (Amps) 220V	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 curves	包装尺寸 Packing size (mm)	(Qty/20')
	kW	HP						
SS2-120	0.9	1.2	4.6	350	12.5	1	655×305×390	372
SS2-150	1.1	1.5	5.2	380	16.5	2	655×305×390	372
SS2-200	1.5	2.0	7.0	500	20	3	655×305×390	372
SS2-250	1.85	2.5	8.6	560	19.5	4	655×305×390	372
SS2-300	2.2	3.0	10	600	22	5	655×305×390	372
SS2-400	3.0	4.0	14	650	25	6	655×305×390	372

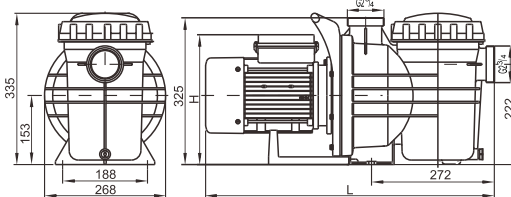

CN 系列水泵 CN Series Pump




防锈保护外壳,防止水分渗入马达内部。功率足、扬程高、水量大,高效率循环。低噪音,运行稳定,泵盖有真空密封性,防漏水性能好,毛发器容量大。水泵主要配件由耐高温低温的高强度塑料制造而成,持久耐用,是别墅、私家及商用泳池、水景、养殖、温泉桑拿浴池的理想选择。

Anti rust crust can stop water penetrating to the engine; Enough power, high head, big flux and high efficient circulation. Run quietly with smaller noise. High airtightness sealed strong suction ability, big capacity of hair box. Main parts are durable as they're made of special plastic. It's good choice for private and commercial swimming pools, water garden, breeding, hot spring and sauna spa.

参数表 Technical Characteristics


型号 Model	Voltage KW	Power		Hmax (m) 最大扬程	Qmax (m³/h) 最大流量	Port Size	
		HP	电压			(mm)	(inches)
PN-200	1.5	2	220V/380V/50Hz	18	35	63	2"
PN-300	2.2	3		20	38		
PN-400	3	4	380V/50Hz	20	45	63 / 75	2" / 2.5"
PN-500	3.8	5		21	50		
PN-550	4	5.5		22	60	75	2.5"
PN-750	5.5	7.5		22	75		

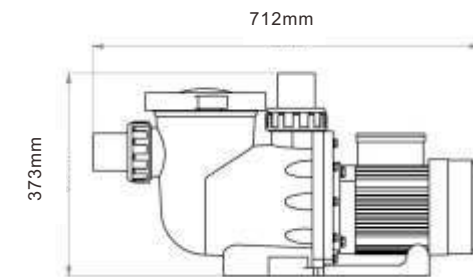

SP 系列水泵 SP Water Pump

SP水泵是根据水力字原理设计的泵体,电机是内散热设计,电机绕组设计先进;水泵过流部件是用高强度工程塑料制成,经久耐用;滤篮容是大,大大减少了清洗工作;性能好,效率高,加快了注水(灌溉)速度并提高了能源效率。适用于桑拿、泳池、工业用水、海洋馆、水上乐园等。

SP series is designed according to the Principles of hydraulics] ts motor is with internal ventilation design 1 and the winding design is advanced. Liquids part is made of high reinforce engineering plastic which is durable. The strainer with high capacity helps reducing the cleaning work. It is with good performance and high efficiency. It accelerates water injection(irrigation)rate and improves energy efficiency. It is applicable to : swimming pool , industrial water oceans pavilion: water park



参数表 Technical Characteristics

型号 Model	外形尺寸 (mm) Overall dimension	出水口直径 (inch) Outlet	进水口直径 (inch) Inlet	电压 (mm) Volt	规格 (mm) Specification	包装尺寸 L*W*H (mm) Package
SP-1005	600*219*276	2"	2"	220V	1.0HP	700*240*300
SP-1503	610*219*276				1.5HP	
SP-2001					2.0HP	
SP-3004					3.0HP	
SPT-3002	660*219*276				380V	



BP系列铸铜水泵 BP Series Brass Pump



BP 150




BP 100



BP 50-75


泵体用铜铸造成型，坚固的一体式结构，经久耐用，在淡水和海水中均具有抗腐蚀性，滤篮容量大，减少清洗工作；流量大，扬程高，加快注水速度并提高能源效率；适用于各种泳池、工业用水、海洋馆、水上乐园等。

Brass pumps are molded with cast copper it is solid,durable and reliable.It resists corrosion in fresh wawter and salt water.The strainer with high capacity helps reducing cleaning work.Large flow high-lift.It accelerates water injection rate and improves energy efficiency.Applicable to:swimming pool,industrial water,oceans pavilion,water park,etc....

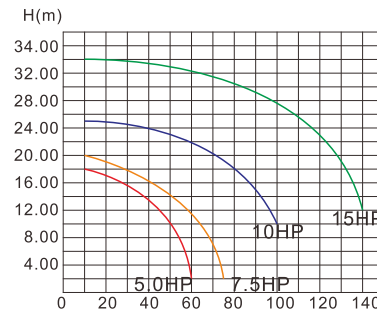

参数表 Technical Characteristics

型号 Item Number	规格 Specification	长度 Length A(mm)	宽度 Width B(mm)	高度 Height C(mm)	进水口直径 InletΦ D(inch)	出水口直径 OutletΦ E(inch)	电压 Voltage (V)
BP 50	5.0HP	625	270	360	3"	2.5"	380V
BP 75	7.5HP	665	270	360	3"	2.5"	380V
BP 100	10.0HP	840	340	440	4"	3"	380V
BP 150	15.0HP	875	340	490	4"	4"	380V

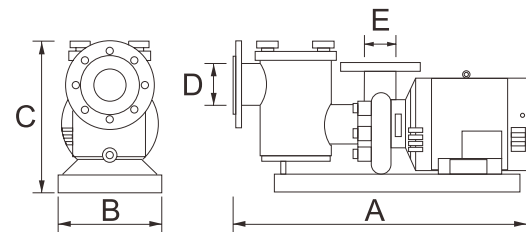

CCPB系列铸铁水泵 CCPB Series Commercial Pump



CCPB 50-75




CCPB 100

泵体用铸铁铸造成型，坚固的一体式结构，经久耐用。滤篮容量大，减少清洗工作；流量大，扬程高，加快注水速度并提高能源效率；适用于各种泳池、工业用水、海洋馆、水上乐园等。


Metal pumps are molded with cast iron. It is solid and durable.The strainer with high capacity helps reducing cleaning work.Characterized by high performance and efficiency.It accelerates water injection rate and improves energy efficiency.Applicable to:swimming pool,industrial water,oceans pavilion,water park,etc....

铸铁泵性能曲线图
Performance chart

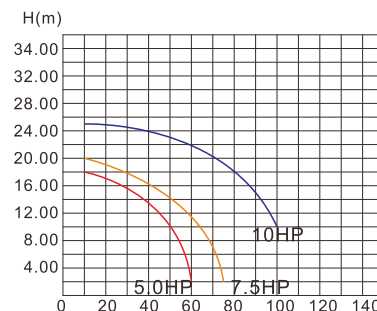

参数表 Technical Characteristics


型号 Item Number	规格 Specification	长度 Length A(mm)	宽度 Width B(mm)	高度 Height C(mm)	进水口直径 InletΦ D(inch)	出水口直径 OutletΦ E(inch)	电压 Voltage (V)
CCPB 50	5.0HP	705	270	360	DN80	DN65	380V
CCPB 75	7.5HP	772	270	360	DN80	DN65	380V
CCPB 100	10.0HP	940	340	445	DN100	DN80	380V

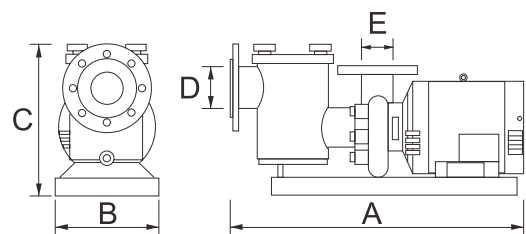

CU 系列不锈钢泵 CU Type Metal Water Pump

泳池不锈钢水泵能耗小，扬程高，流量大，运行噪音低。泵体采用 304 不锈钢铸造，坚固耐腐蚀；叶轮，过滤网采用不锈钢材料制造。电机转轴为不锈钢 304。操作简单，使用方便，维修容易，有零配件供应。防护等级 IP55，绝缘等级 F

Swimming pool stainless steel pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in 304 steel. Long time lasting and anti corrosion. Impeller and filter nets are also steel. Convenient to hand, easy to maintain. Spare parts available.Protect grade:IP55,Insulation Grade:F.

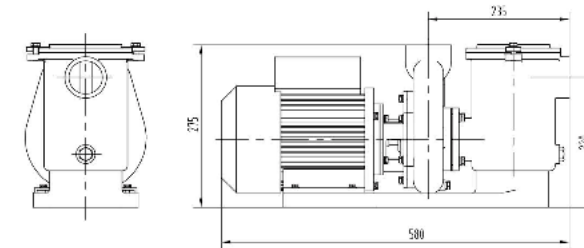


参数表 Technical Characteristics

型号 Model	电压 Volt	功率P1(Power)		最大扬程 Hmax(m)	最大流量 Qmax(m³/h)	管径 Port size(mm)	转速(r/min) Rotating speed
CU-200	220V/380V	1.5	3	18	38	63 2.0"	2800
CU-300	50Hz	2.2	4	19	42		
CU-400	380V/50Hz	3	5	20	50		

CUD 系列不锈钢泵 CUD Type Metal Water Pump

泳池不锈钢水泵能耗小，扬程高，流量大，运行噪音低。泵体采用 304 不锈钢铸造，坚固耐腐蚀；叶轮，过滤网采用不锈钢材料制造。电机转轴为不锈钢 304。操作简单，使用方便，维修容易，有零配件供应。防护等级 IP55，绝缘等级 F

Swimming pool stainless steel pump, low energy requirement, high height performance, big flow and low noise. Main pump is made in 304 steel. Long time lasting and anti corrosion. Impeller and filter nets are also steel. Convenient to hand, easy to maintain. Spare parts available.Protect grade:IP55,Insulation Grade:F.

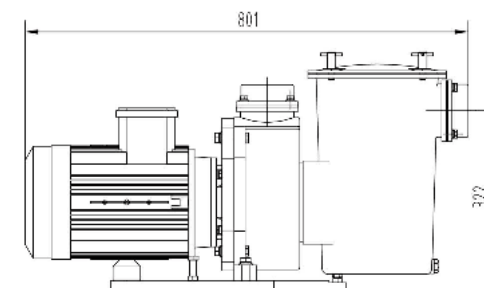

参数表 Technical Characteristics




型号 Model	电压 Volt	功率P1(Power)		最大扬程 Hmax(m)	最大流量 Qmax(m³/h)	管径 Port size(mm)	转速(r/min) Rotating speed
CUD-40	380V/50Hz	3	4	18	48	90 3.0"	2800
CUD-55		4	5.5	19	60		
CUD-75		5.5	7.5	20	80		
CUD-100		7.5	10	21	95		
CUD-150		11	15	22	110		

喷浪装置 Swim Jet






Swim jet PK3000型

- 喷浪装置的机架以不锈钢制造，前端和把手部分用耐蚀不锈钢
 - AISI304抛光材料，可装在混凝土、木质或预制板墙壁上。
 - 水泵，电动机3kW
 - 控制箱由电流接触器和超负荷保护装置组成。
 - 空气混合控制
 - 空气混合软管
 - 软管连接器
 - 软管夹
 - 吸入端、压出端软管
 - 阀
- * Jet Swim house made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting in concrete, wood or building block walls.
- * Lpump power: 3KW
- * Control box including contactor and overload protection
- * Air mixture control
- * Air mixture hose
- * Hose connectors
- * Hose clamps
- * Hose for suction and pressure
- * Valves

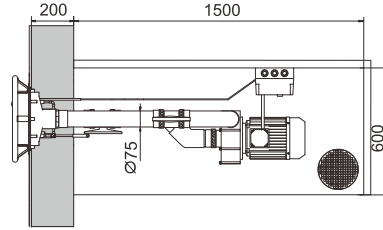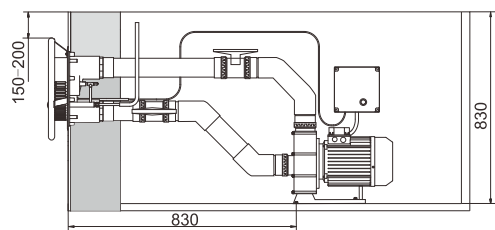

Swim jet PK2000型

- 喷浪装置的机架以不锈钢制造，前端和把手部分用耐蚀不锈钢
 - AISI304抛光材料，可装在混凝土、木质或预制板墙壁上
 - 水泵，电动机3kW
 - 控制箱由电流接触器和超负荷保护装置组成。
 - 空气混合控制
 - 空气混合软管
 - 软管连接器
 - 软管夹
 - 吸入端、压出端软管
 - 阀
- * Jet Swim house made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting in concrete, wood or building block walls.
- * Lpump power: 3KW
- * Control box including contactor and overload protection
- * Air mixture control
- * Air mixture hose
- * Hose connectors
- * Hose clamps
- * Hose for suction and pressure
- * Valves

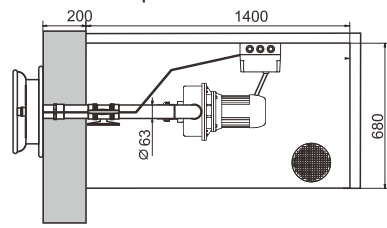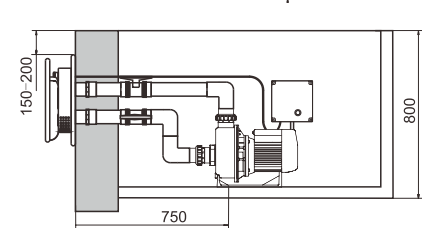

Technical Characteristics 参数表

型号 Model	功率 Power (KW)	电压 Voltage (V)	水泵接口 Pump Connection (mm)	喷水量 water capacity (L/Min)	材质 Jet Material
PK3000	3	380	Ø75	70	铜、不锈钢 bronze、stainless steel
PK2000	2.18	220	Ø63	35	不锈钢 stainless steel

智能泳池推进器 Smart pool push

游泳水流推进器游泳机产生平稳的，平静的，强大的水流，非常适用于任何的后院泳池，并且从零到 1:10/100 码可调。现在您可以以将任何泳池变为无尽泳池！

- 最优质的游泳水流
- 使用简单，运转经济
- 新建或者现有的泳池
- 用于全家娱乐
- 低冲击运动
- 平台镶嵌或壁挂选项

对于健身或娱乐而言，游泳水流推进器为您的泳池 增加一整个新的维度。游泳水流推进器系统包括两部分：远距离安装的为游泳水流提供能源的液压动力装置和安装在泳池上的游泳水流推进装置，水流速度由 遥控装置控制。

Swim current thrusters swim machines produce smooth, calm, powerful currents that are ideal for any backyard pool and are adjustable from zero to 1:10/100 yards. Now you can turn any pool into an infinity pool!

- best quality swimming current
 - easy to use, economical to operate
 - new built or existing pool
 - for family entertainment
 - low impact motion
 - platform mount or wall mount options
- For fitness or entertainment, the swimming current thruster adds a whole new dimension to your pool.

The water flow propulsion system consists of two parts: a hydraulic power unit that is remotely installed to provide energy for the water flow and a water flow propulsion unit that is installed in the pool. The water flow velocity is controlled by a remote control device.


游泳池水流推进器规格：

1. 需要39"水深；
2. 通过VGB2008认证；
3. 5HP 游泳水流发生器；
4. 丙烯酸和316L不锈钢结构；
5. 可为银灰色和天蓝色
6. 需要220-volt，30-amp GFCI 的能源。



Swimming pool flow propeller specifications:

1. Requires 39 "water depths;
2. Passed VGB2008 certification;
3. 5hp swimming current generator;
4. Acrylic acid and 316L stainless steel structure;
5. Can be silver gray and sky blue;
6. Requires 220-volt, 30-amp GFCI energy.

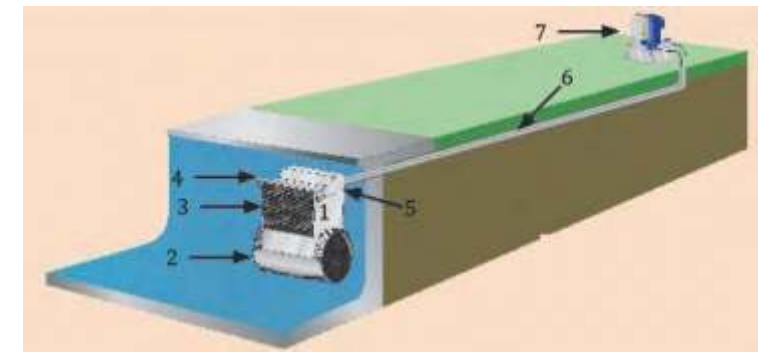


壁挂式游泳池水流推进器系统

1. 泳池格栅
2. 出水格栅
3. 进水格栅
4. 不锈钢扶手架
5. 壁挂支架
6. 液压软管系统
7. 动力装置

Wall - mounted swimming pool water propeller system

1. Pool grille;
2. Water outlet grille;
3. Water inlet grille;
4. Stainless steel armrest;
5. Wall hanging bracket;
6. Hydraulic hose system;
7. Power plant.

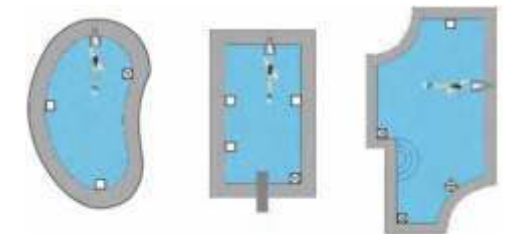


安装位置 (Installation position)

- ☐ 可选的理想位置 (Optional ideal location)
- ☒ 不适宜的位置 (Inappropriate location)

为了确保游泳水流中没有湍流，将游泳水流推进器安装在远离周围泳池壁、长椅，台阶等的位置非常关键。安装的游泳装置应距离相邻的泳壁或障碍物至少24英寸的距离，或者距离相对的泳壁或障碍至少 12英尺的距离。。

In order to ensure that there is no turbulence in the swimming current, it is critical to position the swimming current pusher away from the surrounding pool wall, benches, steps, etc. The swimming apparatus shall be installed at least 24 inches from the adjacent wall r obstacle or at least 12 feet from the opposite wall or obstacle.

Ec系列盐氯发生器 EC series salt chlorine generator

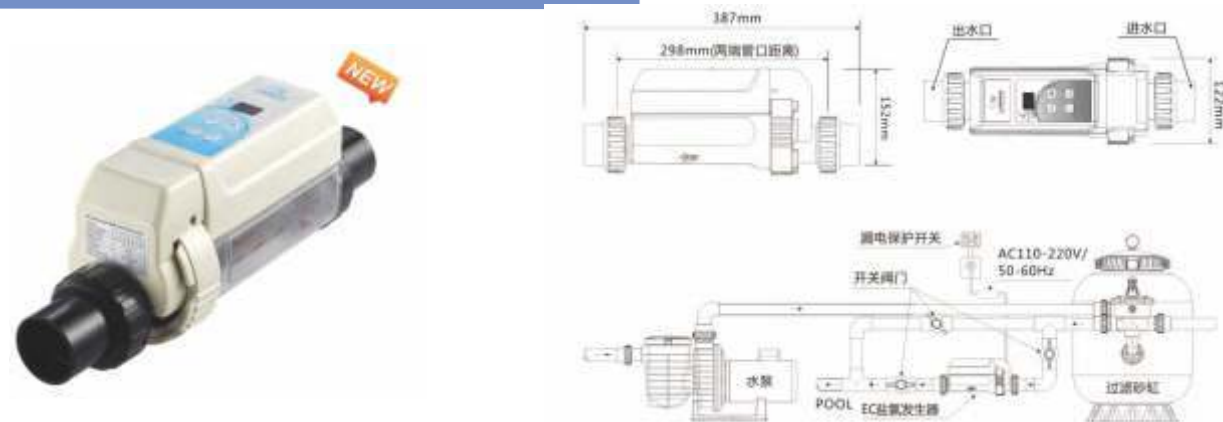

参数表 Technical Characteristics						
型号 Model	尺寸 (mm) Size	工作电压 (V) Working voltage	工作电流(A) Working current	产氯量 (g/h) Producing chlorine content	进出水口径 (inch) GPM	适用泳池 (m) Swimming pool
YS-EC8	387*122*152	Dc24	4	8	1.5/Φ50mm	≤40
YS-EC12				12		≤60
YS-EC16				16		≤80
YS-EC20				20		≤100

Yx系列盐氯发生器 YX series salt chlorine generator



YX50CL

电解盐机（次氯酸钠发生器）：是由主机、电解发生器两大部分组成。它是通过人工在水池内、按一定比例投放海盐或食用盐。通过循环方式把海盐或食用盐进行电分解（ $2\text{NaCl} + 2\text{H}_2\text{O} \xrightarrow{\text{电}} 2\text{NaOH} + \text{H}_2 \uparrow + \text{Cl}_2 \uparrow$ ）（ $\text{Cl}_2 + 2\text{NaOH} = \text{NaCl} + \text{NaClO} + \text{H}_2\text{O}$ ），从而制成次氯酸钠进行水池杀菌消毒。

Saltwater solutions:

Salt chlorinators, are an alternative means of sanitizing your pool with chlorine using the process of electrolysis.

The electrolysis process is achieved by passing the salt water solution through an electrolytic cell which converts sodium chloride (salt) in the water into chlorine gas which, when dissolved in water become sodium hypochlorite (liquid chlorine).

Safe and respecting the environment, this technology brings you:

- Relaxation: Your pool is automatically disinfected.
- Safety: Reduction in chlorine storage and handling.
- Comfort: Clean, safe and crystal-clear water.
- Health and well-being: Therapeutic, saltwater does not irritate eyes and dry out skin.


参数表 Technical Characteristics				
型号 Model	设备尺寸 (mm) machine size	产氯量 (g/h) Producing chlorine content	工作电压 (V) Voltage	适用泳池 (m) Swimming pool
YX10CL	44x37x19	10	220	≤15
YX15CL		15		≤35
YX20CL		25		≤50
YX30CL		30		≤70
YX50CL		30		≤100

250系列泳池水质监控仪 CCOREL 250 Series Pool Controller

ORP/PH 数显监控仪自动维护泳池和温泉上的消毒剂ORP和水质PH。所有运转功能都很清晰的显示在控制面板上，同时这个操作又安全又容易重新设置，在其它监控仪里是找不到这些功能的。默认PH值是7.5，如低于7.4，水质酸性太高会导致腐蚀和刺激伤害眼睛。如高于7.6，水质碱性太高会导致刺激伤害眼睛，同时出现水云量，水结垢，水渍，减低消毒效果。

SIMPLE TO OPERATE

The CCOREL 250 ORP/PH Digital Controller automatically maintains both sanitizer ORP (oxidation-reduction potential or redox) and water pH in pools and spas. All operating functions are clearly labeled and accessible from the front panel, with safety and easy -reset features not found on other controllers. The default PH control level is 7.0. Below 6.9, the water is too acidic and causes corrosion and eye irritation. Above 7.5, it is too alkaline and causes are irritation plus water cloudiness, scaling, stains and reduced sanitizer efficiency. The default ORP control level is 650mV, values for prevention of germs and bacteria.

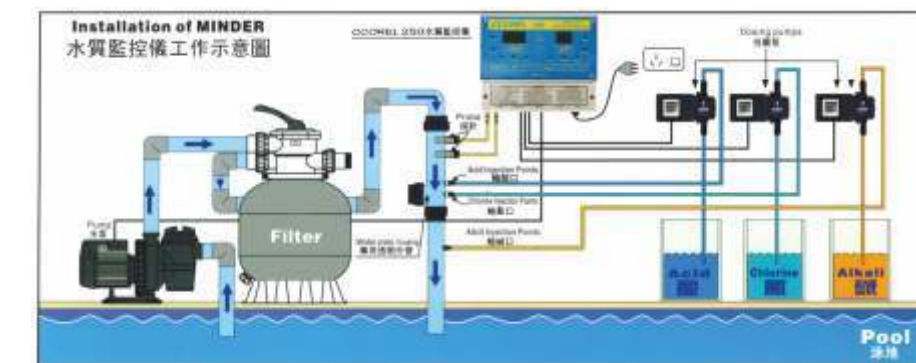

美国“卫星”
Chemtrol 2000 #

水质监控仪监控PH·ORP
可接电脑远程控制智能型产品
Size: 240x300x15mm



美国“卫星”
Chemtrol 250 #

水质监控仪监控PH·ORP
Size: 240x200x120mm



P066-368TI
美国“米顿罗”投药泵



VTP-008
彩虹自动投药器300#
Automatic Choline/Bromine
off-Line feeder



意大利“西科”高科技电子计量泵

603 #
最大压力: 8 bar
流量: 8 l/h
工作形式: 电子式
电压: 220V

803 #
最大压力: 5 bar
流量: 45 l/h
工作形式: 电子式
电压: 220V



VTP-009
CL-100 自动投药器
Automatic Choline/Bromine off-Line feeder



C-6125P
最大压力: 2.1 bar
流量: 30 l/h
工作形式: 机械式
电压: 220V

C-660P
最大压力: 4 bar
流量: 13 l/h
工作形式: 机械式
电压: 220V

水处理药剂 Water treatment



国内质量最好的
游泳池水消毒片/泡腾片

泳池消毒片是目前国内品质最好的游泳池水消毒泡腾片（高端品质）。是大型水上乐园、游泳馆、学校、酒店、花园小区等游泳池首选消毒剂。含量高，具有广谱、高效、瞬时的杀菌效果，可杀灭肠道致病菌，化脓性球菌、致病性酵母菌并能灭活病毒。可防止水中细菌超标及水体发绿。产品三证齐全，还应用于自来水、桶装水等水体的消毒，对人体安全。按1000立方水投4-6公斤/日，可直接投洒或用投药泵投

Brand swimming pool disinfection tablets is currently the best quality swimming pool water disinfection effervescent tablets (high quality). It is the first selection of swimming pool pool in large water park, schools, hotels, gardens .With broad-spectrum, high efficiency, instantaneous sterilization effect, it can kill intestinal bacteria, pyogenic bacteria, pathogenic yeasts and can inactivate the virus. Bacteria in the water and prevents excessive ,the water turn green. Three guarantee cards are included, it is safe for human body . it is also used in water, bottled water and other bodies of water disinfection. 1,000 cubic meters of water administered by 4-6 kg / day ,may be administered directly or sprinkle with dosing pumps.

 VTP-027 消毒片 Disinfection tablet 2克速溶氯片 2g instant chlorine tablets 含氯量50% Content of 50% 内装50袋 Within 50 bags 1KG/袋 1KG/bag	 VTP-027A 消毒片 Disinfection tablet 20克速溶氯片 20g instant chlorine tablets 含氯量50% Content of 50% 内装50袋 Within 50 bags 1KG/袋 1KG/bag	 VTP-027B 消毒片 Disinfection tablet 20克速溶氯片 20g instant chlorine tablets 含氯量90% Content of 90% 内装50袋 Within 50 bags 1KG/袋 1KG/bag
 VTP-028 速溶消毒粉 Disinfectant 含氯量90% Content of 90% 内装50袋 Within 50 bags 1KG/袋 1KG/bag	 VTP-028 A 消毒颗粒 Disinfectant 含氯量90% Content of 90% 内装50袋 Within 50 bags 1KG/袋 1KG/bag	 VTP-028 B 200g缓溶氯片 Disinfectant 含氯量90% Content of 90% 内装50袋 Within 50 bags 1KG/袋 1KG/bag
 VTP-029 20克速溶氯片 20g instant chlorine tablets 含氯量50% Content of 50% 内装五袋 Within 5 bags 1KG/袋 1KG/bag 4.5KG/桶 4.5 KG/barrel 8KG/桶 8KG/barrel	 VTP-029A 2克速溶氯片 2g instant chlorine tablets 含氯量50% Content of 50% 内装五袋 Within 5 bags 1KG/袋 1KG/bag 4.5KG/桶 4.5 KG/barrel 8KG/桶 8KG/barrel	 VTP-029B 200克缓溶氯片 200g instant chlorine tablets 含氯量90% Content of 50% 内装五袋 Within 5 bags 1KG/袋 1KG/bag 4.5KG/桶 4.5 KG/barrel 8KG/桶 8KG/barrel

水处理助剂 Water treatment chemicals



VTP-072
6130水质检测盒
6130 Water test box



VTP-073
OTO水质检测盒
OTO water test box



VTP-075
PH补充液(240ml)
PH Refill Solution (240ml)



VTP-076
OTO补充液(240ml)
OTO Refill Solution (240ml)



VTP-060
氯酶素澄清剂
Enzyme clarifier



VTP-061
氯霸除藻剂
algicide



VTP-064
氯中和剂
Chlorine neutralizer



VTP-066
尿素降解剂
Urea depressant



VTP-040
酵素澄清剂
Enzyme clarifier



VTP-041
除藻剂
algicide



VTP-045
无氯杀菌剂
Chlorine-free fungicide



VTP-046
水质保护剂
Water quality protectant



VTP-047
绿水急救剂
Green water first aid



VTP-052
阳离子杀菌剂
Cationic bactericide



VTP-050
沙缸管道清洗剂
Sand cylinder pipe cleaning agent



VTP-053
池壁清洁剂
Pool wall cleaner



VTP-047
PH增高剂
PH enhancer



VTP-052
PH降低剂
PH reducer



VTP-050
絮凝剂
flocculant



VTP-053
除藻剂
algicide

低压紫外线消毒器 Low tension UV disinfection device

我公司生产法兰侧开、法兰对开、侧进上出、丝口等常规性紫外形消毒器，以及分体式、自动清洗性、旁通式等不同形式的紫外线消毒器。为了应对客户的各种需求，我公司可根据客户的要求定制不同规格、不同灯管数量、不同型号以及有特殊要求的 紫外线消毒器。

Our company produces the regular violet shape disinfector such as flange-side opening, flange-side opening, side in, top out, silk mouth, and other different forms of ultraviolet disinfector such as split type, automatic cleaning, bypass type. In order to meet the various needs of customers, our company can customize different specifications, different lamp number, different models and have special requirements of ultraviolet disinfector.



紫外线灯管专用插头 Special plug for ultraviolet lamp
高亮金属指示灯 Highlight metal indicator light
纯铜3C认证电源线 Pure copper 3C certified power cord
卫生级304不锈钢 Sanitary grade 304 stainless steel

参数表 Technical Characteristics					
型号 Model	外形尺寸 (mm) Overall dimension	灯管数量及规格 Lamp tube quantity and specification	总功率 (W) Total power	处理水量 (T/h) Treatment capacity	备注 Note
YUV-10	273*51*92	10*1	10W	0.23	管夹 (Pipe clamp)
YUV-21	500*63.5*110	21*1	21W	1	管夹 (Pipe clamp)
YUV-40	930*63.5*310	40*1	40W	2	管夹 (Pipe clamp)
YUV-80	930*89*310	80*1	80W	4	一体电箱 Integrated electrical box
YUV-160a	930*89*310	80*2	160W	6	一体电箱 Integrated electrical box
YUV-120	1250*89*310	120*1	120W	8	一体电箱 Integrated electrical box
YUV-160b	930*89*310	80*2	160W	12	一体电箱 Integrated electrical box
YUV-240	930*133*373	80*3	240W	15	一体电箱 Integrated electrical box
YUV-320	930*133*373	80*4	320W	20	一体电箱 Integrated electrical box
YUV-360	1250*159*410	120*3	360W	30	一体电箱 Integrated electrical box
YUV-480	1250*159*410	120*4	480W	40	一体电箱 Integrated electrical box
YUV-600	1250*219*410	120*5	600W	50	一体电箱 Integrated electrical box
YUV-720	1250*219*410	120*6	720W	60	一体电箱 Integrated electrical box
YUV-840	1250*219*410	120*7	840W	70	一体电箱 Integrated electrical box
YUV-960	1250*219*410	120*8	960W	80	一体电箱 Integrated electrical box
YUV-1080	1250*219*410	120*9	1080W	90	一体电箱 Integrated electrical box
YUV-1200	1250*219	120*10	1200W	100	分体电箱 Fission electric box
YUV-1500	1650*273	150*10	1500W	120	分体电箱 Fission electric box
YUV-1800	1650*325	150*12	1800W	150	分体电箱 Fission electric box



Yk6003挂壁式泳池灯 Wall mounted type pool light

材料: 不锈钢304
可选光源:
1. 100W/12V卤素灯珠
2. LED 96珠 10W/12V
(单色或七彩)
3. LED 144珠 15W/12V
(单色或七彩)
电线: 3 x 1.5mm² x 1.5m
防水等级: IP68



Material: Stainless Steel 304
Available:
1. 100W/12V Halogen light bulb
2. 96 LED Bulbs 10W/12V
(White color / Auto color change)
3. 144 LED Bulbs 15W/12V
(White color / Auto color change)
Cable: 3 x 1.5mm² x 1.5m
Waterproof standard: IP68



Yk6005挂壁式泳池灯 Wall mounted type pool light

材料: ABS+UV
可选光源:
1. 100W/12V卤素灯珠
2. LED 144珠 15W/12V
(单色或七彩)
3. LED 252珠 25W/12V
(单色或七彩)
4. LED 9x1W/12V
(单色或七彩)
5. LED 12x1W/12V
(单色或七彩)
6. LED 18x1W/12V
(单色或七彩)
电线: 2 x 1.5mm² x 1.5m
防水等级: IP68

Material: ABS+UV
Available:
1. 100W/12V Halogen light bulb
2. 144 LED Bulbs 15W/12V
(White color / Auto color change)
3. 252 LED Bulbs 25W/12V
(White color / Auto color change)
4. LED 9x1W/12V
(White color / Auto color change)
5. LED 12x1W/12V
(White color / Auto color change)
6. LED 18x1W/12V
(White color / Auto color change)
Cable: 2 x 1.5mm² x 1.5m
Waterproof standard: IP68



YSK-022 LED水池灯 LED underwater lamp



钢化玻璃
全不锈钢灯体
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	7x1W 6x1W 48x0.067W	RGB	24V/12V

YSK-023 LED水池灯 LED underwater lamp




钢化玻璃
全不锈钢灯体
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	21X1W	RGB	24V

YSK-024 LED水池灯 LED underwater lamp

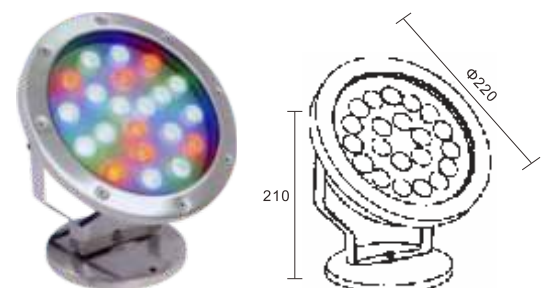


钢化玻璃
全不锈钢灯体
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	21X1W 18X1W	RGB	24V

YSK-031 LED水池灯 LED underwater lamp

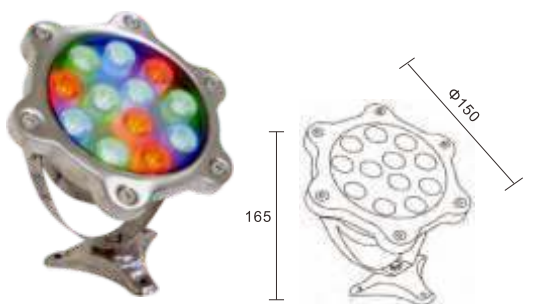

钢化玻璃
全不锈钢灯体
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	21X1W	RGB	24V/12V

YSK-1230 LED全不锈钢埋地灯 LED Stainless steel underwater lamps



钢化玻璃
全不锈钢灯体、预埋件
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body, Plastic recessed box
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	10x3W 三合一七彩	RGB	24V

YSK-1420 LED全不锈钢埋地灯 LED Stainless steel underwater lamps



钢化玻璃
全不锈钢灯体、预埋件
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body, Plastic recessed box
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	6x1W	RGB	24V/12V

YSK-1520 LED全不锈钢埋地灯 LED Stainless steel underwater lamps



钢化玻璃
全不锈钢灯体、预埋件
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body, Plastic recessed box
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	3x1W 1x1W 30x0.067W	RGB	24V/12V

YSK-1327 LED全不锈钢埋地灯 LED Stainless steel underwater lamps



钢化玻璃
全不锈钢灯体、预埋件
配套电缆线长度可选
可选LED光源
防护等级IP68

Tempered glass
Stainless steel body, Plastic recessed box
Optional cable length
LED Lighting source
IP68

光源 Lighting source	功率 Wattage	可用颜色 Different color available	电压 Voltage
LED	10x1W 12x1W	RGB	24V/12V

QSL-1257-1

QSL-1257-2

泳道线 Lane line



YST301
泳道分隔线收架
Lane line reel
包装尺寸: 150x980x108mm
size: 150x980x108mm



YST310
Φ110普通型泳道线
Φ110 Normal Swimming
pool lane rope



YST311
Φ120六棱型泳道线
Φ120 Six rowed Swimming
pool lane rope



YST312
Φ150六棱型泳道线
Φ150 Six rowed pool lane line



YST312
Φ150型泳道线
Φ150 Six rowed pool
lane line



YST313
泳池浮波泳道线
Spiral arc Swimming
pool lane rope



YST314
Φ110圆弧形泳道线
Φ110 circle Swimming
pool lane rope



YST315
Φ150风车型泳道线
Φ150 Six rowed pool
lane line



不锈钢清洁车



YST320
泳池预埋件
Embedded cup



YST321
泳池收紧器
Hook



YST322
进口泳池塑料收紧器
Hook



YST323
泳池收紧器
Hook



YST330
浮板
kickboards



YST331
成人救生衣
Adult life jacket



YST332
儿童救生衣
lifejacket for children



YST334
Φ72cm塑料救生圈
Φ72cm synthetic lifebuoy




YST336
Φ73cm塑料救生圈
Φ73cm synthetic lifebuoy

水扶手 Handrail




SP-3034



本产品采用进口AISI-304或者AISI-316不锈钢(Φ42mm)制作, 水扶梯
可用于室外水泥地, 安装简易。Size: 800x800x270mm




SP-3001



Diameter 42mm polishing stainless steel railing.
For flanges, gaskets etc fixing. With plugs and screws.
Size: 800x1120x800mm




SP-3032B



本产品采用进口AISI-304或者AISI-316不锈钢(Φ42mm)制作, 水扶梯
可用于室外水泥地, 安装简易。Size: 800x225x470mm



SP-3002




Diameter 42mm polishing stainless steel railing.
With underpan, gaskets and fixing plugs and screws.
Size: 800x900x560mm

扶手组图 Handrail pictures



SP-3005

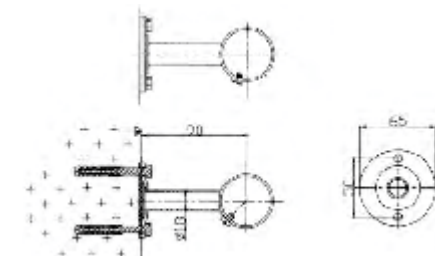

采用进口AISI-304或者AISI-316不锈钢(Φ42mm)制作, 适用于水泥池
和胶膜池。

AISI 304
AISI 316

救生椅 Lifeguard chair



SP-3003
不锈钢扶手
Size:550x380mm




组合式救生椅(豪华型)
Life-Gaurd chair
1900x900x800mm



救生椅(固定式)
Life-Gaurd chair
1900x900x800mm

出发台 Starting platform

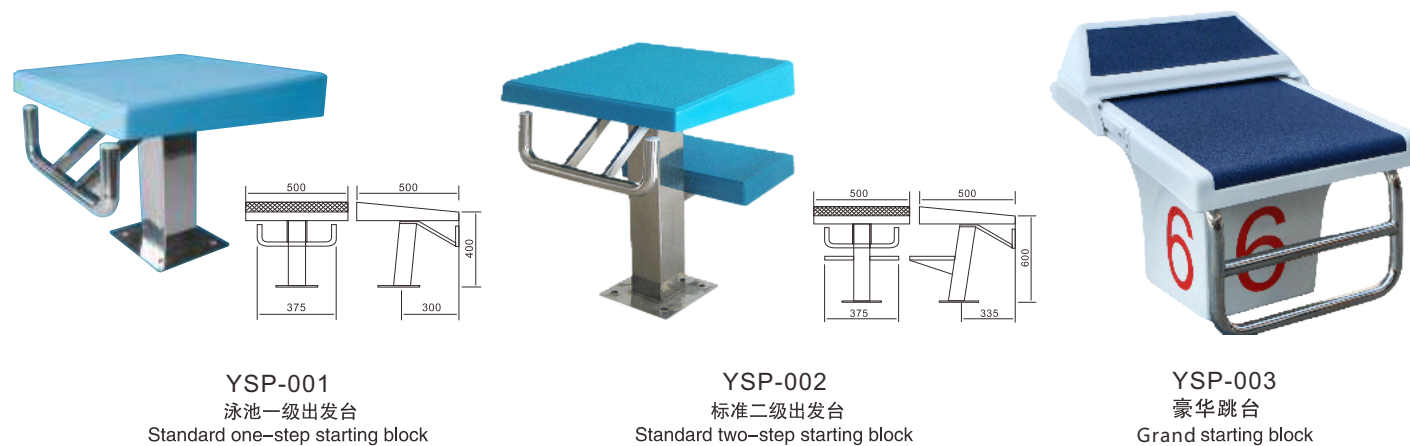

一级和二级标准出发台 Starting blocks					
型号 Model	名称 Description	材料 Material	颜色 Color	重量 Weight (kg)	尺寸 Dimension (mm)
YSP-001	标准一级出发台 Standard one-step starting block	不锈钢 Stainless steel 304 & FRP	天蓝色 Azury	20	520 x 520 x 450
YSP-002	标准二级出发台 Standard two-step starting block	不锈钢 Stainless steel 304 & FRP	天蓝色 Azury	26	520 x 520 x 650

YSC 扶梯 Model YSC-Ladders

本产品采用进口AISI-304或者AISI-316不锈钢(Φ42mm)制作, 提供不锈钢或塑料踏板 塑料踏板有极佳的防晒效果。
水扶梯可用于室内木建池或室外水泥地, 安装简易。


型号	说明
YSC-215	2个脚踏梯(不锈钢踏板)
YSC-315	3个脚踏梯(不锈钢踏板)
YSC-415	4个脚踏梯(不锈钢踏板)
YSC-515	5个脚踏梯(不锈钢踏板)



SS 扶梯 Model YSS-Ladders

SS ladders diameter 42mm polishing stainless steel ladders stainless steel tread Perfect curve designs.
The surface is antislippery. No minor faults with sharp side cape, fixed equipment.


型号 Item No.	Tread	Diameter mm	G.W kg	Ctn. Qty.	Volume m³	Dimension mm
SS-3356	3	4.2	21.6	1	0.101	1000x55x1837
SS-3357	4	4.2	25.9	1	0.115	1000x55x2085

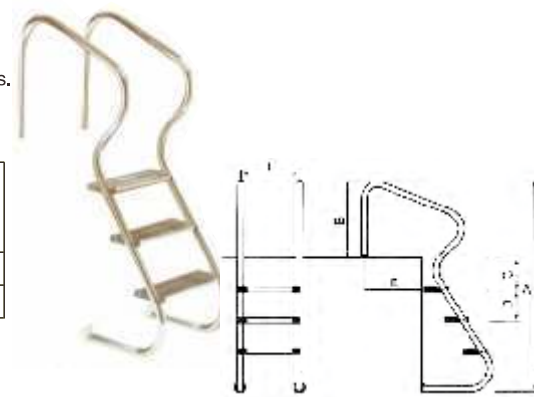

下水扶梯 Launching escalator


SF 扶梯 SF Ladder

型号 Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
SF-215	502	1330	650	640	180	200	250
SF-315	502	1580	650	640	180	200	250
SF-415	502	1830	650	640	180	200	250
SF-515	502	2080	650	640	180	200	250

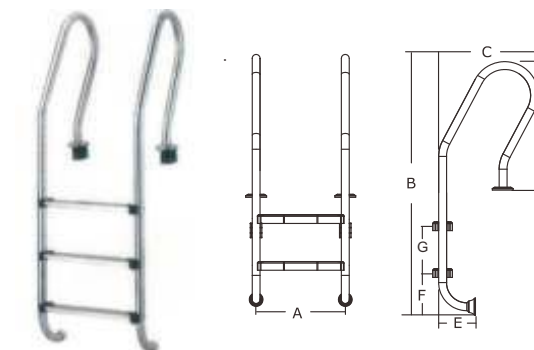


SL 扶梯 SL Ladder

型号 Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
SL-215	502	1330	650	640	180	200	250
SL-315	502	1580	650	640	180	200	250
SL-415	502	1830	650	640	180	200	250
SL-515	502	2080	650	640	180	200	250

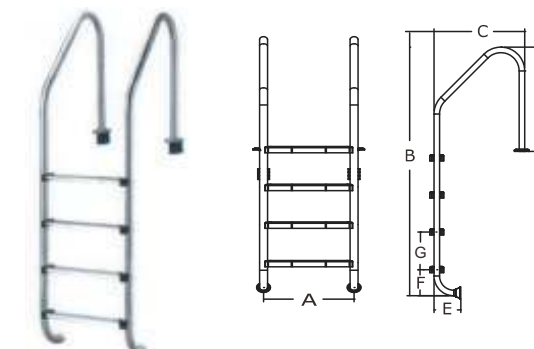

MU扶梯 MU Ladder

型号 Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
MU-215	502	1330	365	640	180	200	250
MU-315	502	1580	365	640	180	200	250
MU-415	502	1830	365	640	180	200	250
MU-515	502	2080	365	640	180	200	250


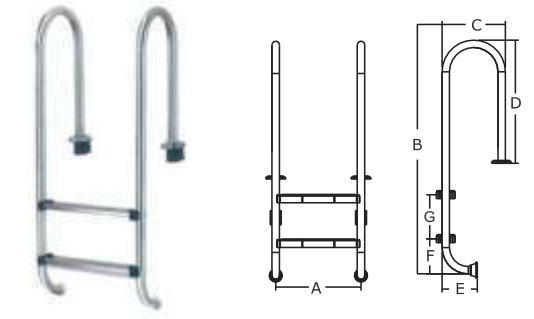


SP 扶梯 SP Ladder

SA ladders diameter 42mm polishing stainless steel ladders, stainless steel tread. Perfect curve designs. The surface is antislippery. No minor faults with sharp side cape.

本扶梯采用不锈钢304制造, 完美的曲线设计; 表面防滑。

型号 Item No.	踏板 Step	A mm	B mm	C mm	D mm	E mm	F mm
SP2+2	2+2	1150	1380	250	730	420	500
SP3+3	3+3	1150	1580	250	930	420	500
SP4+4	4+4	1360	1880	250	1230	420	500
SP4+4	4+4	1360	1900	250	1350	420	500
SP5+5	5+5	1700	2120	250	1530	420	500

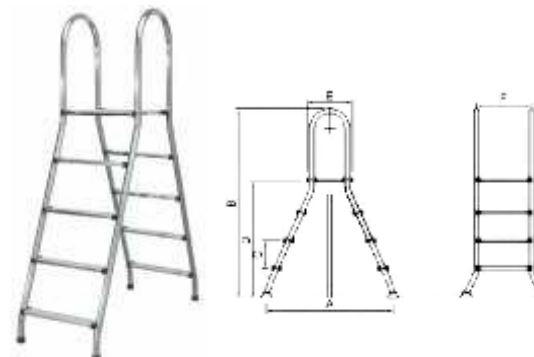

水疗冲击浴 Hydrotherapy shock bath



水疗冲击浴 Hydrotherapy shock bath



工程示意图



单边拍打浴



强力式按摩水疗

喷嘴可选：鸭咀/枪淋弹雨/扁四孔/水锤/
圆五孔/圆三孔等
材料：304不锈钢 接口尺寸：1.5"/2"



“热带雨林森林屋”按摩浴

材质：304#不锈钢



周身按摩浴

材质：304#不锈钢



彩虹门

材质：不锈钢



水帘门（可订做）

材质：304#不锈钢



SPA冲击浴




SPA冲击浴




木桶冲击浴

SPA水幕喷头



02"水幕 WATERFALL

产品编码	尺寸规格：W(mm)
03003001001	700*500*300
03003002001	700*500*500
03003003001	700*500*700
03003004001	700*500*1000



02A"水幕 WATERFALL

产品编码	尺寸规格：W(mm)
03003001002	700*500*300
03003002002	700*500*500
03003003002	700*500*700
03003004002	700*500*1000



B06"水幕 WATER CURTAN

产品编码	尺寸规格：W(mm)
03003001007	130*160*300
03003002007	130*160*500
03003003007	130*160*700
03003004007	130*160*1000



B04"水幕 WATERFALL

产品编码	尺寸规格：W(mm)
03003001004	130*160*300
03003002004	130*160*500
03003003004	130*160*700
03003004004	130*160*1000



C04"水幕 WATERFALL

产品编码	尺寸规格：W(mm)
03003001005	130*100*300
03003002005	130*100*500
03003003005	130*100*700
03003004005	130*100*1000



C04A"水幕 WATERFALL

产品编码	尺寸规格：W(mm)
03003001006	130*100*300
03003002006	130*100*500
03003003006	130*100*700
03003004006	130*100*1000




A06"弧钩 WATER CURTAN

产品编码	尺寸规格：W(mm)
03002001004	130*260*300
03002002004	130*260*500
03002003004	130*260*700
03002004004	130*260*1000



A04"弧钩 WATER CURTAN

产品编码	尺寸规格：W(mm)
03002001003	160*250*300
03002002003	160*250*500
03002003003	160*250*700
03002004003	160*250*1000



水枪 SF-01"

产品编码	尺寸规格：H(mm)
03005001016	2050*129
03005002016	2150*129
03005003016	2350*129
03005004016	2500*129



强制淋浴系统

产品编码	尺寸规格：W(mm)
03005003014	2050*1190
03005004014	2050*1240
03005005014	2050*1290
03005006014	2050*1390



- 产品特点**

 - 离心循环设计，压力高、风量。气流缓冲设计，噪音更低。
 - 起动力矩小，工作过程稳定、可靠。
 - 无油润滑设计，气体更纯净。
 - 表面磷化处理，静电喷涂，色泽均匀，附着力更强。
 - 功率配置范围广，产品使用寿命长。
- FEATURES**

 - Centrifugal vanes make high pressure, great outflow and low noise.
 - High quality engine ensures safe and steady effect.
 - Non-oil lubrication and pure compressed air.
 - Phosphorize disposition, regular coloring and adhesive strength.
 - Wide range of power, long life of this machine.

型号 Mode	额定电源 Voltage	额定功率 Power (W)	最大风压 Pressure (kPa)	真空 Vacuum (kPa)	最大风量 Output (m³/h)	正常使用压力 Pressure (kPa)	重量 Weight (kg)	外形尺寸 Dimensions (mm)
YSQ-750	220/380V/50Hz	750	20	-16	110	<12	14	289x288x315
YSQ-1100	220/380V/50Hz	1100	26	-20	135	<18	18.5	329x320x390
YSQ-1500	220/380V/50Hz	1500	28	-22	185	<20	25	338x328x357
YSQ-2200	380V/50Hz	2200	30	-24	240	<20	28	392x362x372
YSQ-3000	380V/50Hz	3000	35	-25	260	<25	38	415x384x400
YSQ-3800	380V/50Hz	3800	36	-26	280	<26	38	410x392x404
YSQ-4000	380V/50Hz	4000	40	-28	290	<28	45	413x392x404
YSQ-5500	380V/50Hz	5500	50	-38	380	<28	58	486x418x453
YSQ-550	380V/50Hz	5500	78	-47	320	<40	65	586x654x408
YSQ-7500	380V/50Hz	7500	75	-50	450	<38	100	594x830x468
YSQ-3000A	380V/50Hz	3000	55	-34	200	<40	40	602x372x470

感应控制器 Inductive Controller



型号	YTP-33301	YTP-33302
玲珑紫色水晶感应器 + 单路感应控制器（盘装）	Ø 130x65	66x72x115
钻石紫色水晶感应器 + 单路感应控制器（盘装）	Ø 130x70	66x72x115



型号	YTP-33305	YTP-33306	YTP-33307
钻石白色水晶感应器 + 单路感应控制器（盘装）	Ø 130x90	66x72x115	
按钮式水疗开关			
无线水疗控制开关（接收距离100m）			



型号	YTP-338	YTP-33303	YTP-340	YTP-33306
不锈钢&水晶感应器	Ø 90x40			
镀铬ABS&银色ABS感应器		Ø 90x40		
不锈钢斜柱&ABS感应器			Ø 115x90	
LED水下发光砖 133x133mm（七彩、红色、黄色、蓝色、绿色、白色） (Seven colors, red, yellow, blue, green, white)				



型号	YTP-33311	YTP-33309	YTP-33310	YTP-33312
小显示屏（墙挂）	270x150x30			
小显示屏（暗装）		265x130x30		
双面台式显示屏（双面双温）			270x140x100	
大显示屏（墙挂）				265x270x30

卡通冲击浴 Cartoon Impact Bath



Y-04 “海豚”冲击浴
H=1330mm



Y-08 “企鹅”冲击浴
H=1330mm



Y-03 “鲤鱼”冲击浴
H=1340mm



Y-02 “金龙”冲击浴
H=1450mm



Y-10小丑



Y-11 “金蟾”冲击浴
H 900mm



Y-06 “海狮”冲击浴
H=1400mm



Y-07 “小象”冲击浴
H=1320mm



Y-05 “海马”冲击浴
H=1400mm



Y-09海螺



Y-12
海马冲击浴



Y-13
海狮冲击浴



Size:
600,
800,
1000,
1200mm

Ø1200mm

Ø1500mm

Ø1000mm

水疗按摩床 Spa massage table



维其浴
235x120x190cm



盐浴水力按摩床
2150x1060x610mm



盐浴水力按摩床
2150x1060x570mm



带扶手水床
1830x690mm



水力按摩床
1860x680mm



带扶手水床
13个喷嘴
1800x680mm



水疗拍打床
Size: 1900X720mm


太空水疗躺床 Space spa lying bed



YS-6681

万千细微的有氧水气泡从躺椅垫背上涌出，包裹人体，在皮肤的表面形成水膜，细腻地轻抚人体的肌肤及走穴，一方面可恢复皮肤的张力及弹性、补充水份；另一方面可舒缓紧张的情绪，消除失眠等症状。

名称	型号	材质	长(mm)	宽(mm)
太空水疗躺床	YS-6681	亚克力	1996	880

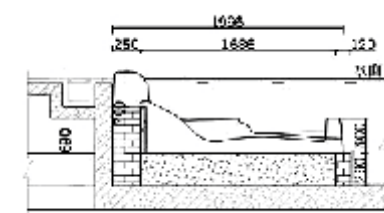


太空水疗座椅 Space spa seat



YS-6682

利用热水浸泡，让人体毛孔迅速张开，并有多组按摩喷头对人体的肩、背、臀部、足底进行按摩。


名称	型号	材质	长(mm)	宽(mm)
太空按摩座椅	YS-6682	亚克力	850	750

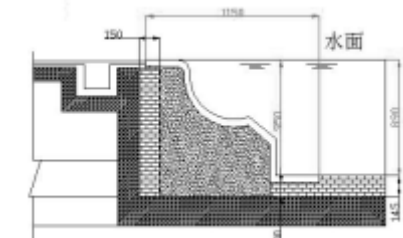

泳池防水胶膜 Swimming pool waterproof film



Non-slip vinyl liner

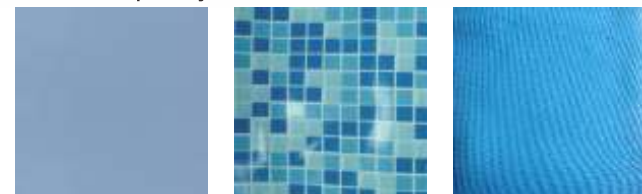

浅蓝泳池胶膜
Light blue

马赛克泳池胶膜
Mosaic

深蓝泳池胶膜
Dark blue

云彩蓝泳池胶膜
Blue white


型号 Model	规格 Size	厚度 (mm)
Light blue 浅蓝	1.83x25 (40) m	1.0/1.2/1.5
Mosaic 马赛克	1.83x25 (40) m	1.0/1.2/1.5/2.0
Blue white 云彩蓝	1.83x25 (40) m	1.0/1.2/1.5
Dark blue 深蓝	2x25 (40) m	1.0/1.2/1.5

结构图：
Instruction:




1. Inner frame of polyester web
2. Highly resistant PVC

安装细节：
Installation details:



注意：
Remark:

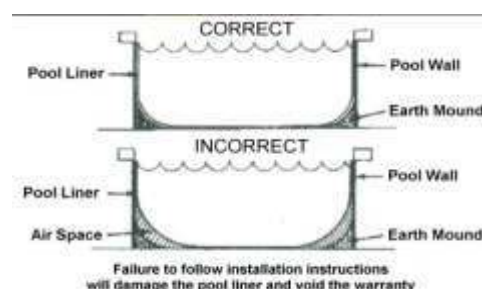

在游泳池初建过程中，胶膜能满足您所有的关于游泳池的梦想，为您创造出最美丽的游泳池。胶膜是唯一能满足法国关于游泳池专用膜标准的产品。特有的PVC制造技术，专用的保护层，专门设计的加强层。胶膜能够有效的抵抗紫外线，防止老化，变形；胶膜能够有效的抵抗水中/土中微生物的侵蚀。您所喜欢的形状，您能想象的任何颜色组合。不管您的游泳池是哪种情况；室内的还是露天，公共还是私家的，新建的还是重新翻修的，胶膜都能最好的满足您的要求。

Ideal for residential pools. Manufactured in reinforced PVC-P, this materials is the most used for lining pools thanks to enhanced malleability, resistance to tearing, ease of welding, resistance to discoloration by UV rays and with a wide range of available colors.

Made-to-measure liners are put together by high frequency welding machines at our facilities. Perfectly adaptable to any pool design or shape, with excellent watertight features, so you can forget about annoying leaks.

*Ensures total watertightness in odd shaped pools or pools with numerous steps.

*Highly flexible and adaptable.



*Smooth and pleasant to touch, it is easy to maintain and durable.

*Highly resistant to impacts and tearing.

*PVC does not release dioxins into the atmosphere and can be recycled.

*Compatible with concrete, prefabricated or steel panel pools. Can also be installed in pools with overflow.

全自动泳池盖 Fully automatic pool cover

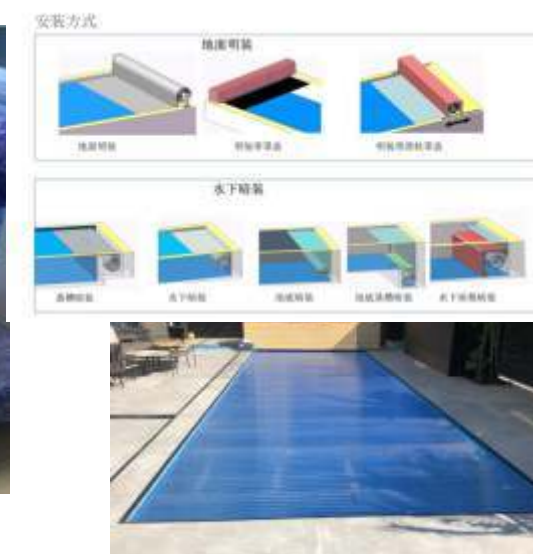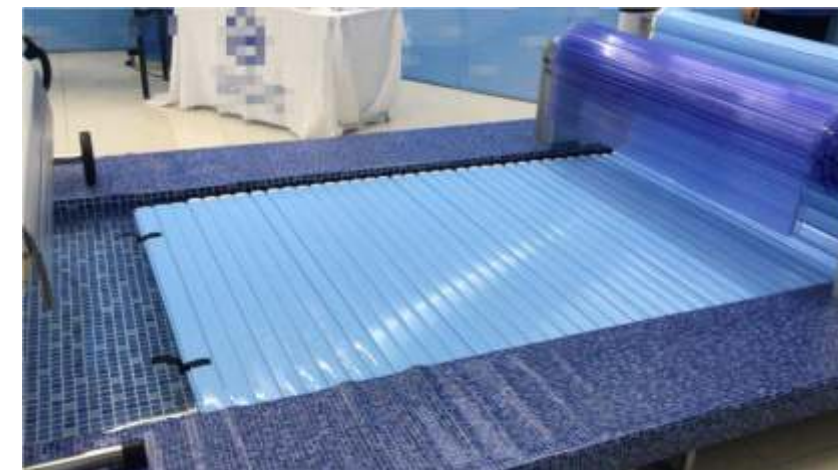

参数表 Technical Characteristics

型号 Model	规格 specifications		材料 Material	电机参数 Electric machine parameter	工作电压/功率 Operating voltage/power	电源电压 Supply voltage	安装方式 Installation
	长(m) Length	宽(m) Wide					
PCA300 -10	≤3	10	PVC	140Nm	24V/250W	220V/110V	安装在水上 Overwater
PCA400 -10	≤4	10					
PCU300 -10	≤3	10		140Nm	24V/250W	220V/110V	安装在水下 Underwater
PCU400 -10	≤4	10					

泳池盖膜 Pool cover



泳池保温覆美盖膜



溢水格栅 The overflow grid



YSG-401
高级锯齿格栅
18/25/30CM



YSG-402
新款可转弯三接口
18/20/25/30CM



YSG-403
高级宽面格栅
18/20/25/30CM



YSG-404
白色工字形格栅
18/25/30CM



YSG-405
高级T字形格栅
18/25/30CM



YSG-406
ABS波浪形格栅
18/25/30CM



YSG-407
高级双接口格栅
18/20/25CM




YSG-408
高级三接口格栅
18,25,30,35,40cm




YSG-409
白色PP格栅
18,20,25,30cm



YSG-410
骨色格栅ABS
30/25/20/18cm




YSG-411
ABS格栅 18,25,30cm




YSG-412
ABS格栅 30, 35cm


水晶马赛克瓷砖 Crystal Mosaic tiles




DL-313
面板颜色: 浅蓝色
单个尺寸: 25*25mm
整块尺寸: 300*300mm



DL-314
面板颜色: 深蓝色
单个尺寸: 25*25mm
整块尺寸: 300*300mm



DL-315
面板颜色: 橙色
单个尺寸: 25*25mm
整块尺寸: 300*300mm



DL-316
面板颜色: 绿色
单个尺寸: 25*25mm
整块尺寸: 300*300mm

撇渣器 skimmer



YS-462
电动撇渣器 内置水泵, 流量48L
Wireless electric skimmer
Built-in water pump, flow 48L



YS-469
电动撇渣器 内置水泵, 流量73L
Wireless electric skimmer
Built-in water pump, flow 73L



YS-233
支架池撇渣器
Bracket pool
skimming tool




YS-1019
土建池撇渣器
Civil construction
pond skimming tool

泳池回水口 Pool return port



SP1436
直插式清洁口
Eye Ball SKT
Size: DN50, DN63



SP1432
直插式喷嘴
Eye Ball SKT
Size: DN50, DN63



SP1433
直插式入水器
Water return
Size: DN50, DN63



SP1435
直插式溢水器
Gutter drain
Size: DN50, DN63



SP-1424
进出水口 water return
Φ50/1.5" 63/2"



SP1019
Gutter drain
溢水口
Φ50/1.5" 63/2"



SP1030
Main drain
圆形主排水器



SP1035
Main drain
防吸主排
12"X12"/9"X9"



SP1068
Check Valve 止回阀



SP1434
按摩喷嘴
massage jet



SP1450T
Nozzle 激流喷嘴



SP0052
Outlet Fitting (For Vinyl Pool)
回水口 (适用于胶膜池)



SP0028
Outlet Fitting (For Vinyl Pool)
回水口 (适用于胶膜池)



SP0024
不锈钢回水器2"螺纹
SS water return(screw)



SP0029
不锈钢溢水口2"螺纹
SS gutter drain(screw)



SP0022
不锈钢吸污口2"螺纹
SS suction nozzle(screw)



SP0026
不锈钢格栅
(尺寸可订制)



SP0027
Φ300mm
1030不锈钢主排水




SP0028
(尺寸可订制)
不锈钢1032-1031
25cmx25cm
30cmx30cm
50cmx50cm



SP0015
铜地漏
copper floor drain
Φ50/Φ63/Φ75/Φ90


泳池回水口 Pool return port

Vacuum Fitting (For Concrete Pool) 吸污配件(适用于水泥池)

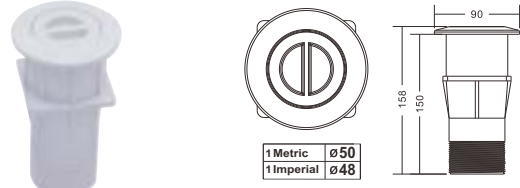

Model No 型号	Colour 颜色	Material 材料
SP2827C	White 白色	ABS+UV & PVC

Vacuum Fitting (For Vinyl Pool) 吸污配件(适用于胶膜池)

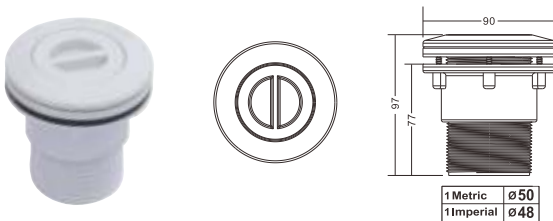


Model No 型号	Colour 颜色	Material 材料
SP2827V	White 白色	ABS+UV & PVC

Wall Return (For Vinyl Pool) 池壁回水器(适用于胶膜池)




Model No 型号	Colour 颜色	Material 材料
SP2829V	White 白色	ABS+UV & PVC

Wall Return 池壁回水器

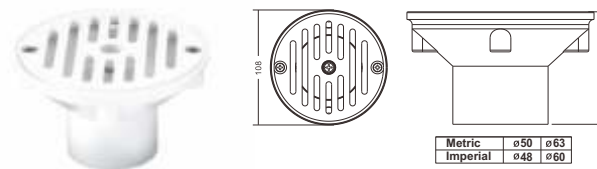


Model No 型号	Colour 颜色	Material 材料
SP2824	White 白色	ABS+UV & PVC

Suction Fitting 真空吸污配件

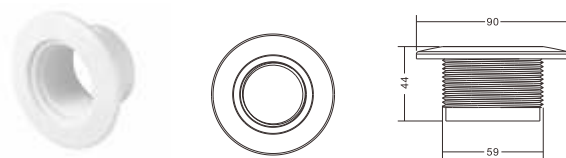


Model No 型号	Colour 颜色	Material 材料
SP1022	White 白色	ABS+UV

Wall Inlet (For Concrete Pool) 喷嘴(适用于水泥池)

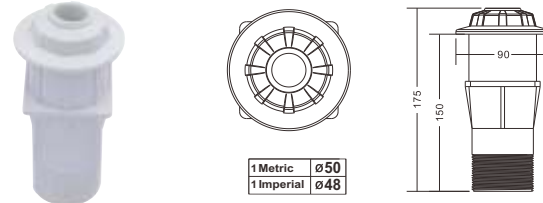


Model No 型号	Colour 颜色	Material 材料
SP2828C	White 白色	ABS+UV & PVC

Wall Inlet (For Vinyl Pool) 喷嘴(适用于胶膜池)

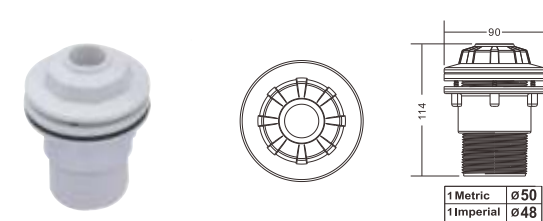


Model No 型号	Colour 颜色	Material 材料
SP2828V	White 白色	ABS+UV & PVC

Gutter Drain 溢水器

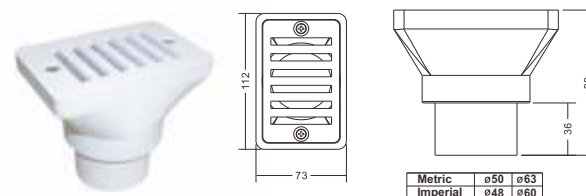


Model No 型号	Colour 颜色	Material 材料
SP2819	White 白色	ABS+UV & PVC

Wall Return 池壁回水器

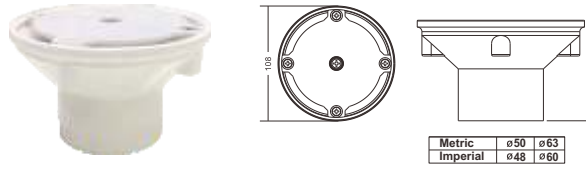

Model No 型号	Colour 颜色	Material 材料
SP2825	White 白色	ABS+UV & PVC


Cover of Suction Fitting 真空吸污配件面盖-梳格盖/密封盖

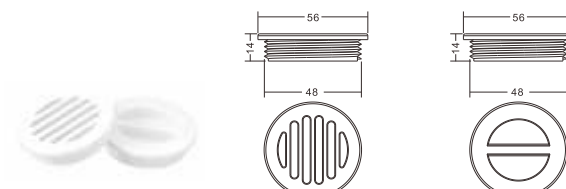

Model No 型号	Colour 颜色	Material 材料
SP1022A SP1022B	White 白色 White 白色	ABS+UV ABS+UV


泳池回水口 Pool return port

Main Drain 主排水器

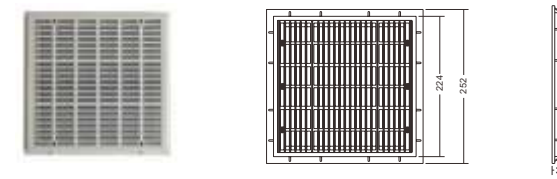

Model No 型号	Colour 颜色	Material 材料
SP1031	White 白色	ABS

Skimmer 撇渣器

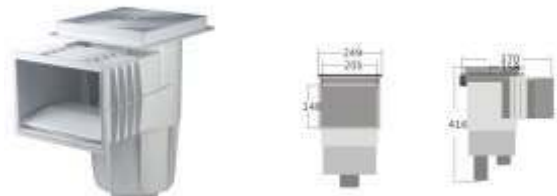

Model No 型号	Colour 颜色	Material 材料
SP0030C	White 白色	ABS+UV

Skimmer 撇渣器



Model No 型号	Colour 颜色	Material 材料
SP0040C	White 白色	ABS+UV

Main Drain (For Vinyl Pool) 主排水器(适用于胶膜池)




Model No 型号	Colour 颜色	Material 材料
SP2850V	White 白色	ABS+UV

Outlet Fitting 光面连接回水口



Model No 型号	Colour 颜色	Material 材料	Connection 接口
SP2852	White 白色	ABS+UV	2"

Main Drain 正方形安全排

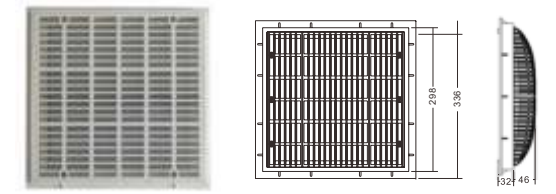

Model No 型号	Colour 颜色	Material 材料
SP1032	White 白色	ABS

Skimmer 撇渣器



Model No 型号	Colour 颜色	Material 材料
SP0030V	White 白色	ABS+UV

Skimmer 撇渣器



Model No 型号	Colour 颜色	Material 材料
SP0040V	White 白色	ABS+UV

Main Drain (For Concrete Pool) 主排水器(适用于水泥池)






Model No 型号	Colour 颜色	Material 材料
SP2850C	White 白色	ABS+UV

Outlet Fitting 外丝连接回水口






Model No 型号	Colour 颜色	Material 材料	Connection 接口
SP2851	White 白色	ABS+UV	2"thread 螺纹

清洁工具 Cleaning equipment

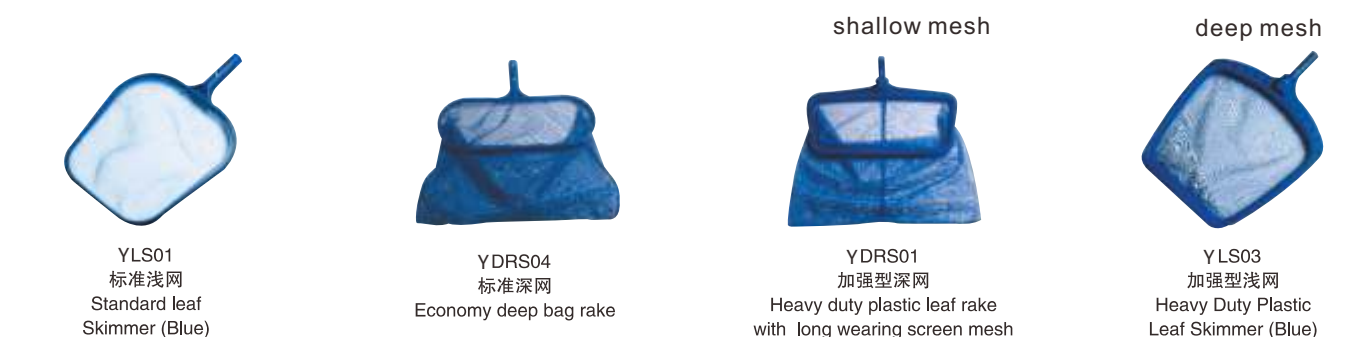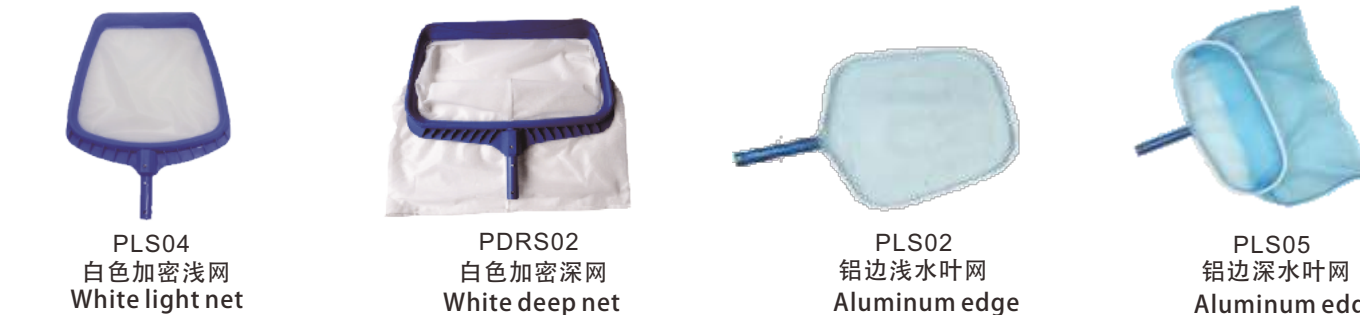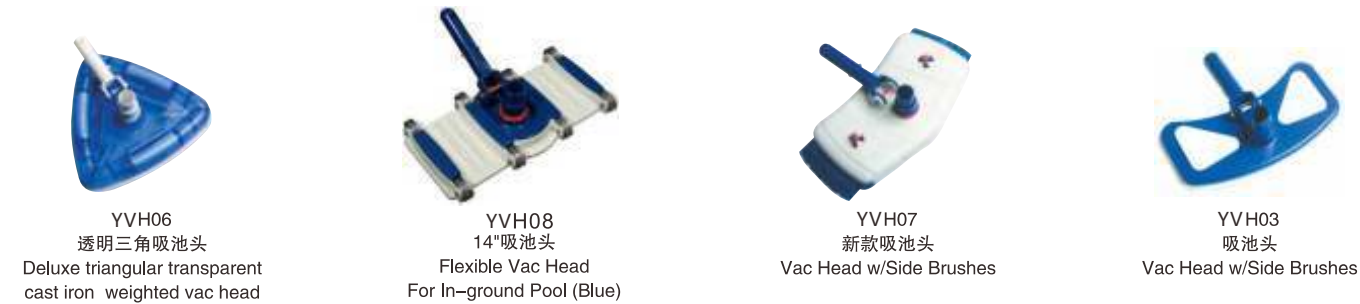

清洁工具 Cleaning equipment

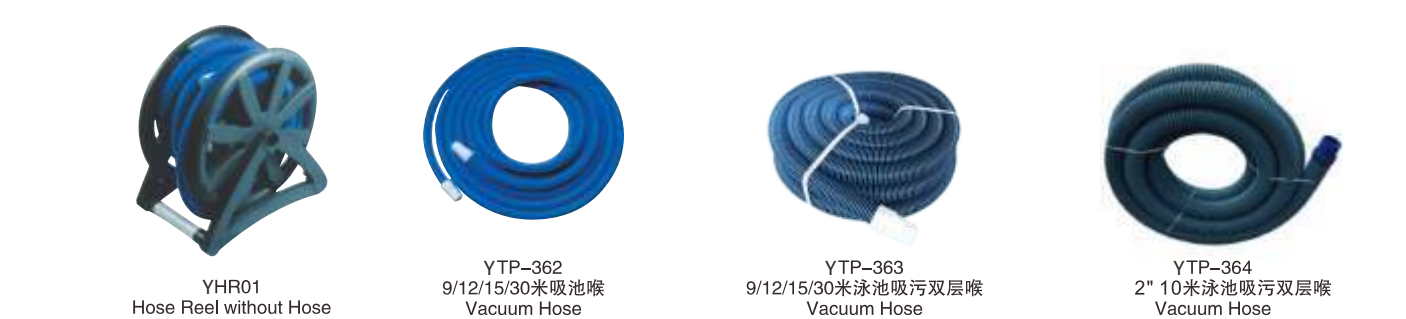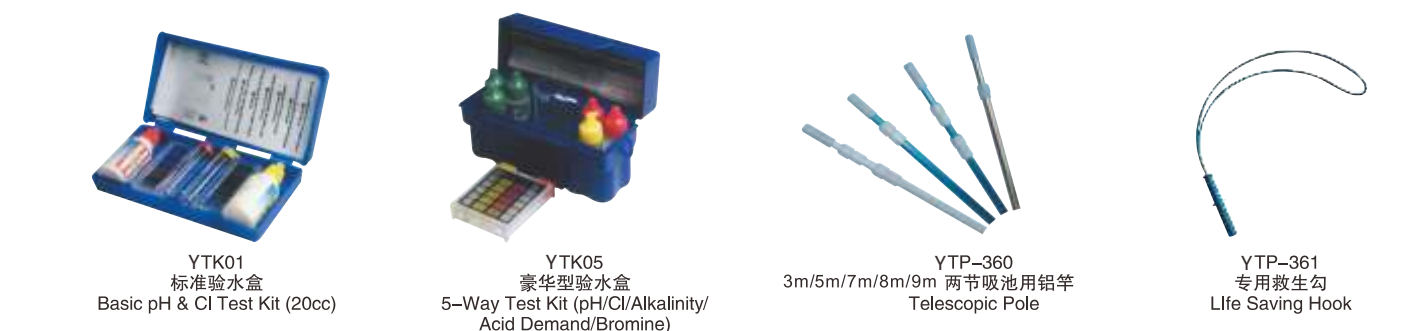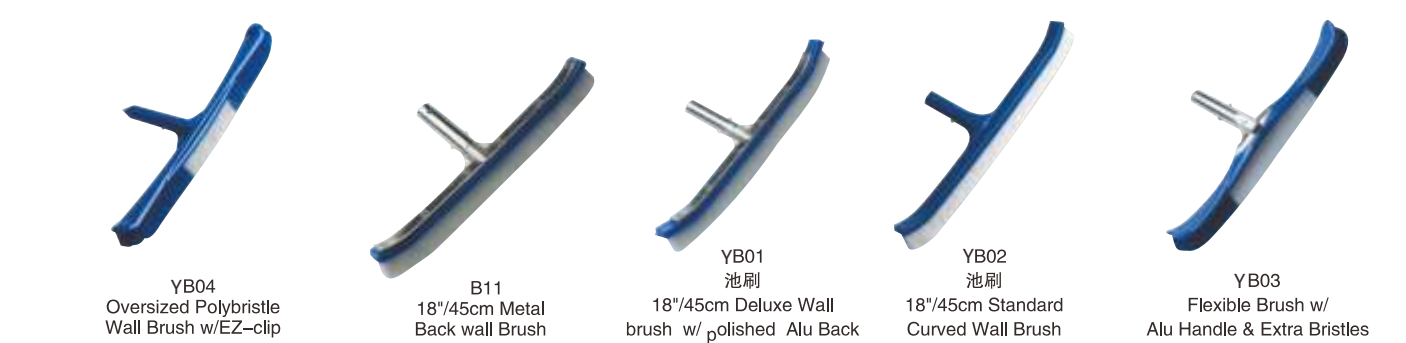

游泳按摩浴缸 Swimming jacuzzi



PARAMETER

YGL8601

Dimensions 尺寸	5870mmx2200mmx1520mm
Capacity 容量	7600L(Approx)
Seating 座位	3seats+1lounger
Dry Weight 干重	1275kg(Approx)
Filled Weight 注水重	8000kg(Approx)
Total Jets 总喷嘴数	59pcs
Equipment	
High Performance Pumps 高性能泵	2x2HP , 2x3HP
Circulation Pump 循环泵	2x0.5HP
Heater 恒温器	2x3kw
LED Light LED灯	2pc
Blower 风泵	400W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	2pcs
Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest	3pcs

PARAMETER

YGL8602

Dimensions 尺寸	5850mmx2200mmx1600mm
Capacity 容量	8500L(Approx)
Seating 座位	4 seats
Dry Weight 干重	1300kg
Filled Weight 注水重	11000kg
Total Jets 总喷嘴数	53pcs
Equipment	
High Performance Pumps 高性能泵	1x0.5HP
Circulation Pump 循环泵	1x3kw
Heater 恒温器	1pc
LED Light LED灯	400W
Blower 风泵	1pc
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pcs
Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	3pcs



YGL8601

亚克力壳体

Acrylic shell



6427 Silver white marble



6615 Summer sapphire



6696 White pearlescent



6811 Oceanwave



6878 Midnight



6256 Mayan copper



6240 Mediterranean sunset



9814 Gypsum



YGL8602

裙边颜色

Synthetic cabinet colors



Teak color



Red Brown



Grey



Coffee

工程案例



按摩浴缸系列 SPA sreies



PARAMETER YG8805

Dimensions 尺寸	2180mmx1600mmx880mm
Capacity 容量	1100L
Seating 座位	2seats+1lounger
Dry Weight 干重	280kg
Filled Weight 注水重	1380kg
Total Jets 总喷嘴数	34pcs

Equipment	
High Performance Pumps 高性能泵	1x3HP
Circulation Pump 循环泵	1x0.5HP
Heater 恒温器	1x3kw
LED Light LED灯	1pc
Blower 风泵	300W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc



Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	3pcs
Fiberglass Base Tray 底盘	1pc



PARAMETER YG8806

Dimensions 尺寸	2180mmx1950mmx880mm
Capacity 容量	1480L
Seating 座位	4seats
Dry Weight 干重	380kg
Filled Weight 注水重	1950kg
Total Jets 总喷嘴数	50pcs

Equipment	
High Performance Pumps 高性能泵	2x2HP
Circulation Pump 循环泵	1x0.5HP
Heater 恒温器	1x3kw
LED Light LED灯	1pc
Blower 风泵	400W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc



Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	2pcs
Fiberglass Base Tray 底盘	1pc



PARAMETER YG8807

Dimensions 尺寸	2130mmx2130mmx880mm
Capacity 容量	1480L
Seating 座位	3seats+1lounger
Dry Weight 干重	350kg
Filled Weight 注水重	1950kg
Total Jets 总喷嘴数	55pcs

Equipment	
High Performance Pumps 高性能泵	2x3HP
Circulation Pump 循环泵	1x0.5HP
Heater 恒温器	1x3kw
LED Light LED灯	1pc
Blower 风泵	400W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc



Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	1pc
Fiberglass Base Tray 底盘	1pc



PARAMETER YG8808

Dimensions 尺寸	2130mmx2130mmx880mm
Capacity 容量	1500L
Seating 座位	8seats
Dry Weight 干重	380kg
Filled Weight 注水重	1900kg
Total Jets 总喷嘴数	77pcs

Equipment	
High Performance Pumps 高性能泵	2x3HP
Circulation Pump 循环泵	1x0.5HP
Heater 恒温器	1x3kw
LED Light LED灯	1pc
Blower 风泵	400W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc

Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	3pc
Fiberglass Base Tray 底盘	1pc

按摩浴缸系列 SPA sreies



PARAMETER YG8010

Dimensions 尺寸	2200mmx2200mmx940mm
Capacity 容量	1400L
Seating 座位	6seats
Dry Weight 干重	380kg
Filled Weight 注水重	1780kg
Total Jets 总喷嘴数	44pcs

Equipment	
High Performance Pumps 高性能泵	2x2HP
Circulation Pump 循环泵	1x0.5HP
Heater 恒温器	1x3kw
LED Light LED灯	1pc
Blower 风泵	300W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc



Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	4pcs
Fiberglass Base Tray 底盘	1pc



PARAMETER YG8003

Dimensions 尺寸	2350mmx2350mmx950mm
Capacity 容量	1700L
Seating 座位	3seats+2lounger
Dry Weight 干重	400kg
Filled Weight 注水重	2200kg
Total Jets 总喷嘴数	59pcs

Equipment	
High Performance Pumps 高性能泵	2x3HP
Circulation Pump 循环泵	1x0.5HP
Heater 恒温器	1x3kw
LED Light LED灯	1pc
Blower 风泵	400W
Aromatherapy 香薰	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc



Synthetic Cabinet 塑木裙边	1pc
Drain 排水口	1pc
Filtration 过滤器	1pc
High Density Foam Insulation 保温层	1pc
Headrest 枕头	3pcs
Fiberglass Base Tray 底盘	1pc



PARAMETER YG8005A

Dimensions 尺寸	2100mmx1050mmx760mm
Capacity 容量	600L
Seating 座位	2seats
Dry Weight 干重	180kg
Filled Weight 注水重	780kg
Total Jets 总喷嘴数	23pcs

Equipment	
High Performance Pumps 高性能泵	1x2HP 2speed
Heater 恒温器	1x2kw
LED Light LED灯	1pc
Ozone 臭氧	1pc
Controller 控制器	1pc
Synthetic Cabinet 塑木裙边	1pc




Drain 排水口	1pc
Filtration 过滤器	1pc
Headrest 枕头	2pcs
Fiberglass Base Tray 底盘	1pc

空气源热泵 Air source heat pump

产品展示(Product display)



工作模式图(Work pattern diagram)

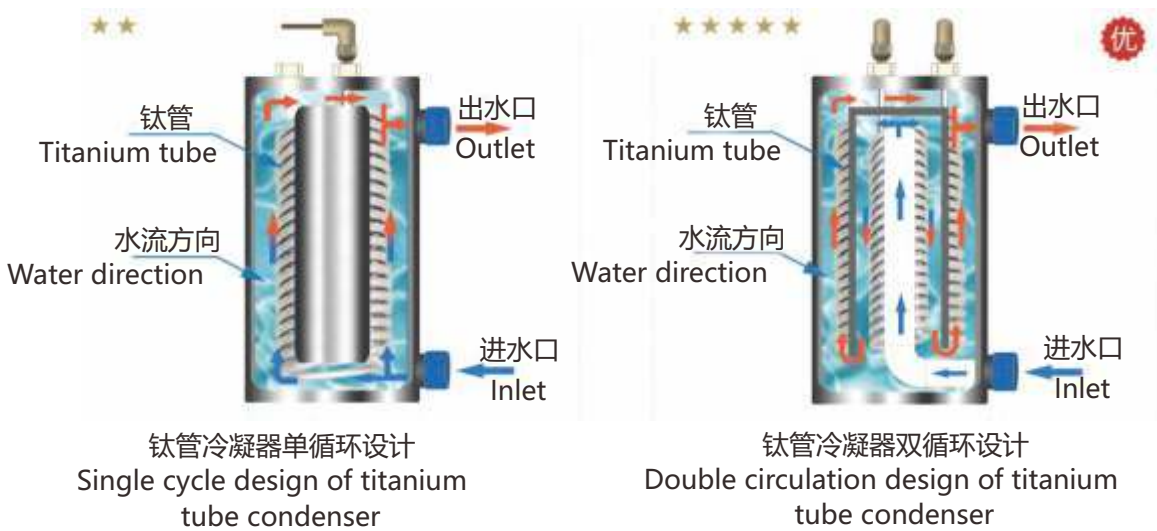

参数表 Technical Characteristics										
型号 Model	YS20RS	YS30RS	YS40RS	YS50RS	YS100RS	YS100RS	YS150RS	YS200RS	YS300RS	YS350RS
制热量 (KW) Heating capacity	7	12	15	18.6	21	36.8	42	72	83	108
产水量(L/h) Water rate	160	280	350	420	500	800	1000	1600	2000	2200
额定功率 (KW) Rated power	1.84	2.98	3.78	4.6	5.2	9.2	11	19	21	26.3
电流(A) Current	8	13/6	15	9	12	18	24	35	40	52
额定出水温度(°C) Rated outlet temperature	55	55	55	55	55	55	55	55	55	55
最高出水温度 (°C)Maximum outlet temperature	60	60	60	60	60	60	60	60	60	60
电压 (V)/频率(Hz) Voltage/frequency	220/50	220/380/50	220/50	380/50	380/50	380V/50	380V/50	380V/50	380/50	380/50
噪音(Db) Noise	40	45	55	55	55	60	60	70	70	70
机组尺寸(mm) (W*D*H) _Unit size	1140 * 360 * 550	1120*490*710	1120*490*1260	1120*490*1260	1120*490*1260	1450*760*1060	1140 * 360 * 550	1140 * 360 * 550	2040*1100*2000	1140 * 360 * 550
包装尺寸(mm) (W*D*H) Packing size	1200 * 400 * 700	1190*520*865	1200*520*1425	1200*520*1425	1200*520*1425	1500*800*1200	1200 * 400 * 700	1200 * 400 * 700	2080*1150*2130	1200 * 400 * 700
净重(kg) The net weight	75	100	142	152	172	310	340	600	670	700
冷媒Refrigerant	R22	R22	R22	R22	R22	R22	R22	R22	R22	R22
工作环境温度 Operating environment temperature	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃	(-15℃)— 45℃
压缩机 Compressor	松下	谷轮	谷轮	谷轮	谷轮	谷轮	谷轮	谷轮	谷轮	谷轮
水流量(L/h)Water flow	2000L/h	3600L/h	5000L/h	5500L/h	6000L/h	11000L/h	12000	20000L/h	28000	32000
接口尺寸 (DN)The interface size	25	25	25	25	25	32	32	50外牙	50外牙	75

空气源泳池恒温机 Air-powered pool thermostat



YPM-10/18

空气源迷你热泵

Air Source Mini Heat pump



YPS-30/70

空气源定频热泵

Air source constant frequency heat pump



YPS-120

空气源定频热泵

Air source constant frequency heat pump

空气源变频泳池恒温机 Air source variable frequency pool thermostat



YPS-30/85

空气源变频热泵

Air source variable frequency heat pump



YPS-120

空气源变频热泵

Air source variable frequency heat pump



YPC-50/120

泳池机连接器

Pool machine connector



YPSi-50/120

空气源变频热泵

Air source variable frequency heat pump



YPV-180/220

空气源变频热泵

Air source variable frequency heat pump



YVP-450

空气源变频热泵

Air source variable frequency heat pump

“高仕”恒温器 Water Heater



VTP-00
“高仕”恒温器 "Coates" water heater
5.5-60kw/220V/380V



VTP-006
“高仕”恒温器 "Coates" water heater
5.5-60kw/220V/380V

参数表 Technical Characteristics				
型号 Item No.	功率 Power (KW)	进/出水管径 Inlet/Outlet (inch)	电压 Voltage (V)	包装尺寸 Package(mm) L x W x H
H-55	5.5	1.5	220/380	500x385x130
H-75	7.5	1.5	220/380	500x385x130
H-110	11	1.5	220/380	500x385x130
H-150	15	1.5	220/380	500x385x130
H-180	18	1.5	380	500x385x130
H-240	24	2	380	705x390x405
H-320	32	2	380	705x390x405
H-360	36	2	380	705x390x405
H-450	45	2	380	730x400x530
H-600	60	2	380	730x400x530

参数表 Technical Characteristics				
型号 Item No.	功率 Power (KW)	进/出水管径 Inlet/Outlet (inch)	电压 Voltage (V)	包装尺寸 Package(mm) L x W x H
HS-55	5.5	1.5	220/380	500x385x130
HS-75	7.5	1.5	220/380	500x385x130
HS-110	11	1.5	220/380	500x385x130
HS-150	15	1.5	220/380	500x385x130
HS-180	18	1.5	380	500x385x130
HS-240	24	2	380	705x390x405
HS-320	32	2	380	705x390x405
HS-360	36	2	380	705x390x405
HS-450	45	2	380	730x400x530
HS-600	60	2	380	730x400x530

“TTT”交换器 “TTT”Exchangers



瑞典PAHLEN “三T” 高效节能交换器 MF400 MF260 MF200 MF135 MF80

使用高质量防腐蚀不锈钢制造，独特的管道散热设计，保证了最大的热交换量，根据不同的需要可以选择不同的规格，安装简易。

Heat Exchanges are highly engineered for fast heating, high capacity and easy use. High capacity, multi-tubuar heat exchange. Primary inlet water circuit (heating agent). High efficiency, low energy consumption.



参数表 Technical Characteristics						
型号 Model	功率 Power (KW)	热水流量 Heat Water Flow (l/min)	冷水流量 Cold Water Flow (l/min)	表面热传递 Heat Transference SFT (m ²)	长度 Length (mm)	泳池体积 Volume (m ³)
MF80	24	20	150	2.0 0.10	310	<30
MF135	40	25	200	3.2 0.30	390	30-60
MF200	60	30	250	4.6 0.45	590	60-75
MF260	75	35	300	6.4 0.60	590	75-115
MF400	120	50	360	12 1.10	1090	115-175

桑拿房 Sauna room



四人组合房
Size:1300x1300x2100mm




Size:1200x1000x2080mm



Size:1500x1500x2100mm



YS-3647
全玻璃干蒸门
1860x780mm

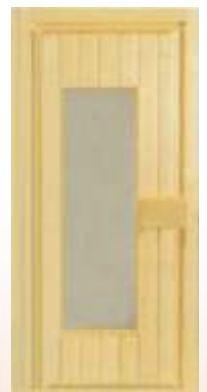

YS-3650
桑拿木门
1800x650/600mm



SAV桑拿炉 SAV Sauna Heater



SAV炉(6条发热丝)



SAV炉(9条发热丝)



SAV炉(12条发热丝)



安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SAV-105		10.5KW	9-15	
SAV-120		12.0KW	10-18	
SAV-150		15.0KW	14-24	
SAV-180		18.0KW	15-27	

安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SAV-180		18.0KW	15-27	
SAV-210		21.0KW	19-31	
SAV-240		24.0KW	24-38	
SAV-270		27.0KW	30-46	

安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SAV-240		24.0KW	24-38	
SAV-270		27.0KW	30-46	
SAV-300		30.0KW	37-53	
SAV-330		33.0KW	44-60	
SAV-360		36.0KW	50-70	

SAV桑拿炉 SAV Sauna Heater



SCA外控式桑拿炉(喷涂)



SCA内控式桑拿炉(喷涂)



SCA外控式桑拿炉(不锈钢型)



SCA内控式桑拿炉(不锈钢型)

安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SCA-30W		3.0KW	2-4	
SCA-45W		4.5KW	3-6	
SCA-60W		6.0KW	5-9	
SCA-80W		8.0KW	8-12	
SCA-90W		9.0KW	9-13	

安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SCA-30NS		3.0KW	2-4	
SCA-45NS		4.5KW	3-6	
SCA-60NS		6.0KW	5-9	
SCA-80NS		8.0KW	8-12	
SCA-90NS		9.0KW	9-13	

安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SCA-30B		3.0KW	2-4	
SCA-45B		4.5KW	3-6	
SCA-60B		6.0KW	5-9	
SCA-80B		8.0KW	8-12	
SCA-90B		9.0KW	9-13	

安装尺寸 Installation dimension		技术参数 Technical parameters		
型号 Model		功率 Power	适用空间 Applicable space (M²)	
SCA-30BS		3.0KW	2-4	
SCA-45BS		4.5KW	3-6	
SCA-60BS		6.0KW	5-9	
SCA-80BS		8.0KW	8-12	
SCA-90BS		9.0KW	9-13	

“哈维雅”桑拿炉 “HARVIA”Sauna Heater



QSL-30807



QSL-30808

QSL-30809



桑拿炉控制器
CH90, CH150
3.0kw-1.5kw

型号	功率 KW	桑拿房面积 最小值-最大值 m²	桑拿炉尺寸 长x宽x高(mm) BCE型号长270毫米	石重 kg	400V 2N~ 电缆平方数值 mm²	保险丝 A	230V 1N~ 电缆平方数值 mm²	保险丝 A
YSN-30807	2.3	1.3-2.5	295 x 280 x 505	12	4 x 1.5	2 x 10	3 x 1.5	1 x 10
YSN-30807	3.0	1.6-3.8	295 x 280 x 505	12	4 x 1.5	2 x 10	3 x 2.5	1 x 16
YSN-30807	3.5	2-4.5	295 x 280 x 505	12	4 x 1.5	2 x 10	3 x 2.5	1 x 16
YSN-30808	4.5	3-6	480 x 310 x 540	25	5 x 1.5	3 x 10		
YSN-30808	6.0	5-8	480 x 310 x 540	25	5 x 1.5	3 x 10		
YSN-30808	8.0	7-12	480 x 310 x 540	25	5 x 2.5	3 x 16		
YSN-30808	9.0	8-14	480 x 310 x 540	25	5 x 2.5	3 x 16		
YSN-30809	10.5	9-15	470 x 435 x 640	40-50	5 x 2.5	3 x 16		
YSN-30809	13.5	11-20	470 x 435 x 640	40-50	5 x 4.0	3 x 20		
YSN-30809	16.5	16-30	470 x 435 x 640	40-50	5 x 6.0	3 x 25		

芬兰“西活”桑拿炉 Finland “SAWO”Sauna Heater



YSN-30810
不锈钢内控炉
Savonia
3.0kw
4.5kw
6.0kw
220v-380v
(421)513x288x514



YSN-30811
不锈钢内控炉
Savonia
6.0kw Profesional
8.0kw
9.0kw
220v-380v
(421)513x288x514



YSN-30812
不锈钢内控炉
Savonia
Built-In Control
9.0kw/10.5kw

YSN-30813
不锈钢外控炉
Savonia
9.0kw/10.5kw/
12.0kw
380v
442x410x650

YSN-30815
不锈钢外控炉
Savonia
15.0kw/18.0kw/
380v
587x410x650

YSN-30816
不锈钢外控炉
Savonia V12
18.0kw/21.0kw/
24.0kw
38V
741x410x650



YSN-30817
不锈钢内控炉
Mini
2.3kw
3.0kw
3.6kw
220V
(340)432x208x445mm



接驳箱



接驳箱



数显外控器



外控器

瑞典“帝梦”桑拿炉 Sweden “TYLO”Sauna Heater



TY-3343
内控炉
SE2/SE45
2kw-4.5kw/220V
310x170x400mm



TY-3345
内控炉
SE6/SE8
6.6kw/380V
8kw/380V
455x315x435mm



TY-3346
外控炉
SK 6 / SK 8
6.6kw/380V
8kw/380V
455x315x435mm



TY-3347
外控炉
10.7kw/380V
16kw/380V
20kw/380V
650x395x570mm



YS-5501
香柏木桶浴 1200x620x700mm



YS-5502 香柏木桶浴
1400x700x620mm/1600x700x620mm



YS-5503
杉木桶浴 1200x690x750mm



YS-5505
香柏木蒸气沐足桶 Φ420x620mm



YS-5506
沐足盆 240x400mm



YS-5507
亚克力沐足盆 500x400x500mm



YS-5508
亚克力沐足盆 470x370x380mm



Y-20017 桑拿灯
Sauna Lamp



Y-20018 桑拿灯
Sauna Lamp



Y-20019 桑拿灯
Sauna Lamp



Y-20020 桑拿灯
Sauna Lamp




SCA-1000W



SCA-1500W



SCA-2000W



SCA-2670W



SCA-3000W



Y-20025 木质热情温度计
Wooden Hot Thermometer




Y-20024 木质玻璃温度计
Cabin Glass Thermometer



Y-20027 不锈钢温湿度计
Stainless Steel Thermo-Hygrometer



Y-20028 金属温湿度计
Metallic Thermo-Hygrometer



SAV-1500W



SAV-2000W



SAV-2500W



SAV-3000W



Y-20029 木质单温度计
Wooden Hygrometer



Y-20030 木质双表温湿度计
Wooden Thermo-Hygrometer



-20005 计时沙钟
Sand Timer



Y-20006 计时沙钟
Sand Timer



SAA-2000W



SAWO-2000W



SAWO-2700W



SAWO-3000W



Y-20037 木质温湿双表(月形)
Wooden temperature moisture meter(two meters)



Y-20016 木桶胶内胆
Bucket Inset



Y-20002 木桶木勺
Bucket and Spoon




Y-20004 工艺型木桶木勺
Handicraft Type Bucket and Spoon




SAWO/SA-1500W



SAWO/SA-2000W




TY-2000 帝梦炉丝



HA-2500 哈丽雅炉丝



Y-20009 木质灯罩
Wooden Lamp Shade



Y-20008 出入口风口
Sauna Room Vent



Y-20012 桑拿拉手
Sauna Door Handle



Y-20038 桑拿门大拉手
Handle(big size)



Y-20037 桑拿房自动喷淋控制器



Y-20038 喷水感应面板



Y-20039 喷水开关



Y-20040 不锈钢花洒头



Y-20041 塑料壳体低压电控阀



Y-20031 桑拿木钟
Sauna Wooden Clock



Y-20034 峰窝火山石
Sauna Stone



Y-20035 桑拿石
Sauna Stone



Y-20036 桑拿石
Sauna Stone



Y-20042 桑拿洒水开关




Y-20043 铁杉木
Hemlock wood



Y-20045 云杉木
Spruce wood



Y-20046 香柏木
Cedar wood



Y-20047 阿巴奇木
Abachi wood

干湿蒸房 Dry & wet steam room series



光波浴

它是根据远红外线对人体生长健康的重要特征研制而成，是一种综合日光浴与桑拿浴的优点为一体的新型沐浴设备，采用优质原木、箱体设计，并配有音响系统，在沐浴的同时享受轻松的音乐。光波能量场以5.6~15微米的远红外线为主的能量被人体吸收，深入皮肤40mm，与人体深层细胞产生共振，活化细胞，使细胞足氧呼吸，加速体内新陈代谢，加速血液循环，增强组织再生能力。



木炭房

木炭对肝病、腰痛、肋骨痛有很好的理疗效果，对皮肤病有辅助疗效，可排除体内有毒元素，恢复皮肤弹性，使人精力旺盛。碳产生的阴离子在桑拿时很自然的渗透到人体内，同时对失眠症也有显著疗效。现代人因有害电子波，使身体变为酸性，通过阴离子可以调整过来。对恢复疲劳、神经痛、关节痛、交通事故后遗症有特效。



冰蒸浴

置身于挂满真冰的房间，寒冷的气温使毛细血管收缩，刺激神经，恢复精力，可促进人体皮肤的微循环，提高免疫力，起到强身健体的功效，与热水浴交替使用效果更好。



盐雾浴

由设在房顶的气雾喷头喷出水雾，形成一片烟雨朦胧的世界，造成人体视觉及感官上愉悦感，人置身其中，就好像进入了人间仙境，可以忘却烦恼，舒缓工作及生活带来的压力，反璞归真。在很早以前，欧洲水手们，由于长期暴露在阳光下，皮肤容易破裂及老化，但由于海盐的清洁和治疗作用使得他们的皮肤依然能保持最佳状态。同时在水雾中含有适量海盐，可消除疲劳，达到爽洁肌肤的功效。



玉石房



盐蒸房



汗蒸房



土耳其浴



玛瑙房


干湿蒸房 Dry & wet steam room series

YS-5511 Size: 1800x1200x2280mm




配置:	Configuration :
桑拿浴	Sauna
蒸汽浴	Steam bath
收音机	Radio
外接CD	CD connection
电话接听	Telephone
温度显示/调节	Temperature indication/adjustment
时间显示/调节	Time indication/adjustment
排气扇	Exhaust fan
照明灯	Illuminating lamp
背部针刺按摩	Back acupuncture massage
顶部花洒	Top shower
活动花洒	Movable shower
臭氧	Ozone disinfection
功能转换	Functional changeover
电子防漏保护	Electric leakage protection
脚部按摩	Foot massage

YS-5512 Size: 1600x1100x2280mm

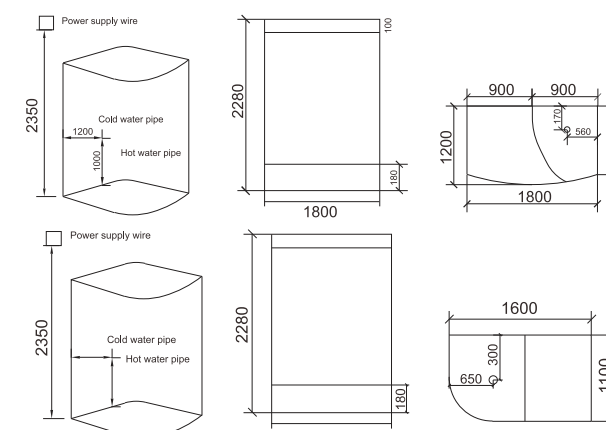


湿蒸房系列 Wet steam room series

蒸汽系列		
型号	炉	尺寸 长 x 宽 x 高 (mm)
6A	9kw	2500x1800x2250
8A	12kw	3100x1800x2250
10A	12kw	3700x1800x2250
12A	18kw	4300x1800x2250
14A	18kw	4900x1800x2250
16A	18kw	5500x1800x2250
18A	24kw	6100x1800x2250
20A	24kw	6700x1800x2250
2B1	3-4kw	1050x1120x2150
2B2	3-4kw	1300x1100x2150
2B3	3-4kw	1300x1200x2150
4B	6kw	1800x1300x2250
6B	9kw	1800x1900x2250
8B	9kw	1800x2500x2250
10B	12kw	1800x3100x2250
12B	12kw	1800x3700x2250
14B	18kw	1800x4300x2250
16B	18kw	1800x4900x2250
18B	18kw	1800x5500x2250
20B	24kw	1800x6100x2250
10C	9kw	2540x2120x2250
12C	9kw	3140x2120x2250
14C	12kw	3740x2120x2250
16C	12kw	4340x2120x2250
18C	18kw	4940x2120x2250
20C	18kw	5540x2120x2250
4D	4kw	2120x1340x2250
6D	5kw	2120x1340x2250
7D	6kw	2120x1940x2250
8D	8kw	2120x1940x2250
9D	8kw	2120x2540x2250
10D	9kw	2120x2540x2250
12D	9kw	2120x3140x2250
14D	12kw	2120x3740x2250
16D	12kw	2120x4340x2250
18D	18kw	2120x4940x2250
20D	18kw	2120x5540x2250
12E	12kw	2540x3140x2250
14E	12kw	3140x3140x2250
16E	18kw	3740x3140x2250
18E	24kw	4340x3140x2250
20E	24kw	4940x3140x2250
7F	9kw	3140x1340x2250
10F	9kw	3140x1940x2250
12F	12kw	3140x2540x2250
14F	18kw	3140x3140x2250
16F	24kw	3140x3740x2250
18F	24kw	3140x4340x2250
20F	24kw	3140x4940x2250
2G	3-4kw	1180x1160x2200
2G	3-4kw	1340x1270x2200

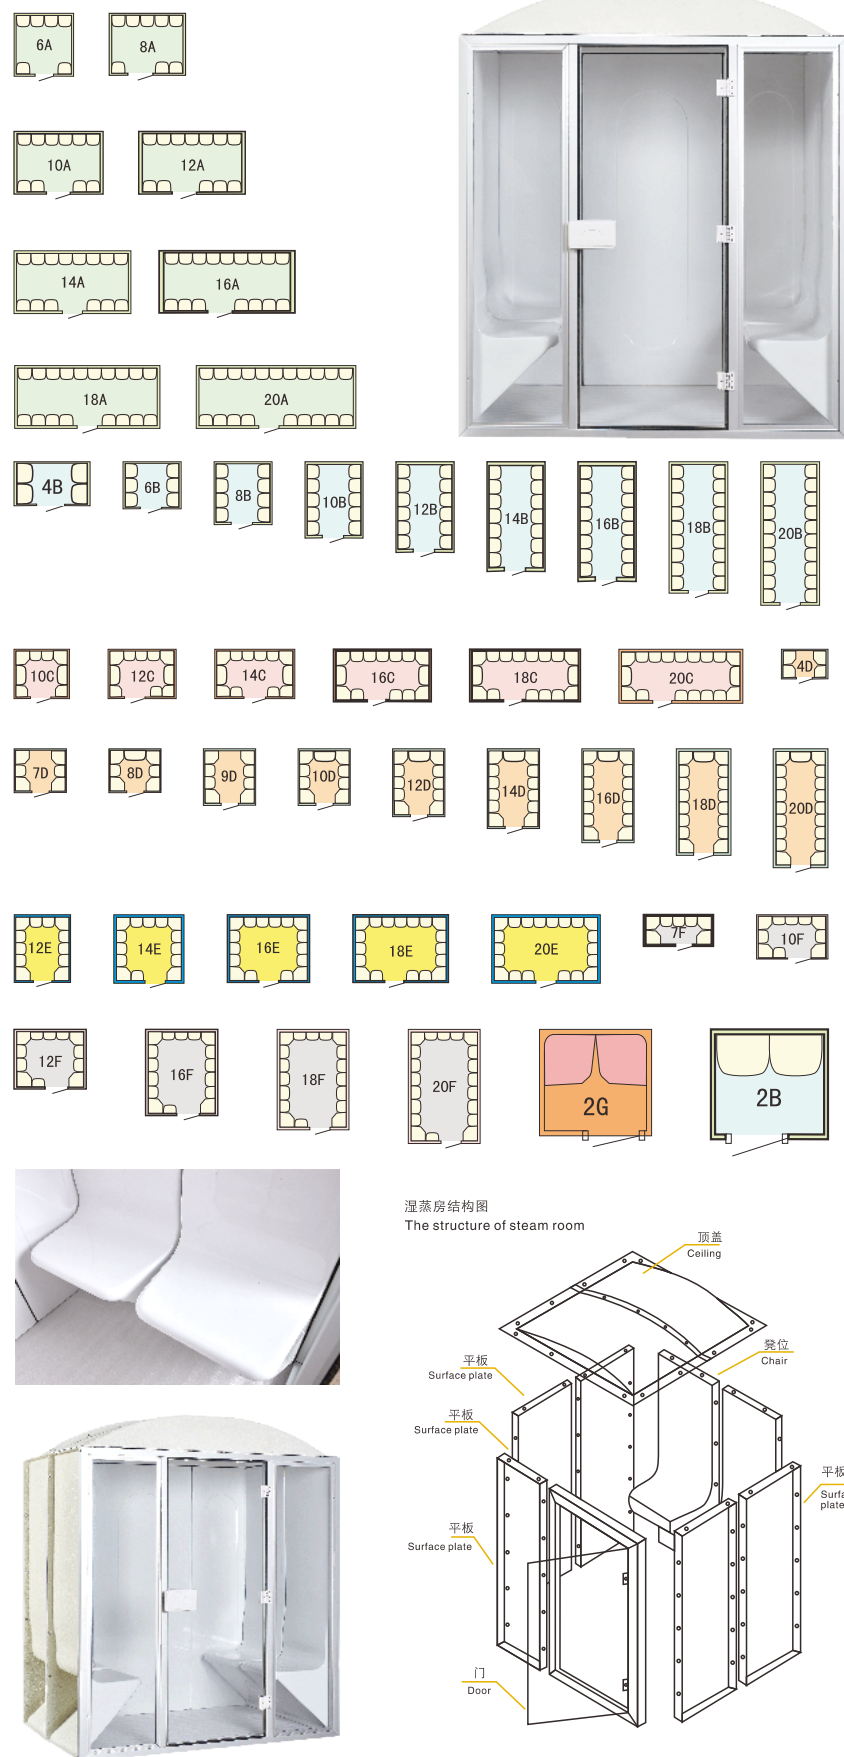

湿蒸房系列 Wet steam room series

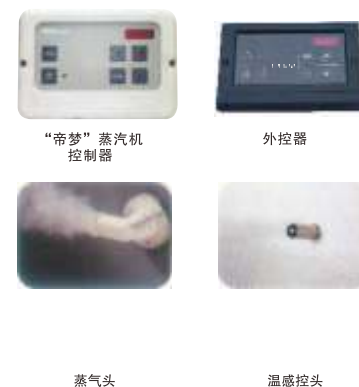

Steam generator model	Output kw	Lightweight wall of galass, plastic, Elysee/Excellent room etc.		Heavy wall of tiles, concrete, stone etc.,		Steam production kg/h	Steam generator dimensions LxWxH
		with ventilation	without ventilation	with ventilation	without ventilation		
YS-3323	2.2		Max*2.5	Max*2.5	Max*1.5	3	
YS-3323	4.5	Max*4	Max*5.5		Max*3.5	5.5	445x130x405
YS-3323	6.6	3.8	4-15	2-5	2.5-8	8	445x130x405
YS-3325	9	6-16	13-24	4-10	7-16	12	570x224x485
YS-3325	12	14-22	22-30	8-15	14-20	16	570x224x485



型号	输出功率 (kW)	建议房间尺寸(m³)						蒸汽 输出量 公斤/小时	230V 1N~		400V 3N~	
		薄墙壁 (如塑料, 等……)		瓷砖薄墙		石瓦砖墙, 等……			电缆 mm²	保险丝 A	电缆 mm²	保险丝 A
		有通风设备	无通风设备	有通风设备	无通风设备	有通风设备	无通风设备					
YS-3326	4.5	2.0–5.0	2.0–7.0	2.0–4.0	2.0–6.0	2.0–3.5	2.0–4.5	5.5	3 × 6	25	5 × 1.5	3 × 10
YS-3326	5.7	2.5–8.0	3.5–11.0	2.0–6.0	3.0–9.0	2.0–5.0	2.0–7.5	7.6	3 × 6	25	5 × 1.5	3 × 10
YS-3326	9.0	6.0–12.0	9.0–17.0	4.5–10.0	7.5–14.0	3.0–8.0	6.0–11.5	12	–	–	5 × 2.5	3 × 16
YS-3326	10.8	10.0–14.5	15.0–21.0	8.0–12.0	12.0–17.0	6.0–10.0	10.0–14.0	14.6	–	–	5 × 2.5	3 × 16

波光跳泉 Wave light jumping spring




YM-800/1000/1200/1500



产品的尺寸规格可根据客户的需求订做




YM-2000/2500/3000



产品的尺寸规格可根据客户的需求订做

波光跳泉 Beam Wave Fountain

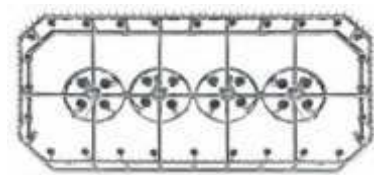

YM-2000x4000



产品的尺寸规格可根据客户的需求订做



Y-0331



Y-0330

喷头系列 Sprinkler series



Y-88816



Y-88808



Y-88815



Y-88805




音乐喷泉 Musical fountain

YQ-6615-1000/1200/1500

喷泉分为四组
可单一组喷射
亦可多组喷射

Fountain is divided into four groups
Single group can spray
Can be multiple injection

型号 Model	1000	1200	1500
电压 Voltage	AC220/110V	AC220/110V	AC220/110V
频率 Frequency	50/60HZ	50/60HZ	50/60HZ
功率 Power	750w	1100w	1500w
喷射高度 Height	2m	2.5m	3m
覆盖直径 Damerer	1.4m	1.6m	1.8m
外型尺寸 Curcle	1000x1000x380mm	1200x1200x380mm	1500x1500x380mm
重量 Weight	50kg	65kg	80kg

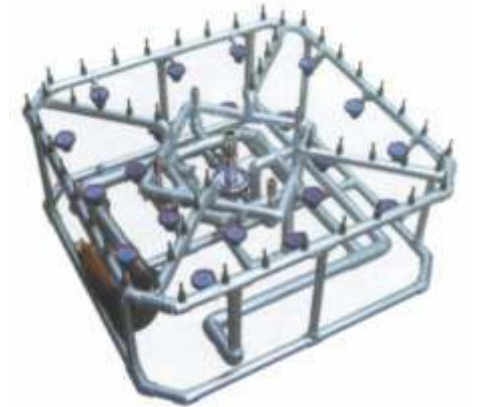

YQ-6615-1000/1200/1500



音乐控制器



YQ-6616-1000/1200/1500

可搭配木桩木盆 Matching wooden stake washbasins

型号 Model	1000	1200	1500
电压 Voltage	AC220/110V	AC220/110V	AC220/110V
频率 Frequency	50/60HZ	50/60HZ	50/60HZ
功率 Power	550w	750w	1500w
喷射高度 Height	2m	2.5m	3m
覆盖直径 Damerer	1.3m	1.5m	1.7m
外型尺寸 Curcle	Φ 1000x380mm	Φ 1200x380mm	Φ 1500x380mm
重量 Weight	48kg	58kg	75kg




音乐控制器

YQ-6616-1000/1200/1500



喷头系列 Nozzle

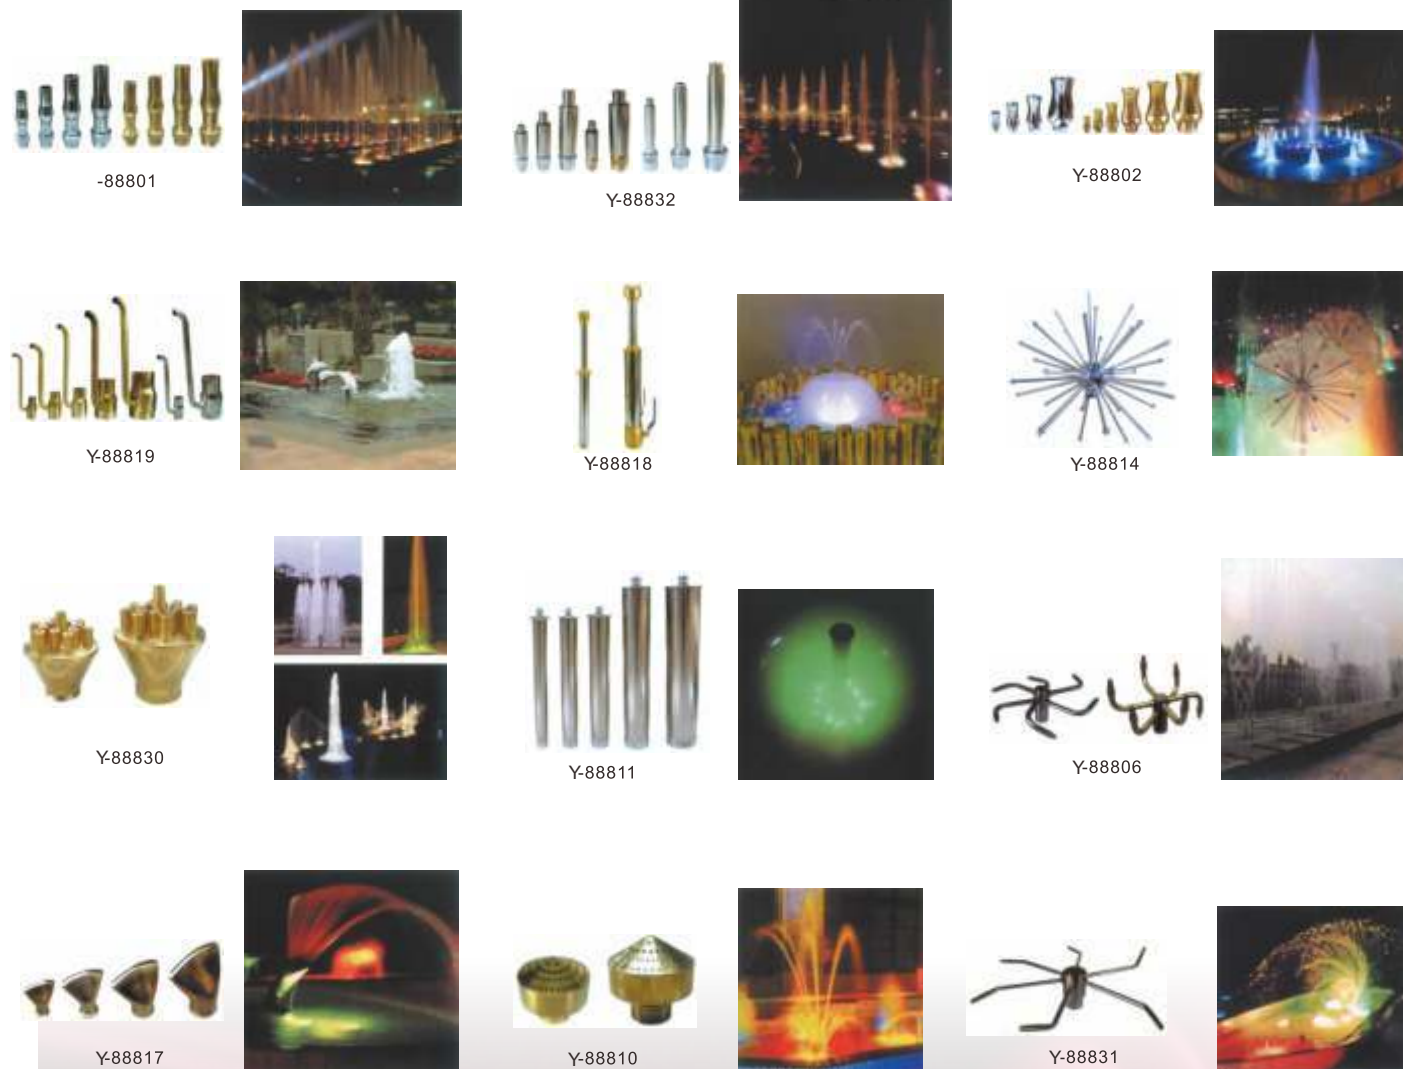

雾化小喷泉 Atomizer Fountain



Q-6610

- 电压 Voltage: AC220/110V
- 频率 Frequency: 50/60HZ
- 功率 Power: 205w
- 喷射高度 Height: 0.1~0.5m
- 覆盖直径 Damerer: 0.2~1.0m
- 雾化量 Spray volume: 1000ml/h
- 重量 Weight: 5.38kg

YQ-6611

- 电压 Voltage: AC220/110V
- 频率 Frequency: 50/60HZ
- 功率 Power: 225w
- 喷射高度 Height: 0.1~0.6m
- 覆盖直径 Damerer: 0.2~1.3m
- 雾化量 Spray volume: 1000ml/h
- 重量 Weight: 5.47kg


YQ-6612

- 电压 Voltage: AC220/110V
- 频率 Frequency: 50/60HZ
- 功率 Power: 240w
- 喷射高度 Height: 0.15~0.7m
- 覆盖直径 Damerer: 0.2~1.6m
- 雾化量 Spray volume: 1000ml/h
- 重量 Weight: 5.66kg

多功能音乐喷泉 Multifunctional Music fountain

配音乐喷泉控制箱 Music fountain control

- 控制水泵功能 Control pump function
- 单组变换功能 Single conversion function
- 程控模式功能 Programmable mode function
- 音乐控制模式 Music control mode
- DVD播放功能 DVD playback
- 音频输出功能 Audio output capability
- DVD遥控器控制 DVD remote control

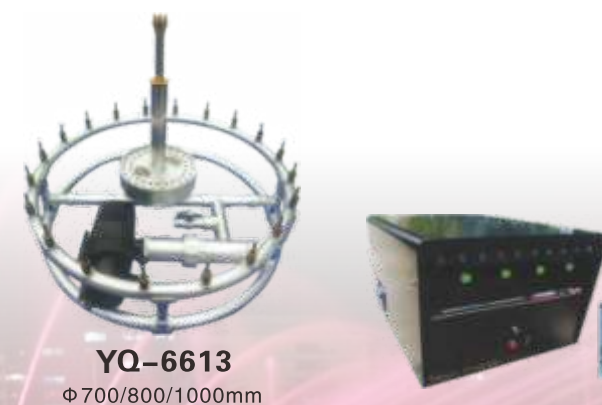

YQ-6613
Φ 700/800/1000mm



遮阳伞系列 Sunshade series



TYS-0010B
450X450X460m



户外沙滩椅系列 Outdoor beach chair series



ART 1040



ART G5227



ART G3050



ART G3051



ART 1107



ART 1108



ART 1109



ART 1110



ART 1111



ART 1112



ART 1113



ART 1114



ART 1244

