



HR380SG

HR1180SG

HR1680SG
HR1860SG

HR2460SG

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR380SG	2-8℃	620	2100	680	5	400	220v50hz	R290	285
HR1180SG	2-8℃	1260	2100	680	5	1200	220v50hz	R290	490
HR1680SG	2-8℃	1680	2100	680	5	1600	220v50hz	R290	565
HR1860SG	2-8℃	1860	2100	680	5	1800	220v50hz	R290	565
HR2460SG	2-8℃	2460	2100	680	5	2400	220v50hz	R290	990


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，标配白款，黑款价格增加
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器一键控温/除雾/除雾控制
- 柜内配LED照明灯
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32°C 65% H.R的环境条件下为0°C至+7°C
- 电压220V 50/60Hz

We reserve the right to change specifications without prior notice.

- Standard white plastic coated exterior and interior, black coated optional with price increase
- Designed for beverages and packaged products
- Plastic coated steel grid shelving, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature.
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 220V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
定制尺寸咨询	Custom dimensions	consult

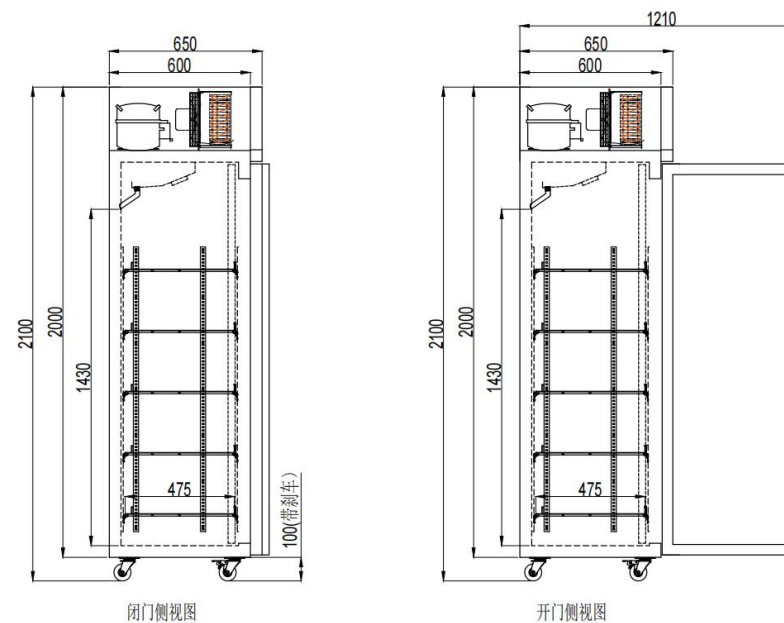



HR380PJ

HR680PJ
HR1180PJHR1670PJ
HR1860PJ

HR2220PJ

型号 mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR380PJ	2-8℃	620	1900	650	5	400	220v50hz	R290	285
HR680PJ	2-8℃	1110	1980	600	5	800	220v50hz	R290	450
HR1180PJ	2-8℃	1260	1980	600	5	1000	220v50hz	R290	490
HR1670PJ	2-8℃	1670	1980	600	5	1300	220v50hz	R290	565
HR1860PJ	2-8℃	1860	1980	600	5	1600	220v50hz	R290	565
HR2220PJ	2-8℃	2200	1980	600	5	1800	220v50hz	R290	990



技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器—键控温/除雾/除雾控制
- 柜内LED照明
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境下为0℃至+7℃
- 电压230V 50/60Hz


We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

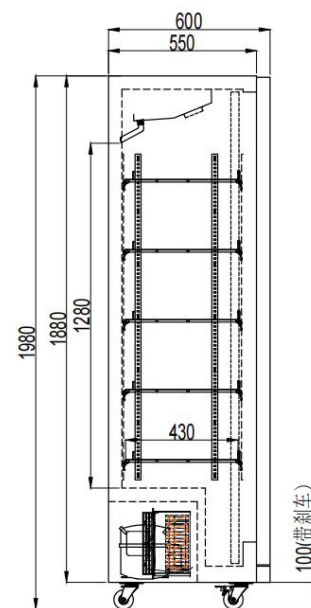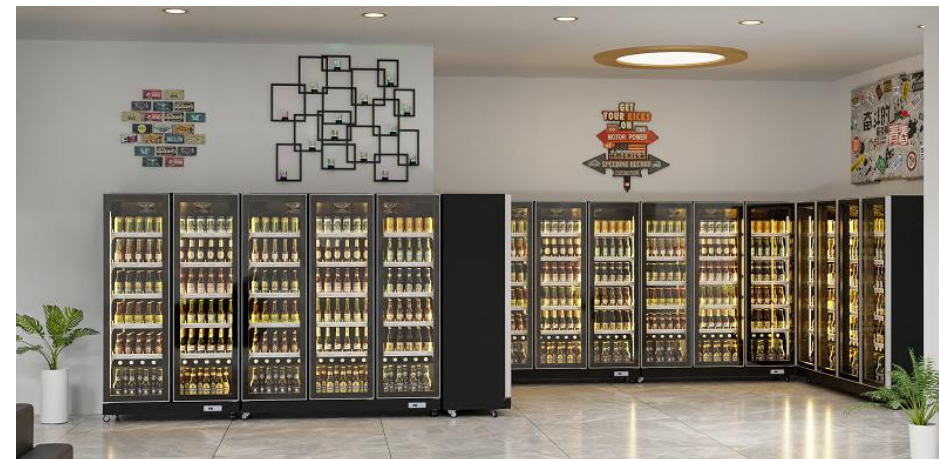

闭门侧视图

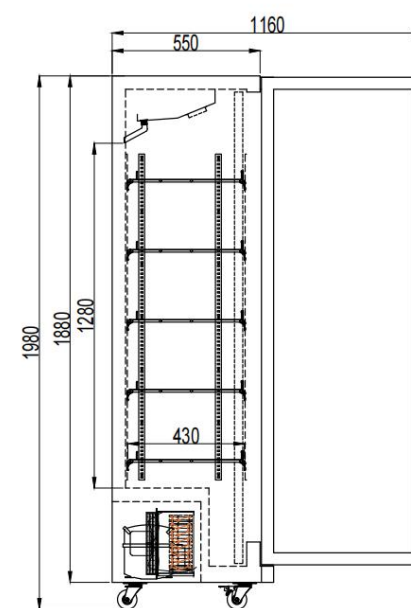

开门侧视图



HR380XZ



HR1180XZ

HR1680XZ
HR1860XZ

HR2460XZ

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR380XZ	2-8℃	620	2100	680	5	420	220v50hz	R290	285
HR1180XZ	2-8℃	1260	2100	680	5	930	220v50hz	R290	490
HR1680XZ	2-8℃	1680	2100	680	5	1280	220v50hz	R290	565
HR1860XZ	2-8℃	1860	2100	680	5	1430	220v50hz	R290	565
HR2460XZ	2-8℃	2460	2100	680	5	1900	220v50hz	R290	990


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，标准白款，黑款价格增加
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器一键控温/除雾/除雾控制
- 柜内配LED照明灯
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32°C 65% H.R的环境下条件下为0°C至+7°C
- 电压220V 50/60hz

We reserve the right to change specifications without prior notice.

- Standard white plastic coated exterior and interior, optional black coated price increase
- Designed for beverages and packaged products
- Plastic coated steel grid shelving, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature.
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior LED lighting
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 220V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
定制尺寸咨询	Custom dimensions	consult

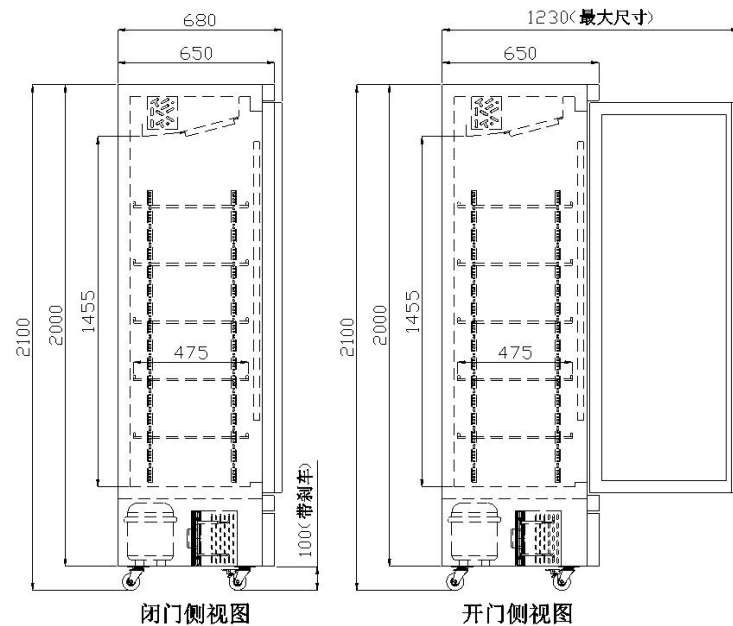



HRSZ-380



HRQP-380

mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR380XK	2-8°C	620	2100	730	5	420	220v50hz	R290	285
HR1180XK	2-8°C	1260	2100	730	5	1050	220v50hz	R290	490
HR1860XK	2-8°C	1860	2100	730	5	1520	220v50hz	R290	565
HR2460XK	2-8°C	2460	2100	730	5	2070	220v50hz	R290	990


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器一键控温/除雾/除雾控制
- 室内LED照明
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32°C 65% H.R的环境条件下为0°C至+7°C
- 电压230V 50/60Hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

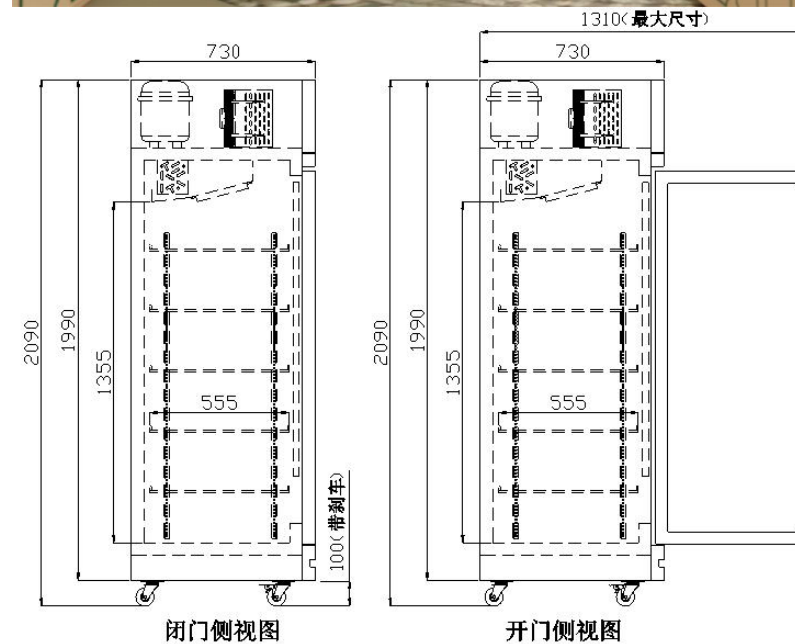



型号Model	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	(°C)	(mm)	(mm)	(mm)	(pc)	(L)			(W)
HR-750LC	2-8	750	1980	750	5	475	230V50HZ	R290	695
HR-1380LC	2-8	1380	1980	750	10	1005	230V50HZ	R290	1715
HR-1980LC	2-8	1980	1980	750	15	1450	230V50HZ	R290	2243


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 密封式压缩机，高启动扭矩
- 通风式蒸发器
- 数字温度控制和除霜功能
- 室内LED照明
- 静态冷凝单元，免维护
- 绝缘材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32°C 65% H.R.的环境下为0°C至+7°C
- 电压230V 50/60hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Hermetic compressor high starting torque
- Ventilated evaporator
- Digital temperature control and defrost
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	Glass door lock	\$5
更换制冷剂	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色	Other exterior or interior color	consult
定制尺寸	Customized size	consult

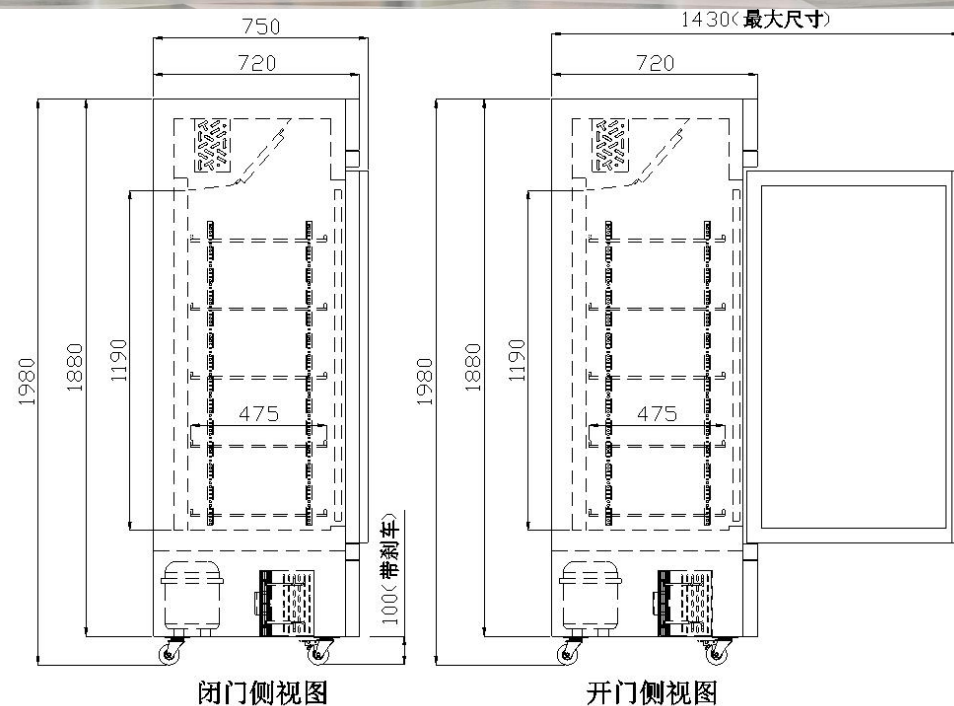



HRPJ-380



HRPJ-1260



HRPJ-1670

型号 mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HRPJ-380	2-8℃	620	1980	600	5	380	220v50hz	R290	310
HRPJ-1260	2-8℃	1260	1980	600	5	830	220v50hz	R290	620
HRPJ-1670	2-8℃	1670	1980	600	5	1100	220v50hz	R290	620
HRPJ-1860	2-8℃	1860	1980	600	5	1260	220v50hz	R290	682
HRPJ-2200	2-8℃	2200	1980	600	5	1450	220v50hz	R290	984


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为蛋糕、鲜花冷藏设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 数字温度控制和风冷无霜功能
- 室内LED照明
- 静态冷凝单元，免维护
- 自动蒸发水
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境条件下为0℃至+7℃
- 电压230V 50/60hz


We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for preservation of cakes and flowers
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital temperature control and air-cooled frost-free
- Interior lighting LED
- Static condensing unit, maintenance-free
- Automatic evaporation of water
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

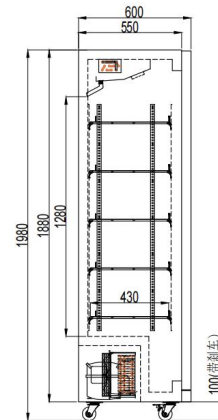

闭门侧视图

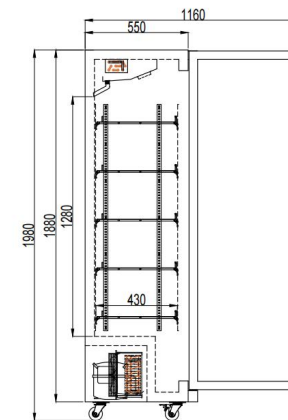

开门侧视图



HRSZ-380



HRXZ-380



HRQP-380

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	<i>Temp range</i>	<i>length</i>	<i>height</i>	<i>depth</i>	<i>shelves</i>	<i>capacity</i>	<i>voltage</i>	<i>refrigerant</i>	<i>power</i>
	°C	(mm)	(mm)	(mm)		(L)			W
HR-2000	2-8℃	2000	2100	750	5	2000	220v50hz	R404	1500
HR-2600	2-8℃	2600	2100	750	5	2625	220v50hz	R404	1500
HR-3230	2-8℃	3230	2100	750	5	3300	220v50hz	R404	2250
HR-OTHER	2-8℃	customization			5	/	380v50hz	R404	/

技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 密封式压缩机，高启动扭矩
- 通风式蒸发器，印在不锈钢上
- 数字温度控制和除霜功能
- 柜内LED照明
- 静态冷凝单元，免维护
- 绝缘材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境条件下为0℃至+7℃
- 电压230V 50/60hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Hermetic compressor high starting torque
- Ventilated evaporator printed on stainless steel
- Digital temperature control and defrost
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	<i>glass door lock</i>	\$5
更换制冷剂咨询	<i>Refrigerant replacement</i>	consult
玻璃门加热	<i>Heated glass door</i>	\$35/door
自动蒸发水	<i>Automatic evaporation of water</i>	\$25
两侧加贴纸	<i>Add stickers on both sides</i>	\$20/set
230V 60Hz / 115V 60Hz	<i>230V 60Hz / 115V 60Hz</i>	consult
其他外观或内饰颜色咨询	<i>other exterior or interior color</i>	consult
防撞条咨询	<i>bumpers</i>	consult





型号mod.	温度范围	长度	高度	宽度	吊篮	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	basket	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-C1450	-18℃~-22℃	1450	800/880	875	3	500	220-240V-50Hz	R290	528
HR-C1850	-18℃~-22℃	1850	730/830	875	4	600	220-240V-50Hz	R290	550
HR-C2100	-18℃~-22℃	2100	800/880	875	4	800	220-240V-50Hz	R290	600
HR-C2500	-18℃~-22℃	2500	800/880	875	5	1100	220-240V-50Hz	R290	750

技术和结构特性如有变化，恕不另行通知。


- 内外层采用黑色环氧树脂层压钢板
- 滑动门
- 标准照明：能效高的室内LED灯
- 内部排水沟
- 架子和室内隔板。包括4个隔板
- 注入式聚氨酯保温材料，70毫米厚，低GWP值和零ODP影响
- 蒸发器在箱体内部
- 通过热气体自动除霜
- 电子温度控制和温度计
- 气候类别 4（30°C，55%相对湿度）
- 工作温度范围 -22°C至-18°C
- 制冷剂 R-290
- 2200组合套装：用于整合SMR-2200-LSL-AD上部的设备

"Upperdeck"的顶部价格仅包括顶部部分，加上相应的SMR 2200

LSL可以组成一个组合体 - 连接两部分的套件已包含在价格中。

We reserve the right to change specifications without prior notice.

- Exterior and interior in black EPOXY laminated sheet
- Standard Glass Sliding doors
- Standard lighting:energy efficient interior LED
- Interior drain channel
- Shelves and interior dividers.Includes 4 dividers
- Injected polyurethane insulation,70mm, low GWP and zero ODP effect
- Evaporator printed inside the chamber
- Automatic defrost by hot gas
- Electronic temperature control and thermometer
- Climate class 4 (30 °C,55%R.H.)
- Operating range-26°C-16°C
- Refrigerant R-290
- 2200 combi kit:kit to incorporate the upper part of SMR-2200-LSL-AD price for the top only (Upperdeck)
Add the corresponding SMR 2200 LSL to form a Combi
-The kit to join both parts is included in the price

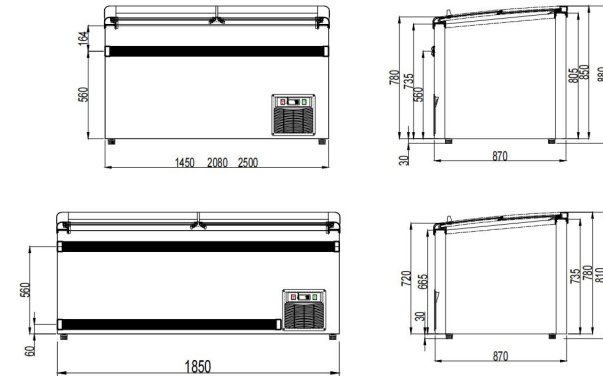

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
4个轮子	set 4 wheels	\$15
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult



型号Mod.	温度范围	长度	高度	宽度	吊篮	容量	电压频率	制冷剂	功率
	Temp range	Length	Height	Depth	Basket	Capacity	Voltage	Refrigerant	Power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-A1850	-18-22℃	1850	880	870	4	600	220V-50Hz	R290	550
HR-A2100	-18-22℃	2100	880	870	4	850	220V-50Hz	R290	600
HR-A2500	-18-22℃	2500	880	870	5	1050	220V-50Hz	R290	750





技术和结构特性如有变化，恕不另行通知。

- 内外层采用黑色环氧树脂层压钢板
- 滑动门，采用经过耐火和低辐射处理的钢化玻璃
- 标准照明：能效高的室内LED灯
- 内部排水沟
- 架子和室内隔板。包括4个隔板
- 注入式聚氨酯保温材料，70毫米厚，低GWP值和零ODP影响
- 蒸发器在腔体内印刷
- 螺旋式冷凝器，免维护
- 通过热气体自动除霜
- 电子温度控制和温度计
- 气候类别 4（30°C，55%相对湿度）
- 工作温度范围 -22°C至-18°C
- 制冷剂 R-290
- 2200组合套装：用于整合SMR-2200-LSL-AD上部的设备

"Upperdeck"的顶部价格仅包括顶部部分，加上相应的SMR 2200 LSL可以组成一个组合体 - 连接两部分的套件已包含在价格中。

We reserve the right to change specifications without prior notice.

- Exterior and interior in black EPOXY laminated sheet
- Sliding doors,in tempered glass with refractory and low-emissive treatment -Standard lighting:energy efficient interior LED
- Interior drain channel
- Shelves and interior dividers.Includes 4 dividers
- Injected polyurethane insulation,70mm,low GWP and zero ODP effect
- Evaporator printed inside the chamber
- Helical condenser,maintenance free
- Automatic defrost by hot gas
- Electronic temperature control and thermometer
- Climate class 4 (30 °C,55%R.H.)
- Operating range-22°C-18°C
- Refrigerant R-290
- 2200 combi kit:kit to incorporate the upper part of SMR-2200-LSL-AD price for the top only (Upperdeck)
- Add the corresponding SMR 2200 LSL to form a Combi
- The kit to join both parts is included in the price

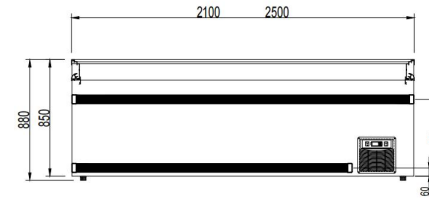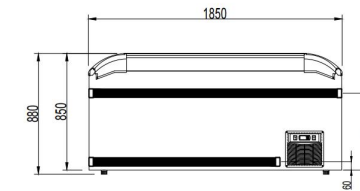

定制方案	Customized Solution	\$
门锁	Glass door lock	\$5
4个轮子	Set 4 wheels	\$15
机架	Island freezer (rack)	\$65
两侧加贴纸	Add stickers on both sides	\$20/set
220V 50Hz / 110V 60Hz	220V 50Hz / 110V 60Hz	consult
其他外观或内饰颜色咨询	Other exterior or interior color	consult
防撞条咨询	Bumpers	consult

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	℃	(mm)	(mm)	(mm)		(L)			W
HR-678A上风冷冷冻 下直冷冷冻	≤-18~-22℃	673	2130	890	3层/3片	336	220v50hz	R290	721
HR-1268A上风冷冷冻 下直冷冷冻	≤-18~-22℃	1260	2130	890	3层/6片	702	220v50hz	R290	1210
HR-1518A上风冷冷冻 下直冷冷冻	≤-18~-22℃	1508	2130	890	3层/6片	860	220v50hz	R290	1415
HR-1858A上风冷冷冻 下直冷冷冻	≤-18~-22℃	1849	2130	890	3层/9片	1069	220v50hz	R290	1835
HR-678B上风冷冷藏 下直冷冷冻	2~8℃--18~-22℃	673	2130	890	3层/3片	336	220v50hz	R290	553
HR-1268B上风冷冷藏 下直冷冷冻	2~8℃--18~-22℃	1260	2130	890	3层/6片	702	220v50hz	R290	893
HR-1518B上风冷冷藏 下直冷冷冻	2~8℃--18~-22℃	1508	2130	890	3层/6片	860	220v50hz	R290	1082
HR-1858B上风冷冷藏 下直冷冷冻	2~8℃--18~-22℃	1849	2130	890	3层/9片	1069	220v50hz	R290	1406
HR-688C上直冷冷藏 下直冷冷冻	2~8℃--18~-22℃	1200	2070	780	3层/3片	651	220v50hz	R290	455
HR-868C上直冷冷藏 下直冷冷冻	2~8℃--18~-22℃	1500	2070	780	3层/3片	844	220v50hz	R290	553
HR-1088C上直冷冷藏 下直冷冷冻	2~8℃--18~-22℃	1800	2070	780	3层/9片	1013	220v50hz	R290	628

技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，灰色
- 滑动门，采用经过耐火和低辐射处理的钢化玻璃
- 标准照明：能效高的室内LED灯
- 内部排水沟
- 架子和室内隔板。包括4个隔板
- 注入式聚氨酯保温材料，70毫米厚，低GWP值和零ODP影响
- 蒸发器在腔体内印刷
- 螺旋式冷凝器，免维护
- 通过热气体自动除霜
- 电子温度控制和温度计
- 气候类别 4（30°C，55%相对湿度）
- 工作温度范围 -22°C至-18°C
- 制冷剂 R-290
- 2200组合套装：用于整合SMR-2200-LSL-AD上部的设备

"Upperdeck"的顶部价格仅包括顶部部分，加上相应的SMR 2200 LSL可以组成一个组合体 - 连接两部分的套件已包含在价格中。

We reserve the right to change specifications without prior notice.

- Gray plastic coated exterior and interior
- Sliding doors, in tempered glass with refractory and low-emissive treatment
- Standard lighting: energy efficient interior LED
- Interior drain channel
- Shelves and interior dividers. Includes 4 dividers
- Injected polyurethane insulation, 70mm, low GWP and zero ODP effect
- Evaporator printed inside the chamber
- Helical condenser, maintenance free
- Automatic defrost by hot gas
- Electronic temperature control and thermometer
- Climate class 4 (30 °C, 55% R.H.)
- Operating range -26 °C -16 °C
- Refrigerant R-290
- 2200 combi kit: kit to incorporate the upper part of SMR-2200-LSL-AD
- price for the top only (Upperdeck)
- Add the corresponding SMR 2200 LSL to form a Combi
- The kit to join both parts is included in the price



定制方案	Customized Solution	\$
门锁	glass door lock	\$5
4个轮子	set 4 wheels	\$15
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult



HR380PJS	HR1260PJS			HR1860PJS			HR2460PJS		
型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR380PJS	-18-22	620	2050	780	5	450	230V-50Hz	R290	900
HR1260PJS	-18-22	1260	2050	780	10	930	230V-50Hz	R290	1500
HR1860PJS	-18-22	1860	2050	780	15	1430	230V-50Hz	R290	1650
HR2460PJS	-18-22	2460	2050	780	20	1900	230V-50Hz	R290	2400

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

内外均为彩钢喷涂板材，黑白款同价

门具有自动关闭系统，防止意外开启，磁性密封条，且可改变开启方向

三层玻璃门，具有发热丝除雾功能

内置双LED灯内部照明。

加固的塑料涂层钢丝层架，高度可调

控制面板和压缩机通风格栅可拆卸

风扇辅助的冷凝单元

风扇辅助的蒸发器，带有环氧防腐涂层

门开启时蒸发器风扇停止运转

自动蒸发除霜水

40公斤/立方米密度的聚氨酯保温材料，零ODP和GWP



数字温度控制、优化除霜、开门和高温冷凝报警。高效管

理能源消耗

工作温度为32°C

- White or black plastic coated exterior and interior, same price
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Triple-glazed glass door with heating function
- Double LEDs internal lighting
- REINFORCED shelves made of plasticized steel wire, height adjustable
- Control panel and compressor ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32° ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
两侧加贴纸咨询	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

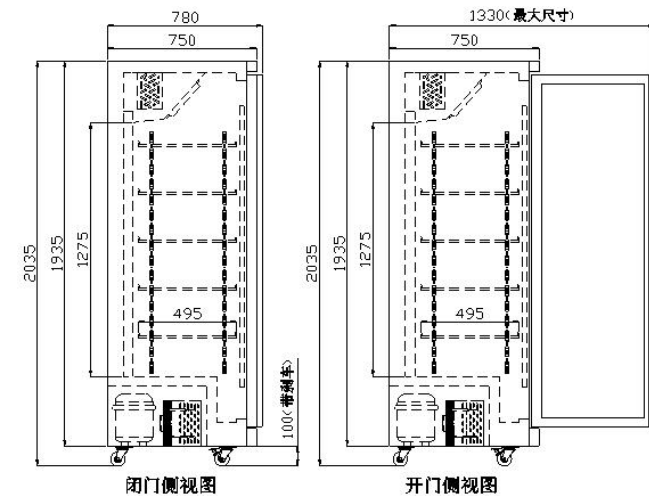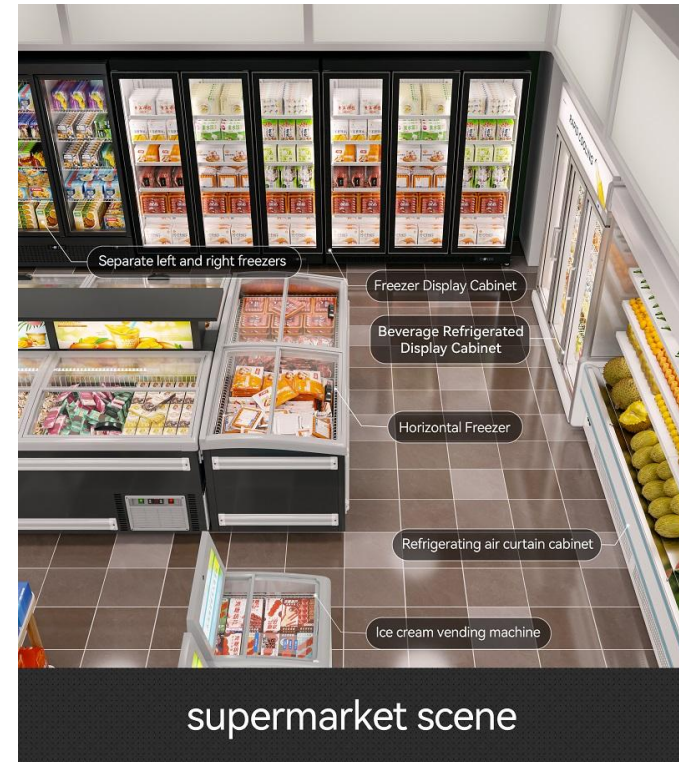



HR380XZS		HR1260XZS			HR1860XZS			HR2460XZS	
型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	℃	(mm)	(mm)	(mm)		(L)			W
HR380XZS	-18-22	620	2100	780	5	450	230V-50Hz	R290	900
HR1260XZS	-18-22	1260	2100	780	10	930	230V-50Hz	R290	1500
HR1860XZS	-18-22	1860	2100	780	15	1450	230V-50Hz	R290	1650
HR2460XZS	-18-22	2460	2100	780	20	1900	230V-50Hz	R290	2400



技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 内外均为彩钢喷涂板材，黑白款同价
- 门具有自动关闭系统，防止意外开启，磁性密封条，且可改变开启方向
- 三层玻璃门，具有发热丝除雾功能
- 内置双LED灯内部照明
- 加固的塑料涂层钢丝层架，高度可调
- 控制面板和压缩机通风格栅可拆卸
- 风扇辅助的冷凝单元
- 风扇辅助的蒸发器，带有环氧防腐涂层
- 门开启时蒸发器风扇停止运转
- 自动蒸发除霜水
- 40公斤/立方米密度的聚氨酯保温材料，零ODP和GWP
- 数字温度控制、优化除霜、开门和高温冷凝报警。高效管理能源消耗
- 工作温度为32°C

- White or black plastic coated exterior and interior, same price
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Triple-glazed glass door with heating function
- Double LEDs internal lighting
- REINFORCED shelves made of plasticized steel wire, height adjustable
- Control panel and compressor ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32° ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

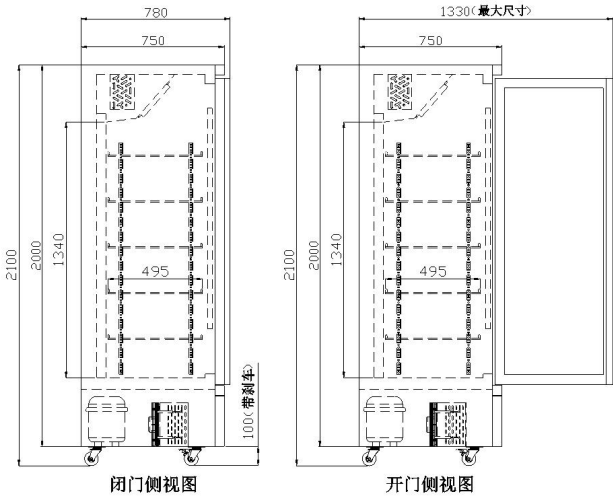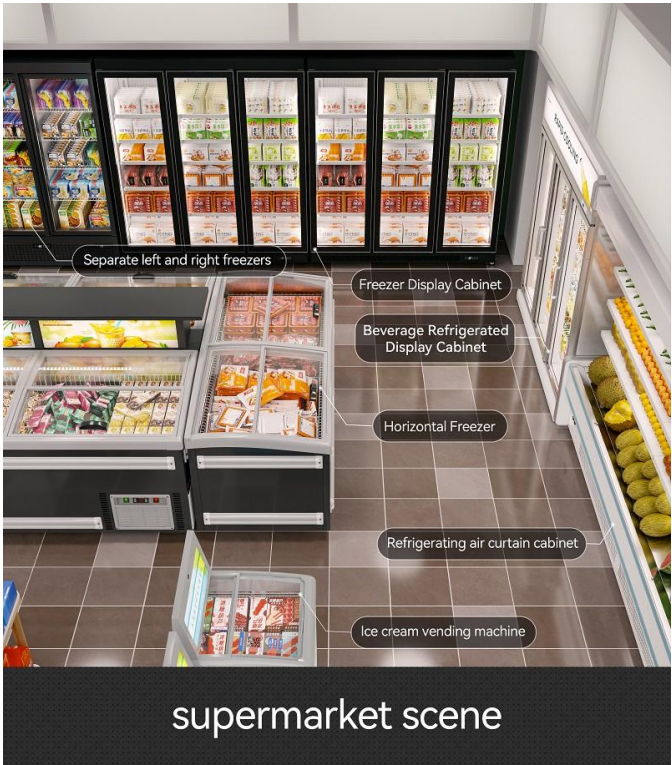



HR380PJ5



HR1180PJ5



HR1860PJ5

型号Model	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-47DM	-18~-22℃	750	1980	750	5	400L	220V50HZ	R290	695
HR-950LDM	-18~-22℃	1380	1980	750	5	1000L	220V50HZ	R290	1715
HR-1400LDM	-18~-22℃	2010	1980	750	5	1600L	220V50HZ	R290	2243



技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

内外均为彩钢喷涂板材，黑白款同价
门具有自动关闭系统，防止意外开启，磁性密封条，且可
改变开启方向
三层玻璃门，具有发热功能
内置双LED灯内部照明
加固的塑料涂层钢丝层架，高度可调
控制面板和压缩机通风格栅可拆卸
风扇辅助的冷凝单元
风扇辅助的蒸发器，带有环氧防腐涂层
门开启时蒸发器风扇停止运转
自动蒸发除霜水
40公斤/立方米密度的聚氨酯保温材料，零ODP和GWP
数字温度控制、优化除霜、开门和高温冷凝报警。高效管
理能源消耗
工作温度为32℃

- White or black plastic coated exterior and interior, same price
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Triple-glazed glass door with heating function
- Double LEDs internal lighting
- REINFORCED shelves made of plasticized steel wire, height adjustable
- Control panel and compressor ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32° ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
两侧加贴纸	Add stickers on both sides	\$20/set
220V 50Hz / 110V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

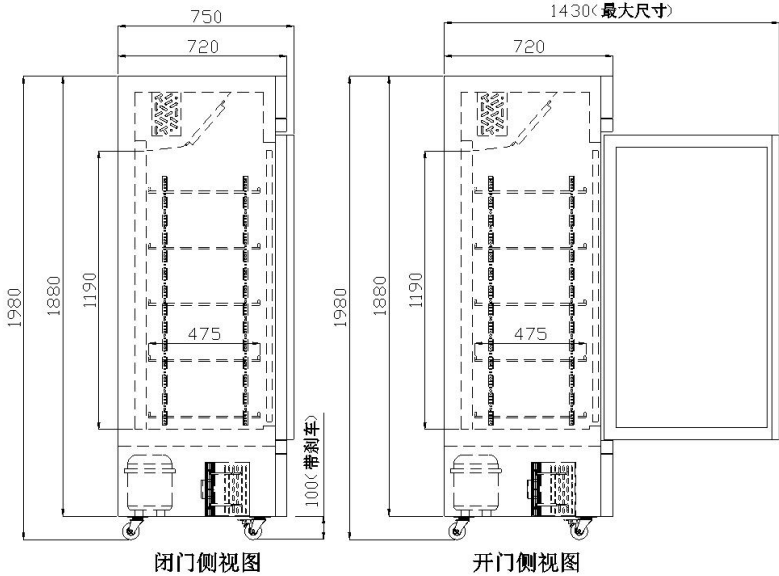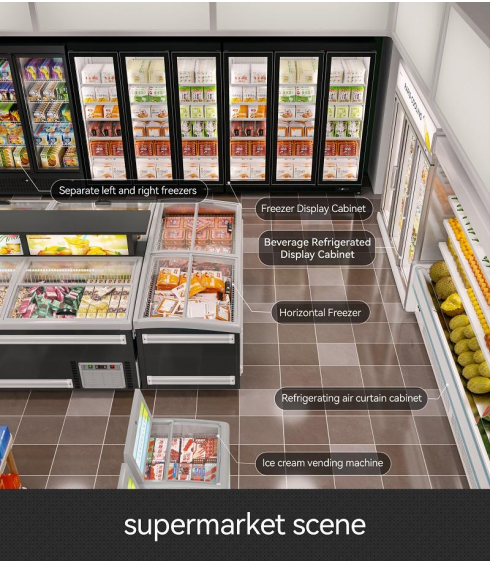



HR380LD

HR1260LD

HR1860LD

HR2460LD

型号 mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR380LD	-18-22	620	2100	780	5	450	220V-50Hz	R290	900
HR1260LD	-18-22	1260	2100	780	10	930	220V-50Hz	R290	1500
HR1860LD	-18-22	1860	2100	780	15	1430	220V-50Hz	R290	1650
HR2460LD	-18-22	2460	2100	780	20	1900	220V-50Hz	R290	2400


技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

内外均为彩钢喷涂板材，黑白款同价
门具有自动关闭系统，防止意外开启，磁性密封条，且可
改变开启方向
三层玻璃门，具有发热功能
内置双LED灯内部照明
加固的塑料涂层钢丝层架，高度可调
控制面板和压缩机通风格栅可拆卸
风扇辅助的冷凝单元
风扇辅助的蒸发器，带有环氧防腐涂层
门开启时蒸发器风扇停止运转
自动蒸发除霜水
40公斤/立方米密度的聚氨酯保温材料，零ODP和GWP
数字温度控制、优化除霜、开门和高温冷凝报警。高效管
理能源消耗
工作温度为32°C

- White or black plastic coated exterior and interior, same price
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Triple-glazed glass door with heating function
- Double LEDs internal lighting
- REINFORCED shelves made of plasticized steel wire, height adjustable
- Control panel and compressor ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32° ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

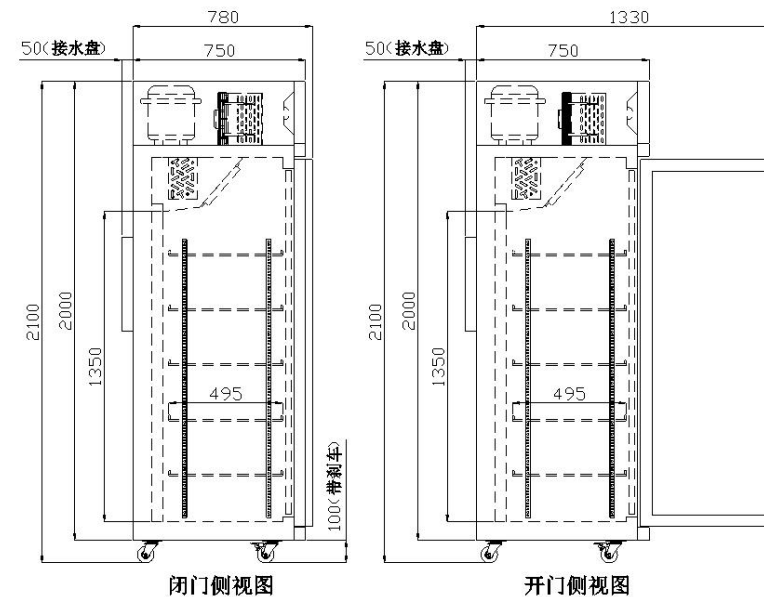



HR-500

HR-900

HR-1350

HR-1800

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	<i>Temp range</i>	<i>length</i>	<i>height</i>	<i>depth</i>	<i>shelves</i>	<i>capacity</i>	<i>voltage</i>	<i>refrigerant</i>	<i>power</i>
	°C	(mm)	(mm)	(mm)		(L)			W
HR-500	2-8℃	500	540	850	2	110	220v50hz	R290	120
HR-900	2-8℃	900	540	850	2	205	220v50hz	R290	190
HR-1350	2-8℃	1350	540	850	2	328	220v50hz	R290	220
HR-1800	2-8℃	1800	540	850	2	490	220v50hz	R290	300

技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器
- 微电脑数显温控器一键控温/除雾/除雾控制
- 室内LED照明
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境条件下为0℃至+7℃
- 电压230V 50/60hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
4个轮子	set 4 wheels	\$15
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult



HRSZ-380



HRQP-380

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	<i>Temp range</i>	<i>length</i>	<i>height</i>	<i>depth</i>	<i>shelves</i>	<i>capacity</i>	<i>voltage</i>	<i>refrigerant</i>	<i>power</i>
	°C	(mm)	(mm)	(mm)		(L)			W
HR-620	2-8℃	620	2100	680	5	420	220v50hz	R290	310
HR-1260	2-8℃	1260	2100	680	5	930	220v50hz	R290	620
HR-1860	2-8℃	1860	2100	680	5	1430	220v50hz	R290	760
HR-2460	2-8℃	2460	2100	750	5	1900	220v50hz	R290	950

技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，
- 微电脑数显温控器一键控温/除雾/除雾控制
- 室内LED照明
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境条件下为0℃至+7℃
- 电压230V 50/60hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult



HR10BT



HR20BT



HR30BT



HRBT40

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR10BT	2-8℃	500	865	530	2	100	220v50hz	R290	160
HR20BT swing door	2-8℃	900	865	530	2	200	220v50hz	R290	190
HR20BTS sliding door	2-8℃	900	865	530	2	200	220v50hz	R290	190
HR30BT swing door	2-8℃	1350	865	530	2	300	220v50hz	R290	220
HR30BTS sliding door	2-8℃	1350	865	530	2	300	220v50hz	R290	220


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器—键控温/除雾/除雾控制
- 室内LED照明
- 静态冷凝单元，免维护
- 绝缘材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境条件下为0℃至+7℃
- 电压230V 50/60hz


We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
4个轮子	set 4 wheels	\$15
玻璃门加热	Heated glass door	\$35/door
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult

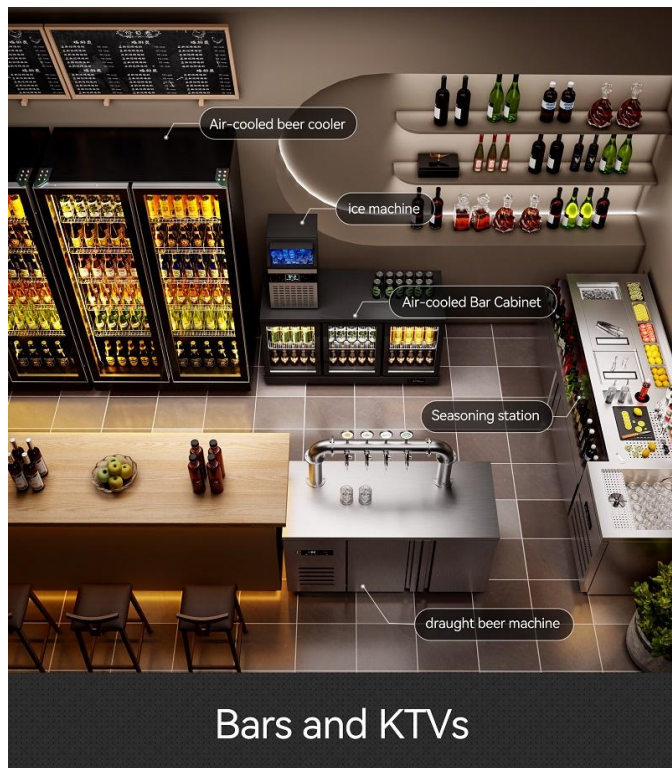

Bars and KTVs

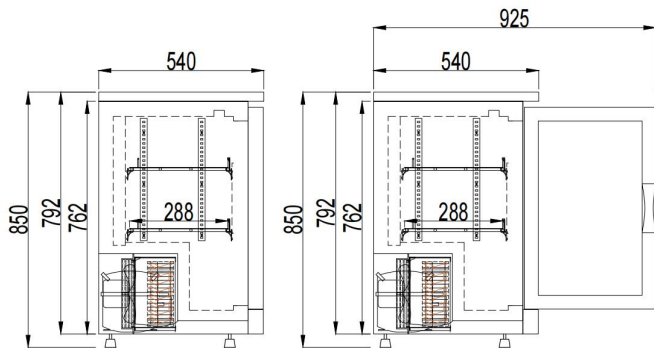



型号 mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	<i>Temp range</i>	<i>length</i>	<i>height</i>	<i>depth</i>	<i>shelves</i>	<i>capacity</i>	<i>voltage</i>	<i>refrigerant</i>	<i>power</i>
	°C	(mm)	(mm)	(mm)		(L)			W
	-18	1800	2200	1200			220V50hz	R410	


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器一键控温/除雾/除雾控制
- 柜内LED照明
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32°C 65% H.R的环境条件下为0°C至+7°C
- 电压230V 50/60hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	door lock	\$5
更换制冷剂	Refrigerant replacement	consult
加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
220V 50Hz / 110V 60Hz	220V 50Hz / 110V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

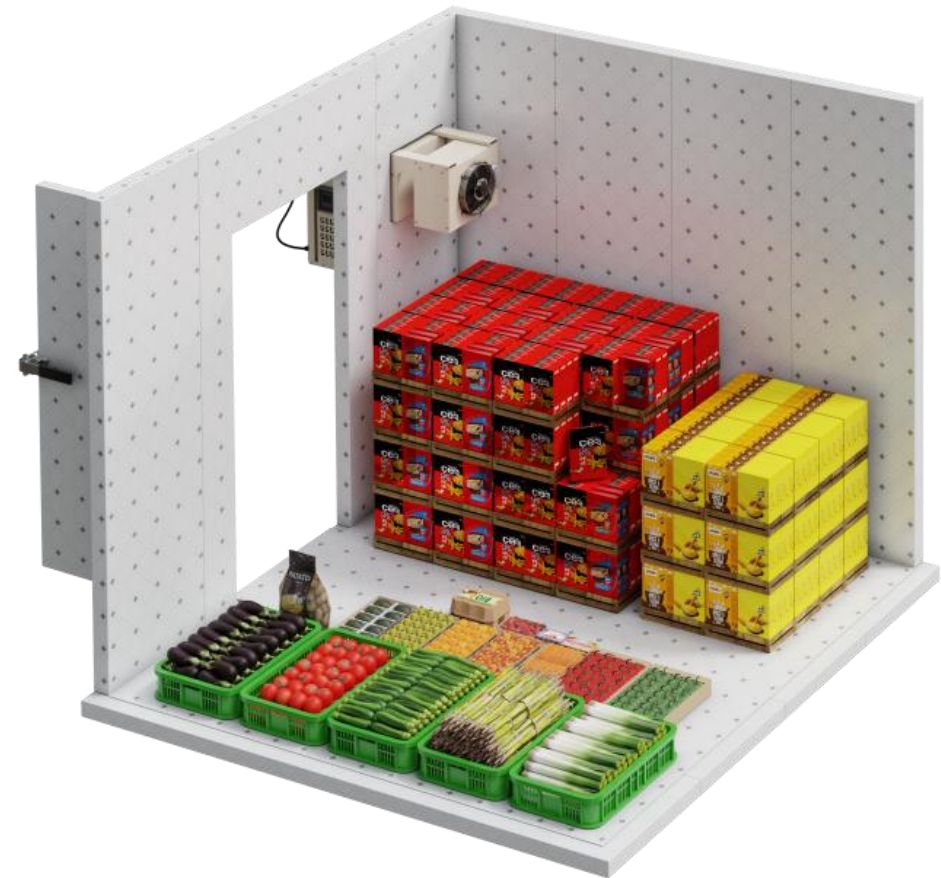

PRODUCT 产品参数


SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	230
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	90
Approx. Litre:	(约) 升	
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	84*35.5*75.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Elcctronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	85
Cold Wall (kg):	手动除霜 (公斤)	100
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL CUL CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS

尺寸图

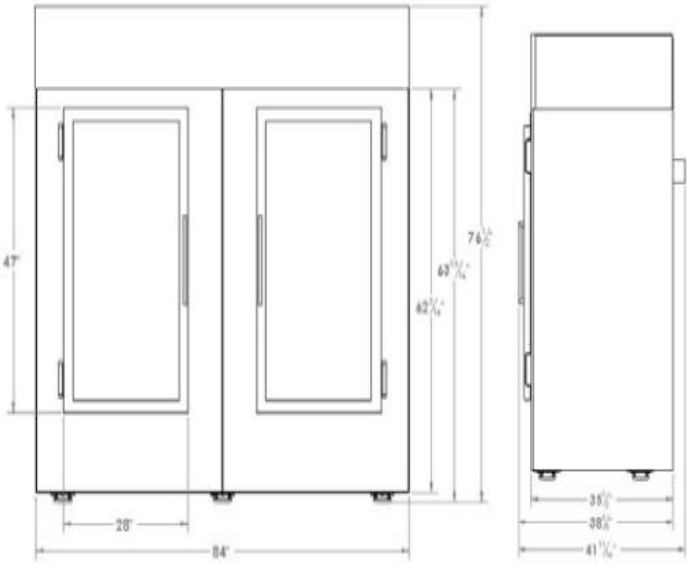

PRODUCT 产品参数


SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	260
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	100
Approx. Litre:	(约) 升	
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.3*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Elcctronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	100
Cold Wall (kg):	手动除霜 (公斤)	1100
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115*60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL CUL CE
DOE Compliant:	是否符合DOE	yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS

尺寸图

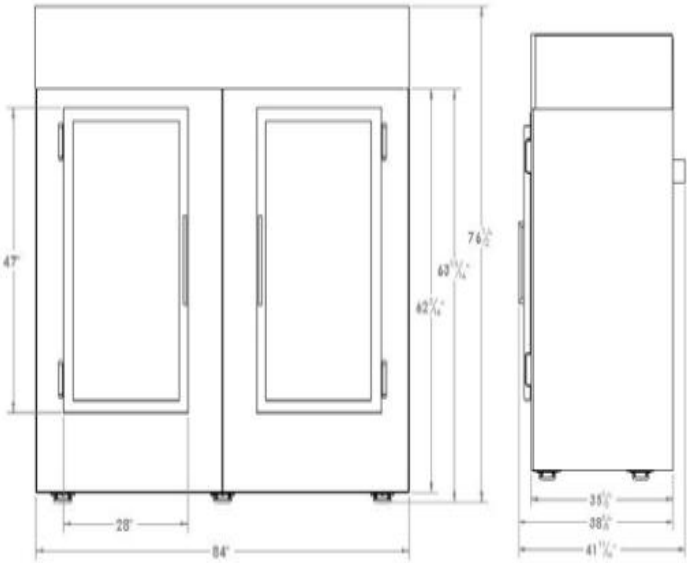


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	180
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	70
Approx. Litre:	(约) 升	60
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	73*30*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	545
Cold Wall (kg):	手动除霜 (公斤)	510
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL,CUL,CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



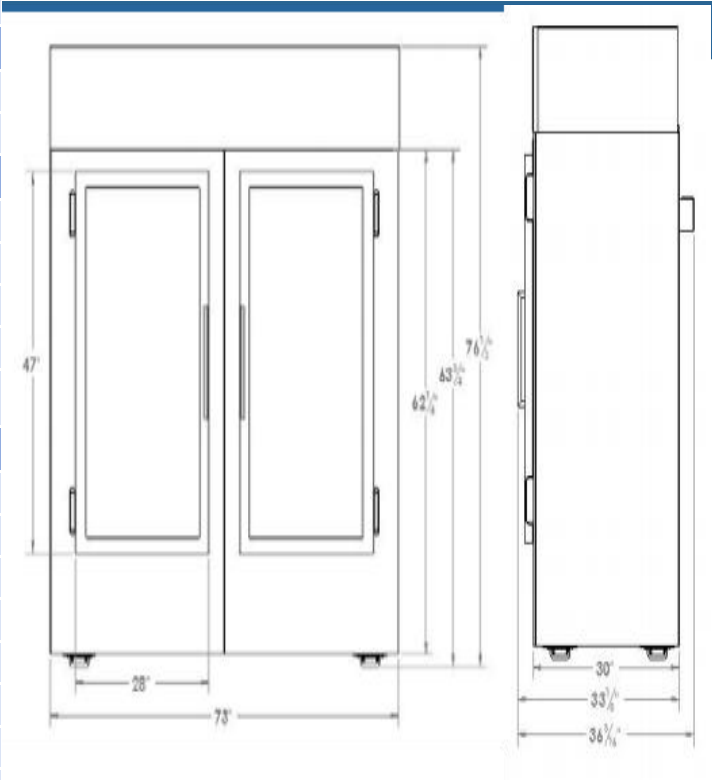


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	170
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	65
Approx. Litre:	(约) 升	65
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	64*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	490
Cold Wall (kg):	手动除霜 (公斤)	455
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL,CUL,CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



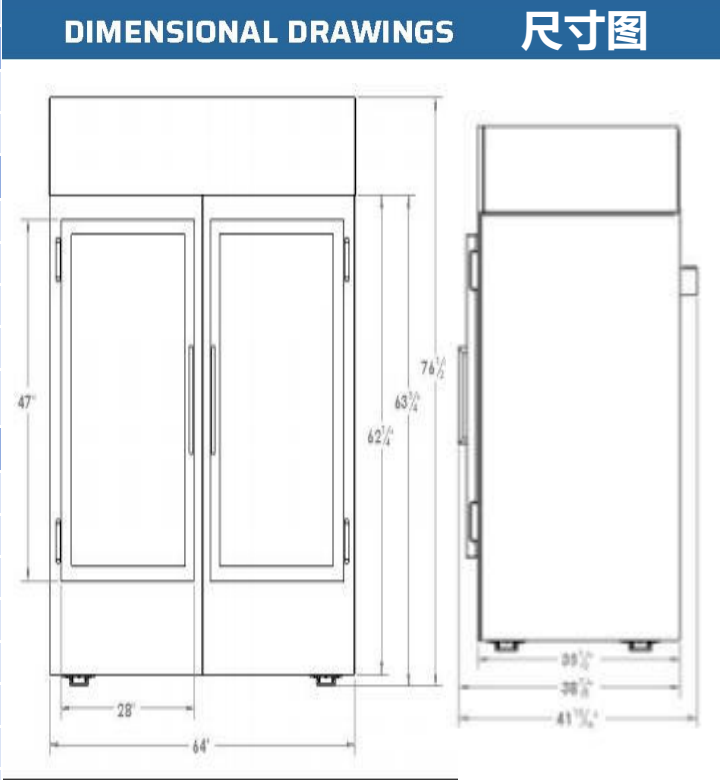


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	170
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	65
Approx. Litre:	(约) 升	65
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	64*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	490
Cold Wall (kg):	手动除霜 (公斤)	455
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL, CUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request




DIMENSIONAL DRAWINGS 尺寸图

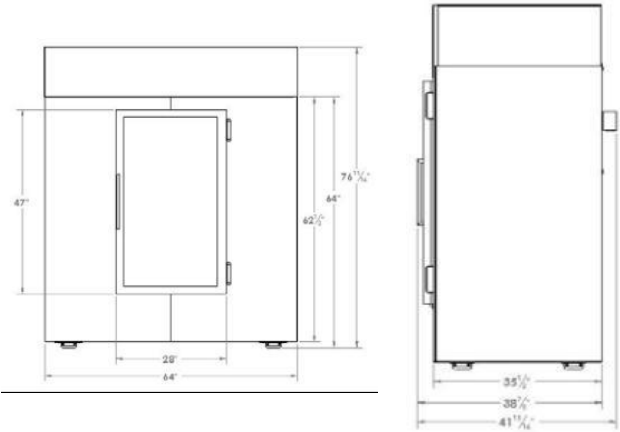



DIMENSIONAL DRAWINGS 尺寸图

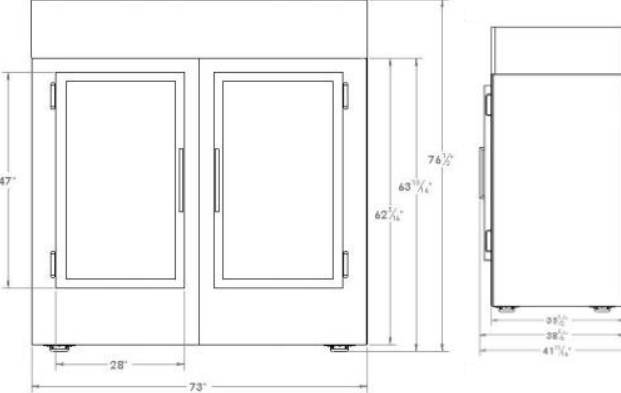



PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	L085UCGE
Auto Defrost – R290:	自动除霜R290	L085UAGE
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	230
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	90
Approx. Litre:	(约) 升	85
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	84*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	620
Cold Wall (kg):	手动除霜 (公斤)	590
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL CUL CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	L100UAGE
Auto Defrost – R290:	自动除霜R290	L100UCGP
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	260
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	100
Approx. Litre:	(约) 升	100
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	655
Cold Wall (kg):	手动除霜 (公斤)	605
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL CUL CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	L100UAGE
Auto Defrost – R290:	自动除霜R290	L100UCGP
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	260
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	100
Approx. Litre:	(约) 升	100
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	655
Cold Wall (kg):	手动除霜 (公斤)	605
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL CUL CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request





PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	L100UAGE
Auto Defrost – R290:	自动除霜R290	L100UCGP
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	260
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	100
Approx. Litre:	(约) 升	100
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28*47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	655
Cold Wall (kg):	手动除霜 (公斤)	605
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL CUL CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS 尺寸图

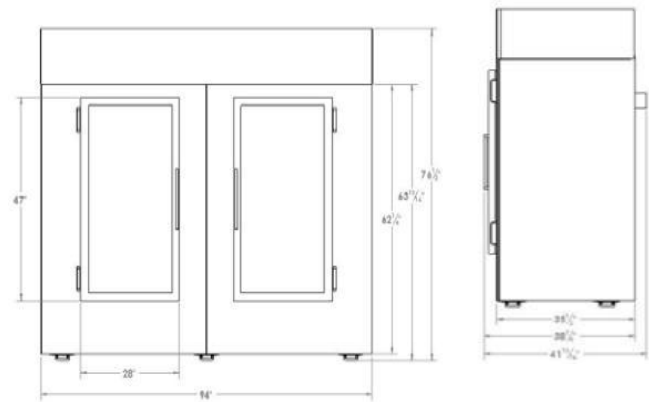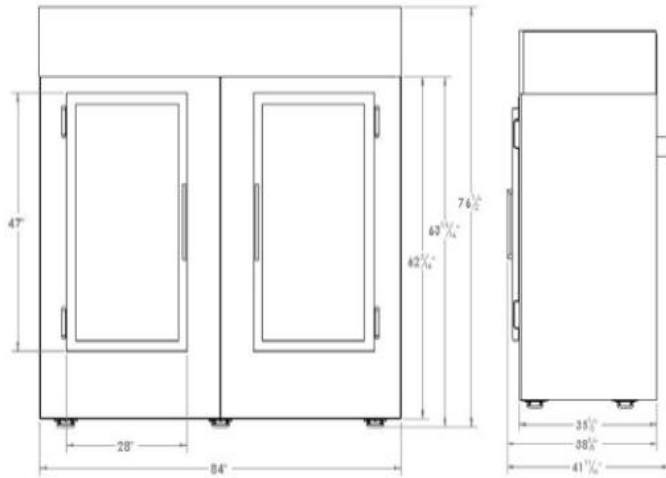


PRODUCT 产品参数
SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	CR115UAGX
Auto Defrost – R290:	自动除霜R290	CR115UAGP
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	290
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	110
Approx. Litre:	(约) 升	115
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	72 x 48 x 75
Door Size (W” x H”):	门尺寸 (宽x高)	28 x 47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16 -24
Control:	控温方式	电子
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	820
Cold Wall (kg):	手动除霜 (公斤)	820
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	20
Auto Defrost (Amps):	自动除霜 (安培)	13
Cold Wall (Amps):	手动除霜 (安培)	13
230V/50Hz Available:	是否有230伏/50赫兹	是
Other		其它参数
Compressor (HP):	压缩机 (马力)	3/4
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL, cUL
DOE Compliant:	是否符合DOE	是
CARB Complaint:	是否符合CARB	R290 Un
NSF Available:	是否有NSF	否



DIMENSIONAL DRAWINGS 尺寸图

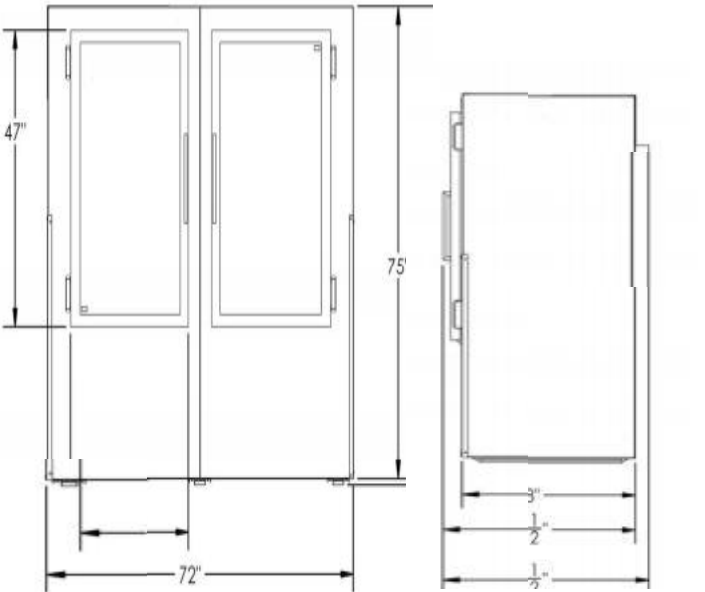


PRODUCT 产品参数
SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	TD120UAGX
Auto Defrost – R290:	自动除霜R290	TD120UAGP
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	310
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	120
Approx. Litre:	(约) 升	120
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	72 x 48 x 88
Door Size (W” x H”):	门尺寸 (宽x高)	28 x 47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	电子
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	820
Cold Wall (kg):	手动除霜 (公斤)	820
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	20
Auto Defrost (Amps):	自动除霜 (安培)	13
Cold Wall (Amps):	手动除霜 (安培)	13
230V/50Hz Available:	是否有230伏/50赫兹	是
Other		其它参数
Compressor (HP):	压缩机 (马力)	3/4
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL, cUL
DOE Compliant:	是否符合DOE	是
CARB Complaint:	是否符合CARB	R290 Units
NSF Available:	是否有NSF	否



DIMENSIONAL DRAWINGS 尺寸图

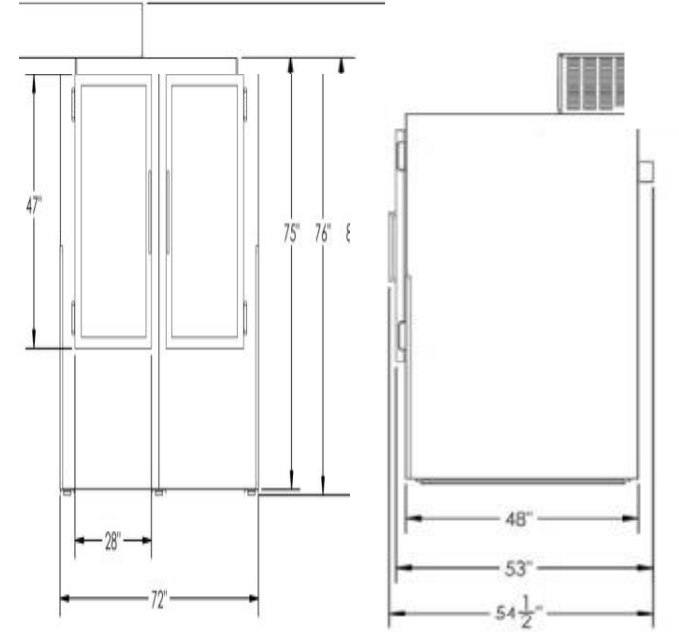

PRODUCT 产品参数


SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	360
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	140
Approx. Litre:	(约) 升	150
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	96 x 48 x 75
Door Size (W” x H”):	门尺寸 (宽x高)	28 x 47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16 -24
R404a Control:	Mechanical	
R290 Control:	Electronic	
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	970
Cold Wall (kg):	手动除霜 (公斤)	
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	20
Auto Defrost (Amps):	自动除霜 (安培)	13
Cold Wall (Amps):	手动除霜 (安培)	
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	3/4
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL, cUL
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	R290 Units
NSF Available:	是否有NSF	NO



DIMENSIONAL DRAWINGS

尺寸图

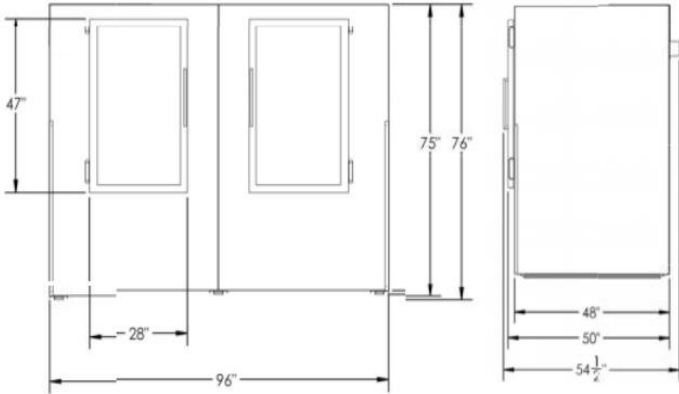


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	390
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	150
Approx. Litre:	(约) 升	155
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	96 x 48 x 88
Door Size (W” x H”):	门尺寸 (宽x高)	28 x 47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16 -24
Control:	控温方式	
R404a Control:	Mechanical	
R290 Control:	Electronic	
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	970
Cold Wall (kg):	手动除霜 (公斤)	
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	20
Auto Defrost (Amps):	自动除霜 (安培)	13
Cold Wall (Amps):	手动除霜 (安培)	
230V/50Hz Available:	是否有230伏/50赫兹	UponRequest
Other		其它参数
Compressor (HP):	压缩机 (马力)	3/4
Refrigerant:	制冷剂	R404a,R209
Certifications:	认证	UL,cUL
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	R209 Units
NSF Available:	是否有NSF	No



DIMENSIONAL DRAWINGS

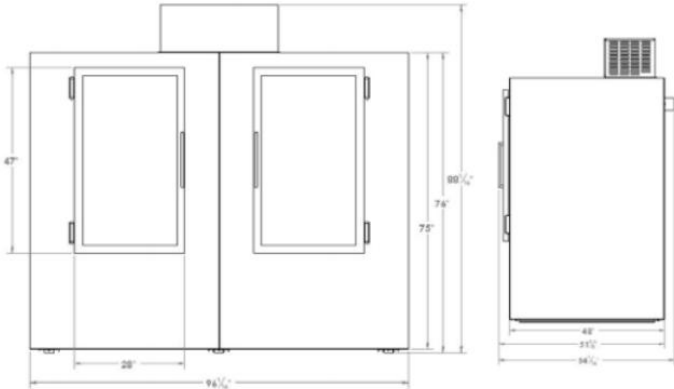


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	80
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	30
Approx. Litre:	(约) 升	30
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	36 x 30 x76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27 x 46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16 x 24
Control:	控温方式	Electronic
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	305
Cold Wall (kg):	手动除霜 (公斤)	280
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a, R209
Certifications:	认证	UL, cUL, CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS

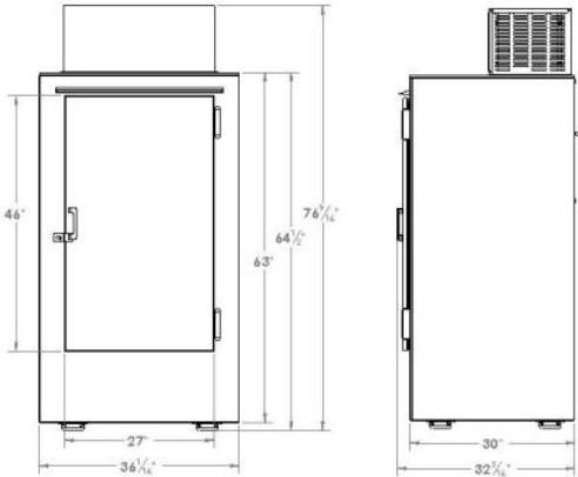


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	120
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	45
Approx. Litre:	(约) 升	40
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	50.5 x30 x76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27 x 48
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	350
Cold Wall (kg):	手动除霜 (公斤)	325
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a, R209
Certifications:	认证	UL, cUL, CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS

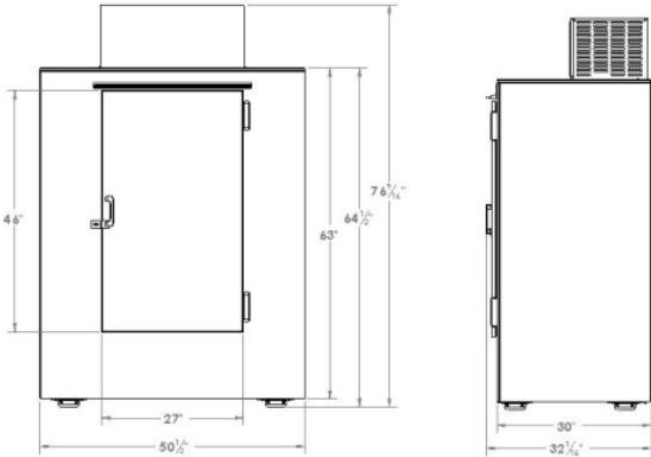


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	110
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	42
Approx. Litre:	(约) 升	40
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	50.5*35.5*68.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*27
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	345
Cold Wall (kg):	手动除霜 (公斤)	320
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	
Min. Circuit Required (Amps):	所需最小电路 (安培)	
Auto Defrost (Amps):	自动除霜 (安培)	
Cold Wall (Amps):	手动除霜 (安培)	
230V/50Hz Available:	是否有230伏/50赫兹	
Other		其它参数
Compressor (HP):	压缩机 (马力)	
Refrigerant:	制冷剂	
Certifications:	认证	
DOE Compliant:	是否符合DOE	
CARB Complaint:	是否符合CARB	
NSF Available:	是否有NSF	



DIMENSIONAL DRAWINGS 尺寸图

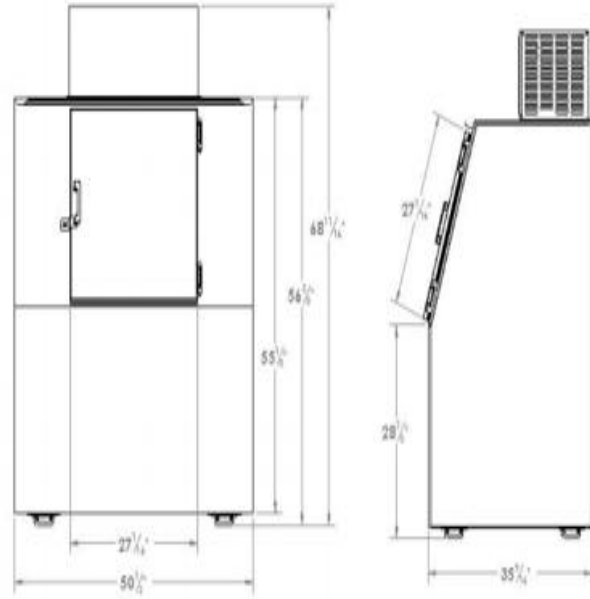


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	
Approx. Litre:	(约) 升	
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	
Door Size (W” x H”):	门尺寸 (宽x高)	
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	
Control:	控温方式	
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	
Cold Wall (kg):	手动除霜 (公斤)	
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	
Min. Circuit Required (Amps):	所需最小电路 (安培)	
Auto Defrost (Amps):	自动除霜 (安培)	
Cold Wall (Amps):	手动除霜 (安培)	
230V/50Hz Available:	是否有230伏/50赫兹	
Other		其它参数
Compressor (HP):	压缩机 (马力)	
Refrigerant:	制冷剂	
Certifications:	认证	
DOE Compliant:	是否符合DOE	
CARB Complaint:	是否符合CARB	
NSF Available:	是否有NSF	



DIMENSIONAL DRAWINGS 尺寸图

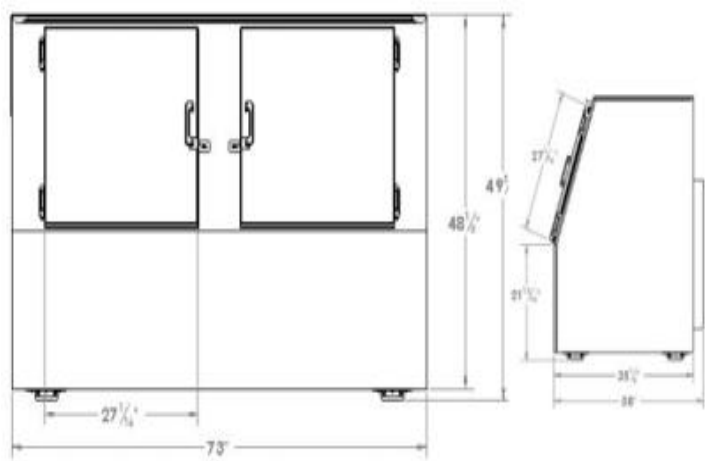

PRODUCT 产品参数
SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	180
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	70
Approx. Litre:	(约) 升	60
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	73*30*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	24*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control



Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	455
Cold Wall (kg):	手动除霜 (公斤)	425
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL, CUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request

DIMENSIONAL DRAWINGS 尺寸图

PRODUCT 产品参数
SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	180
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	70
Approx. Litre:	(约) 升	60
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	73*35.5*68.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*27
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control

Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	435
Cold Wall (kg):	手动除霜 (公斤)	400
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL, CUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS 尺寸图


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	170
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	65
Approx. Litre:	(约) 升	61
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.5*49.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*27
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	495
Cold Wall (kg):	手动除霜 (公斤)	462
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	upon request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL,cUL,CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS 尺寸图

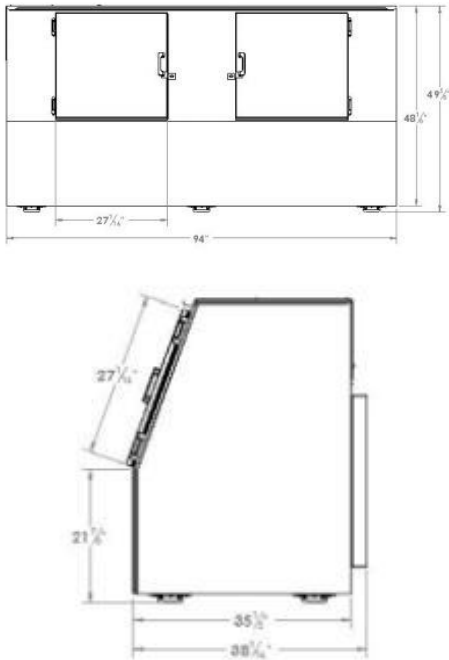


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	170
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	65
Approx. Litre:	(约) 升	65
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	64*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronically controlled
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	430
Cold Wall (kg):	手动除霜 (公斤)	405
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL,cUL,CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS 尺寸图

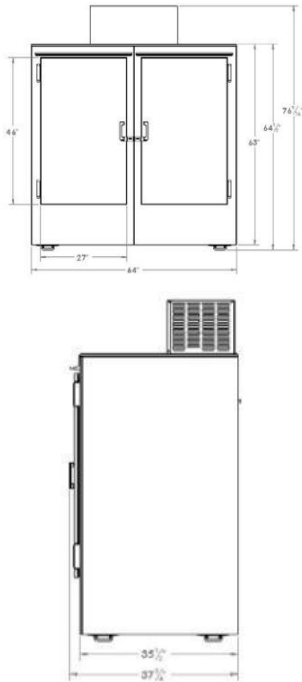

PRODUCT 产品参数

SPECIFICATIONS


Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	170
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	65
Approx. Litre:	(约) 升	65
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	64*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	430
Cold Wall (kg):	手动除霜 (公斤)	405
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL, CUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	210
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	80
Approx. Litre:	(约) 升	75
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	73*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	490
Cold Wall (kg):	手动除霜 (公斤)	450
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL, CUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request

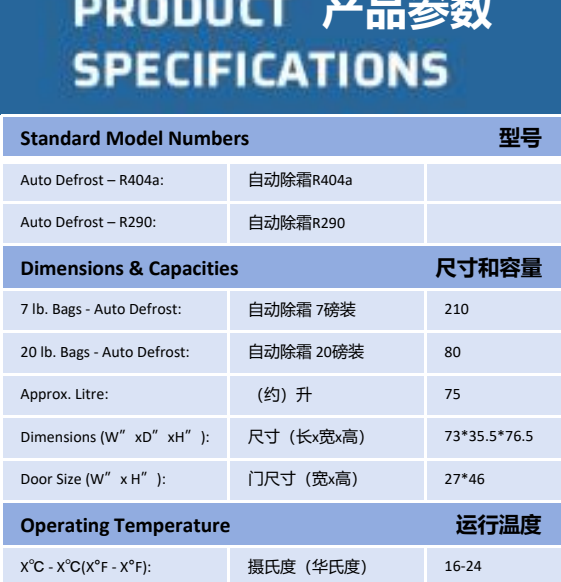

PRODUCT 产品参数


SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	210
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	80
Approx. Litre:	(约) 升	75
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	73*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	490
Cold Wall (kg):	手动除霜 (公斤)	450
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a, R290
Certifications:	认证	UL, CUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request




DIMENSIONAL DRAWINGS

尺寸图

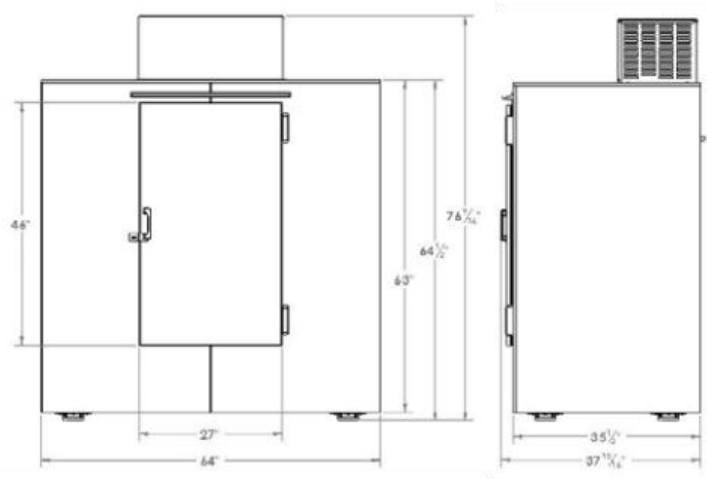

DIMENSIONAL DRAWINGS

尺寸图

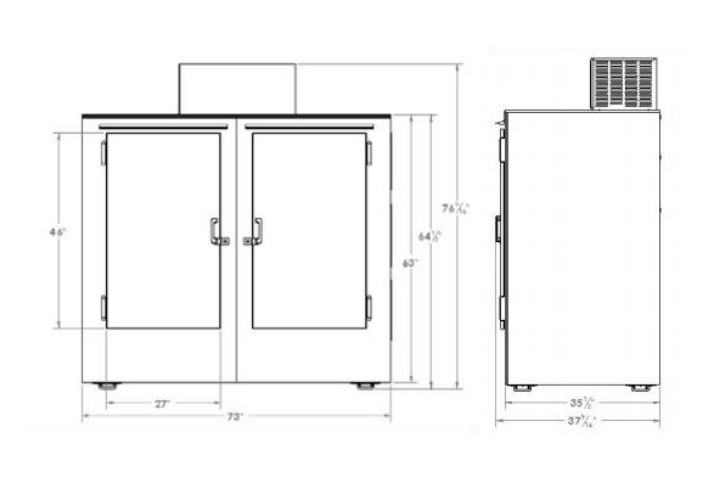


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	210
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	82
Approx. Litre:	(约) 升	75
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.5*68.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*27
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	520
Cold Wall (kg):	手动除霜 (公斤)	480
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	110/50
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL, cUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS

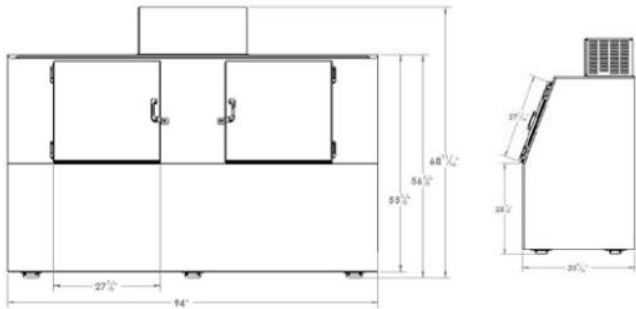


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	230
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	90
Approx. Litre:	(约) 升	85
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	84*35.5*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	545
Cold Wall (kg):	手动除霜 (公斤)	505
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	
Min. Circuit Required (Amps):	所需最小电路 (安培)	
Auto Defrost (Amps):	自动除霜 (安培)	
Cold Wall (Amps):	手动除霜 (安培)	
230V/50Hz Available:	是否有230伏/50赫兹	
Other		其它参数
Compressor (HP):	压缩机 (马力)	
Refrigerant:	制冷剂	
Certifications:	认证	
DOE Compliant:	是否符合DOE	
CARB Complaint:	是否符合CARB	
NSF Available:	是否有NSF	




DIMENSIONAL DRAWINGS 尺寸图

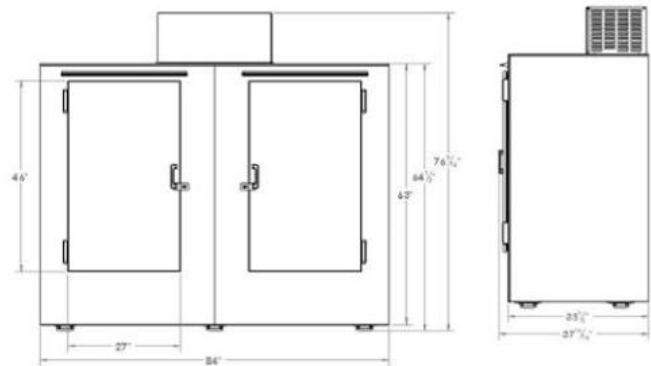

PRODUCT 产品参数

SPECIFICATIONS


Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	260
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	100
Approx. Litre:	(约) 升	100
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	94*35.6*76.5
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic Control
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	560
Cold Wall (kg):	手动除霜 (公斤)	530
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115*60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	10
Cold Wall (Amps):	手动除霜 (安培)	10
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/2
Refrigerant:	制冷剂	R404a,R290
Certifications:	认证	UL, cUL, CE
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request

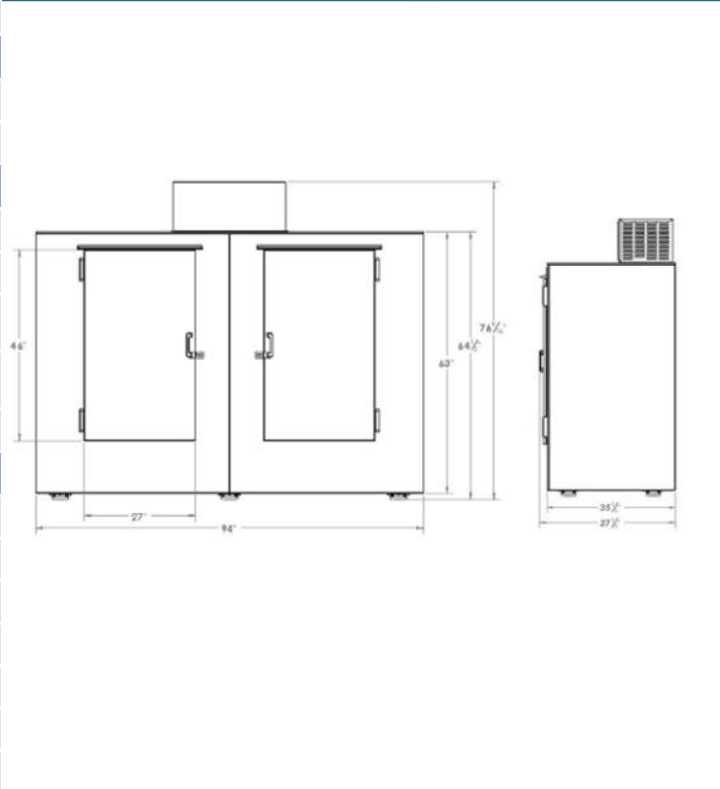

PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	290
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	110
Approx. Litre:	(约) 升	115
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	72*48*75
Door Size (W” x H”):	门尺寸 (宽x高)	27*46
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	820
Cold Wall (kg):	手动除霜 (公斤)	
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	20
Auto Defrost (Amps):	自动除霜 (安培)	13
Cold Wall (Amps):	手动除霜 (安培)	
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	3/4
Refrigerant:	制冷剂	R290
Certifications:	认证	UL, cUL
DOE Compliant:	是否符合DOE	YES
CARB Complaint:	是否符合CARB	R290 Units
NSF Available:	是否有NSF	NO

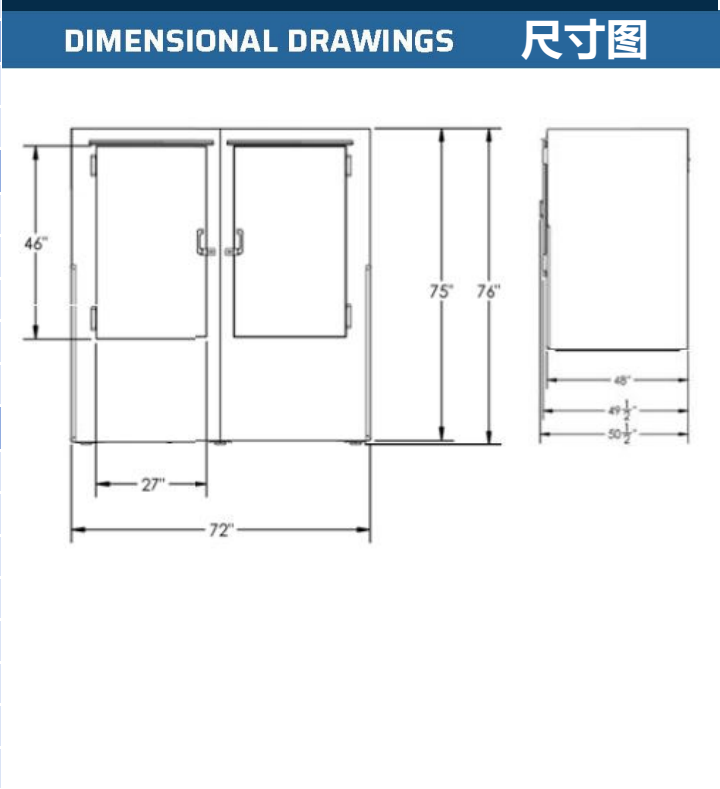


PRODUCT 产品参数

SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	80
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	30
7 lb. Bags - Cold Wall:	手动除霜 7磅装	80
20 lb. Bags - Cold Wal	手动除霜 20磅装	30
Approx. Litre:	(约) 升	30
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	36x30x76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28x47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	345
Cold Wall (kg):	手动除霜 (公斤)	330
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R4040a, R290
Certifications:	认证	UL, cUL, CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS 尺寸图

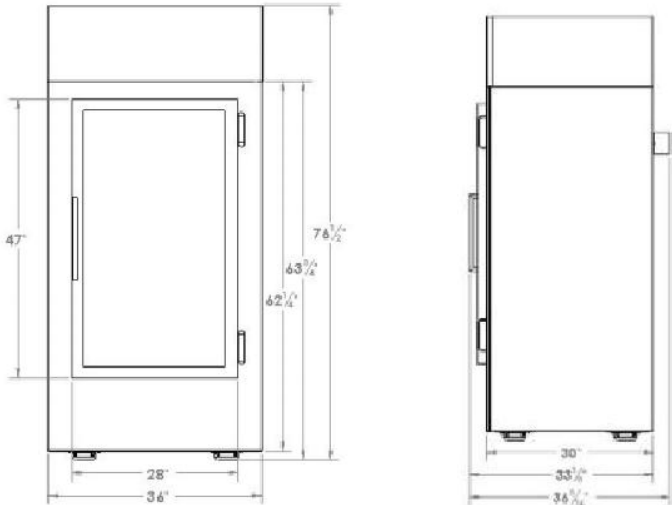


PRODUCT 产品参数


SPECIFICATIONS

Standard Model Numbers		型号
Auto Defrost – R404a:	自动除霜R404a	
Auto Defrost – R290:	自动除霜R290	
Dimensions & Capacities		尺寸和容量
7 lb. Bags - Auto Defrost:	自动除霜 7磅装	120
20 lb. Bags - Auto Defrost:	自动除霜 20磅装	45
7 lb. Bags - Cold Wall:	手动除霜 7磅装	130
20 lb. Bags - Cold Wal	手动除霜 20磅装	50
Approx. Litre:	(约) 升	40
Dimensions (W” xD” xH”):	尺寸 (长x宽x高)	50.5x30x76.5
Door Size (W” x H”):	门尺寸 (宽x高)	28x47
Operating Temperature		运行温度
X°C - X°C(X°F - X°F):	摄氏度 (华氏度)	16-24
Control:	控温方式	Electronic
Product Weight		产品重量
Auto Defrost (kg):	自动除霜 (公斤)	405
Cold Wall (kg):	手动除霜 (公斤)	370
Electrical		电气参数
Voltage (V/Hz):	电压 (伏/赫兹)	115/60
Min. Circuit Required (Amps):	所需最小电路 (安培)	15
Auto Defrost (Amps):	自动除霜 (安培)	6.3
Cold Wall (Amps):	手动除霜 (安培)	6.3
230V/50Hz Available:	是否有230伏/50赫兹	Upon Request
Other		其它参数
Compressor (HP):	压缩机 (马力)	1/3
Refrigerant:	制冷剂	R4040a, R290
Certifications:	认证	UL, cUL, CE
DOE Compliant:	是否符合DOE	Yes
CARB Complaint:	是否符合CARB	Upon Request
NSF Available:	是否有NSF	Upon Request



DIMENSIONAL DRAWINGS 尺寸图

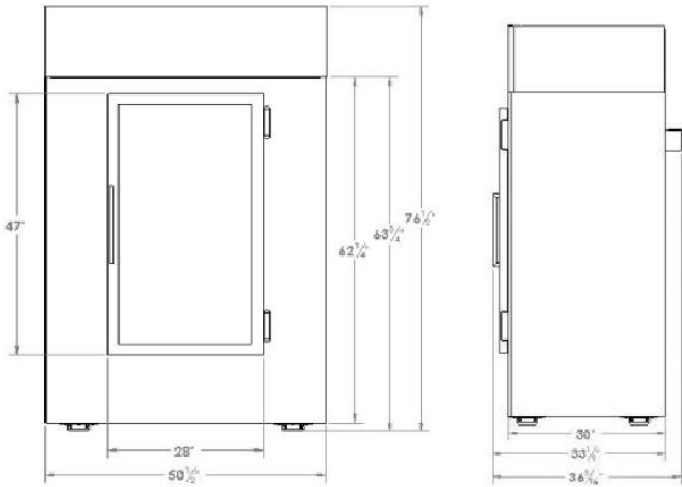



HR-380PJ

型号 mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-380PJ	2-8℃	620	2100	680	5	420	220v50hz	R290	310
HR-680PJ	2-8℃	1260	2100	680	5	930	220v50hz	R290	620
HR-1180PJ	2-8℃	1680	2100	680	5	1280	220v50hz	R290	620
HR-1670PJ	2-8℃	1860	2100	680	5	1380	220v50hz	R290	682
HR-2200PJ	2-8℃	2460	2100	680	5	1430	220v50hz	R290	984


技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 高性能低能耗压缩机，到达设定温度自动进入省电模式
- 通风式蒸发器，印在不锈钢上
- 微电脑数显温控器一键控温/除雾/除雾控制
- 柜内LED照明
- 静态冷凝单元，免维护
- 保温材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32℃ 65% H.R的环境条件下为0℃至+7℃
- 电压230V 50/60hz


We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Efficient compressor with automatic power-saving mode upon reaching set temperature
- Ventilated evaporator printed on stainless steel
- Digital display thermostat with one-button temperature control and defrost/defogging
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C + 7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

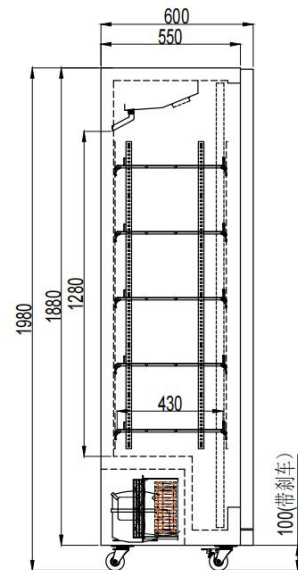

闭门侧视图

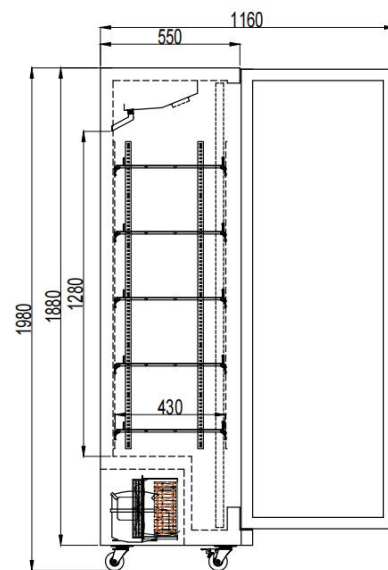

开门侧视图



HRBL-620



HRBL-1260

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HRBL-620	2-8°C	640	1980	760	4	440	220v50hz	R290	310
HRBL-1260	2-8°C	1260	1980	760	4	880	220v50hz	R290	620

技术和结构特性如有变化，恕不另行通知。

- 内外均为彩钢喷涂板材，黑白款同价
- 专为饮料和包装产品设计
- 塑料涂层钢制网格层架，高度可调
- 双层中空玻璃门，铝合金把手
- 密封式压缩机，高启动扭矩
- 通风式蒸发器，印在不锈钢上
- 数字温度控制和除霜功能
- 柜内LED照明
- 静态冷凝单元，免维护
- 绝缘材料：聚氨酯，不含CFCs，密度40公斤/立方米
- 工作温度在32°C 65% H.R.的环境条件下为0°C至+7°C
- 电压230V 50/60hz

We reserve the right to change specifications without prior notice.

- White or black plastic coated exterior and interior, same price
- Designed for beverages and packaged products
- Shelves plastic coated steel wire, adjustable height
- Double-layer hollow glass door with aluminum alloy handle
- Hermetic compressor high starting torque
- Ventilated evaporator printed on stainless steel
- Digital temperature control and defrost
- Interior lighting LED
- The content of the lightbox advertisement can be changed
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult



什么是速冻柜？


速冻柜是一种快速降低食品温度的设备。速冻柜也称为急冻柜。通常有多层架子，可以在极低的温度下储存和冷藏食品盘或平底盘。

速冻柜如何工作？

速冻柜通过将强制冷却的空气吹到放置在内部的食物上来运行。这种快速冷却过程会减小食物上出现的冰晶的尺寸。解冻食物时，大冰晶融化并导致过量水分释放，这在很大程度上影响食品的味道和质量。

速冻柜冷却食物需要多长时间？

速冻柜的目标是快速冷却食物。通常可以在90分钟内将食品温度从+90°C降至+3°C（速冷），或在约180分钟内将食品温度从+90°C降至-18°C（速冻）。这取决于温度。

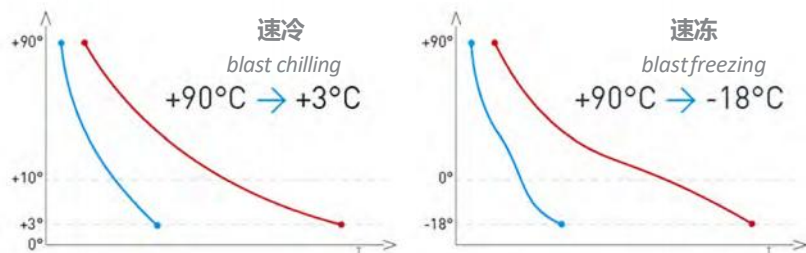**避开危险温度区**

细菌在高温下会快速繁殖。将食物长时间保存在危险温度区会增加感染食源性疾病的机会。速冻柜可快速降低食品的温度并保护它们免受危险区的影响。

Avoiding the Temperature Danger Zone

Bacteria multiply at a rapid pace on high temperatures. Keeping food in the temperature danger zone for an extended amount of time increases the chances of foodborne illness.

Blast chillers lower the temperatures of food at a rapid pace and protect food from the danger zone.

What is a Blast Chiller?

A blast chiller is a piece of equipment that quickly lowers the temperature of food. Blast chillers are also referred to as blast freezers or flash freezers. They typically have multiple shelves where food pans or sheet pans can be stored and chilled at extremely low temperatures.

How Does a Blast Chiller Work?

Blast chillers or freezers operate by blowing forced cooled air over food placed inside. This rapid cooling process decreases the size of ice crystals that appear on food. When defrosting food, large ice crystals melt and cause excess moisture to release, which largely impacts the taste and quality of your food products.


How Long Does a Blast Chiller Take to Chill Food?

The goal of a blast chiller is to chill foods at a rapid rate. They can typically bring the temperature of foods down from +90°C to +3°C (blast chilling) in less than 90 minutes or from +90°C to -18°C (blast freezing) about 180 minutes. This is dependent on the temperature

细菌不会增殖
NO bacterial proliferation
细菌开始增殖
Bacterial proliferation starts

细菌最大增殖
Maximum bacterial proliferation

细菌最小增殖
Minimum bacterial proliferation

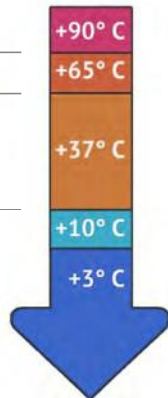**图形触摸屏界面**

我们采用带有5英寸屏幕的触摸界面，可以简单地使用速冻柜，满足最苛刻的厨师需求。直观的图标方便访问众多功能，以优化每个流程的管理。每个循环均可定制，以实现每种食品的理想工艺。

GRAPHIC TOUCH SCREEN INTERFACE

We incorporate a touch interface with a 5" screen that allows a simple and intuitive use of the blast chiller, adapted to the needs of the most demanding chefs. Intuitive icons facilitate access to the numerous functions for optimal management of each process. Each cycle is customizable to achieve the ideal process for each food.

**速冻和速冷循环**

冷却至+3°C，冷冻至-18°C，保持稠度、湿度和营养特性，减少食品内部结构中微晶的尺寸。

QUICK FREEZING AND COOLING CYCLES

Cooling to +3°C and freezing at -18°C, preserving consistency, humidity and nutritional properties, reducing the size of the microcrystals in the internal structure of the food.

解冻食物

控制解冻过程并设置正确的温度意味着减缓细菌生长过程并保持食物结构完整。

DEFROSTING FOOD

Controlling the defrosting process and setting the correct temperature means slowing down the bacterial growth process and keeping the food structure intact.

保温循环

将食物保持在设定的正温度或负温度。

TEMPERATURE MAINTENANCE CYCLE

It keeps the food at the programmed temperature, positive or negative.

冰淇淋硬化

将新鲜搅打的混合物核心位置快速冷冻在-18°C，有利于形成精细且规则的晶体，从而形成均匀的冰淇淋。

ICE CREAM HARDENING

Quickly freezes the freshly beaten mixture at -18°C in the core, favoring the formation of fine and regular crystals for a homogeneous ice cream.

预冷

在使用急速冷冻机冷却或冷冻循环运行之前，通过预冷，可以对内部隔室进行调和，以获得更好的工艺性能。

PRE-COOLING

Before operating with the blast chiller cooling or freezing cycles, with pre-cooling it is possible to temper the interior compartment for better process performance.



型号Mod.	温度范围	长度	宽度	高度	层架	容量	功率
	Temp Range	Length	Depth	Height	Tray	Capacity	Power
	℃	(mm)	(mm)	(mm)	pc	(L)	w
HRXR5	-45	880	900	1270	5	150	1500

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 内部为AISI-304不锈钢板材

- AISI-304不锈钢顶部

- GN1/1 和内部容量（托盘或架子，不包括在内）

- 层与层之间的距离为70毫米

- 通风冷凝装置

- 带防腐环氧涂层的强制空气蒸发器系统

- 膨胀阀

- 注射聚氨酯保温材料，密度40Kg/m³
- AISI-304 stainless steel inner

-AISI-304 stainless steel top

- GN1/1 and inner capacity (trays or shelves, not included)

- 70 mm distance between levels

- Ventilated condensing unit

- Forzed air evaporator system with anti-corrosion epoxy coating

- Expansion valve

- Injected polyurethane insulation, density 40 Kg/m³



型号mod.	温度范围	长度	高度	宽度	层架	容量	功率
	Temp range	length	height	depth	Tray	capacit y	power
	℃	(mm)	(mm)	(mm)	pc	(L)	w
HR-SD4510	-45	880	1850	900	10	300	1550
HR-SD6010	-60	880	2020	900	10	330	3050
HR-SD8010	-80	880	2020	900	10	330	3200



技术和结构特性如有变化，恕不另行通知。

- 内部为AISI-304不锈钢板材
- AISI-304不锈钢顶部
- GN1/1 和内部容量（托盘或架子，不包括在内）
- 层与层之间的距离为80毫米
- 通风冷凝装置
- 带防腐环氧涂层的强制空气蒸发器系统
- 膨胀阀
- 注射聚氨酯保温材料，密度40Kg/m³

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel top
- GN1/1 and inner capacity (trays or shelves, not included)
- 80 mm distance between levels
- Ventilated condensing unit
- Forced air evaporator system with anti-corrosion epoxy coating
- Expansion valve
- Injected polyurethane insulation, density 40 Kg/m³



型号mod.	温度范围	长度	高度	宽度	盘子	容量	功率
	Temp range	length	height	depth	Tray	capacity	power
	℃	(mm)	(mm)	(mm)	pc	(L)	w
HR-SD4515	-45	1000	2150	940	15	600	2300
HR-SD8015	-80	1000	2150	940	15	600	4550

- 技术和结构特性如有变化，恕不另行通知。
- 内部为AISI-304不锈钢板材
 - AISI-304不锈钢顶部
 - GN1/1 和内部容量（托盘或架子，不包括在内）
 - 层与层之间的距离为80毫米
 - 通风冷凝装置
 - 带防腐环氧涂层的强制空气蒸发器系统
 - 膨胀阀
 - 注射聚氨酯保温材料，密度40Kg/m³

- We reserve the right to change specifications without prior notice.
- AISI-304 stainless steel top
 - GN1/1 and inner capacity (trays or shelves, not included)
 - 70 mm distance between levels
 - Ventilated condensing unit
 - Forced air evaporator system with anti-corrosion epoxy coating
 - Expansion valve
 - Injected polyurethane insulation, density 40 Kg/m³



型号mod.	温度范围	长度	高度	宽度	层架	容量	功率
	Temp range	length	height	depth	Tray	capacit y	power
	℃	(mm)	(mm)	(mm)	pc	(L)	w
HR-SD4522	-45	1460	1100	2150	22	1000	4550
HR-SD8022	-80	1460	1100	2150	22	1000	6050

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 内部为AISI-304不锈钢板材

- AISI-304不锈钢顶部

- GN1/1 和内部容量（托盘或架子，不包括在内）

- 层与层之间的距离为70毫米

- 通风冷凝装置

- 带防腐环氧涂层的强制空气蒸发器系统

- 膨胀阀

- 注射聚氨酯保温材料，密度40Kg/m³

- 电压：220V60Hz、3820V/50Hz 或 60Hz、1 相或 3 相

- 外部材质：201不锈钢

- 内部材质：304不锈钢

- 压缩机：泰康

- 冷却系统：风冷

- 数字温度控制器

- 轮子：4个

- 急速冷冻室需要 30 分钟才能达到零下 70 度

- AISI-304 stainless steel top

- GN1/1 and inner capacity (trays or shelves, not included)

- 70 mm distance between levels

- Ventilated condensing unit

- Forzed air evaporator system with anti-corrosion epoxy coating

- Expansion valve

- Injected polyurethane insulation, density 40 Kg/m³

- Voltage: 220V60Hz,3820V/50Hz or 60hz, 1 phase or 3phases

- External material: 201 stainless steel

- Internal material: 304 stainless steel

- Compressor: Tecumseh

- Cooling system: Air Cooling

- Digital temperature controller

- Wheel: 4 pcs

- It takes 30 minutes for the blast freezer to reach 70 degress below zero



型号mod.	温度范围	长度	高度	宽度	层架	容量	功率
	Temp range	length	height	depth	Tray	capacit y	power
	℃	(mm)	(mm)	(mm)	pc	(L)	w
HR-SD4530	-45	1900	940	2150	30	1200	5000
HR-SD8030	-80	1900	940	2150	30	1200	9050

技术和结构特性如有变化，恕不另行通知.

- 内部为AISI-304不锈钢板材
- AISI-304不锈钢顶部
- GN1/1 和内部容量（托盘或架子，不包括在内）
- 层与层之间的距离为70毫米
- 通风冷凝装置
- 带防腐环氧涂层的强制空气蒸发器系统
- 膨胀阀
- 注射聚氨酯保温材料，密度40Kg/m³

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel top
- GN1/1 and inner capacity (trays or shelves, not included)
- 70 mm distance between levels
- Ventilated condensing unit
- Forzed air evaporator system with anti-corrosion epoxy coating
- Expansion valve
- Injected polyurethane insulation, density 40 Kg/m³



一般特点

GENERAL FEATURES

600 (snack)



700 (GN 1/1)



800 (60x40)




技术和结构特性如有变化，恕不另行通知。

- 内外均为AISI-304不锈钢板材（背面为镀锌板）
- AISI-304 不锈钢内饰
- 门带有自动关闭系统、阻塞开口、磁性垫圈以及改变开启方向的可能性
- 带有圆形前部和 100 毫米卫生立柱的工作台面（根据型号，可更换）
- 塑化钢丝层架，高度可调（根据型号，可更换）
- 不锈钢可调节腿
- 右侧可拆卸和风扇辅助冷凝器装置
- 蒸发器位于上部内侧，涂有防腐材料
- 除霜水自动蒸发

We reserve the right to change specifications without prior notice.



- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Worktop with rounded front and 100 mm sanitary upstand (depending on model, can change)
- Plasticized steel wire shelves, height adjustable (depending on model, can change)
- Stainless steel adjustable legs
- Right side removable and fan assisted condenser unit
- Evaporator on the upper internal side, coated with anti-corrosion material
- Automatic evaporation of defrost water

AISI-304

圆角边缘
rounded corner edges排水口
cleaning drainage标准碳氢化合物
standard hydrocarbon冲压成型后门
pressformed rear door可拆卸垫圈
gasket detachable135-210毫米可调节腿
135-210 mm adjustable leg顶部安装蒸发器
top mounted evaporator自闭铰链
self closing hinges可拆卸冷凝器单元
removable cond. unit

定制方案

OPTIONS ON DEMAND

无溅水
no splash-back下水口
sink花岗岩台面
granite worktop90-135毫米可调节腿
90-135 mm adjustable leg脚轮
castors黑色或白色外观
black or white exterior门锁
lock for door自动关闭抽屉
drawers (selfclosing)玻璃门
glass doors带前玻璃的抽屉
drawers with front glass左侧冷凝器单元
left side condenser unit不锈钢背面
SS rear side穿孔层架
perforated shelves碳氢化合物替代气体
hydrocarbon alternative gases电压和频率
voltage and frequency



型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-GZT900 F	0 ~+10°C	900	800/850	760	1		220v50hz	R290/R404A	571
HR-GZT900 R	-5~-20°C	900	800/850	760	1		220v50hz	R290/R404A	682
HR-GZT1200 F	0 ~+10°C	1200	800/850	760	2	274	220v50hz	R290/R404A	571
HR-GZT1200 R	-5~-20°C	1200	800/850	760	2	274	220v50hz	R290/R404A	682
HR-GZT1500 F	0 ~+10°C	1500	800/850	760	2	381	220v50hz	R290/R404A	571
HR-GZT1500 R	-5~-20°C	1500	800/850	760	2	381	220v50hz	R290/R404A	682
HR-GZT1800 F	0 ~+10°C	1800	800/850	760	3	488	220v50hz	R290/R404A	571
HR-GZT1800 R	-5~-20°C	1800	800/850	760	3	488	220v50hz	R290/R404A	682
HR-GZT2287 F	0 ~+10°C	2287	800/850	760	4	666	220v50hz	R290/R404A	571
HR-GZT2287 R	-5~-20°C	2287	800/850	760	4	666	220v50hz	R290/R404A	682

技术和结构特性如有变化，恕不另行通知

- 外观采用AISI-201不锈钢
- 内饰采用AISI-201不锈钢
- 门可逆开启，配备自动关闭系统和磁性密封条
- 双层玻璃+LED灯
- 内部采用塑料涂层钢制网格层架，高度可调，支架为不锈钢材质
- 标配4个子弹腿
- 冷藏标配钢化玻璃门，冷冻标配除雾玻璃门
- 可通风和可拆卸的冷凝单元
- 强力喷射式蒸发器，带有环氧树脂防腐涂层
- 自动蒸发除霜水
- 注入式聚氨酯绝缘材料，密度为40公斤/立方米，零ODP和GWP影响
- 数字温度控制、优化除霜、高温冷凝警报，能源消耗高效管理
- 工作环境条件：32°C

We reserve the right to change specifications without prior notice.

- AISI-201 stainless steel exterior
- AISI-201 stainless steel interior
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Double glazed doors + LEDs
- Shelves made of plasticized steel wire, height adjustable by stainless steel supports
- 4 bullet legs
- Tempered glass door with refrigerator, defogging glass with freezer
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating: 32°C ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
万向轮	set 4 casters	consult
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult



可定制：左置机组
optional leftside motor

可定制：无溅水
optinal, no splash-back





技术和结构特性如有变化，恕不另行通知

- MFB 门为标准配置
- MFB-C 双抽屉套件 + 一门作为标准配置
- MFB-CC 双抽屉组+抽屉之间的蒸发器

- AISI-304 不锈钢外壳，后侧镀锌板
- AISI-304 不锈钢内饰，冲压底部和圆角
- 带有自动关闭系统、阻塞开口、磁性垫圈和可改变开启方向的门
- 不锈钢抽屉配有伸缩式不锈钢滑轨，可完全打开，标配软关闭系统
- AISI-304 不锈钢工作台面，前部呈圆形（可选配 100 毫米卫生立柱）
- GN 1/1 搁板由塑化钢丝制成，高度可调
- AISI-304 可调节支腿，95 至 135 毫米
- 可拆卸和风扇辅助的冷凝器单元
- 风扇辅助蒸发器，带环氧防腐涂层。
- 除霜水自动蒸发
- 40 Kg/m³ 密度聚氨酯保温材料，零 ODP 和 GWP
- 数字温度控制，优化除霜，高温凝露报警。有效管理能源消耗
- 工作环境温度 40°C...

We reserve the right to change specifications without prior notice.

- MFB doors as standard
- MFB-C doubledrawer sets + one dor as standard
- MFB-CC doubledrawer sets + evaporators between drawers

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Stainless steel drawers with telescopic stainless steel slides for complete opening, soft-closing sysem as standard
- AISI-304 stainless steel worktop, with rounded front (optional with 100 mm sanitary upstand)
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 95 to 135 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating 40°C ambient



蒸发器设计用于使用 HC 或 HFC 气体- Evaporator designed to operate with HC o HFC gases

技术和结构特性如有变化，恕不另行通知

We reserve the right to change specifications without prior notice.


- MFBP 门为标准配置
- MFBP-C 双抽屉套件 + 一门作为标准配置
- MFBP-CC 双抽屉组+抽屉之间的蒸发器

- AISI-304 不锈钢外壳，后侧镀锌板
- AISI-304 不锈钢内饰，冲压底部和圆角
- 带有自动关闭系统、阻塞开口、磁性垫圈和可改变开启方向的门
- 不锈钢抽屉配有伸缩式不锈钢滑轨，可完全打开，标配软关闭系统
- AISI-304 不锈钢工作台面，前部呈圆形（可选配 100 毫米卫生立柱）
- GN 1/1 搁板由塑化钢丝制成，高度可调
- AISI-304 可调节支腿，95 至 135 毫米
- 不包括冷凝器单元
- 不包括制冷剂膨胀控制
- Dt = 12°C 时蒸发器的性能
- 风扇辅助蒸发器，带环氧防腐涂层。
- 40 Kg/m³ 密度聚氨酯保温材料，零 ODP 和 GWP
- 数字温度控制，优化除霜，高温凝露报警。有效管理能源消耗
- 工作环境温度 40°C...


- MFBP doors as standard
- MFBP-C doubledrawer sets + one dor as standard
- MFBP-CC doubledrawer sets + evaporators between drawers

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Stainless steel drawers with telescopic stainless steel slides for complete opening
- AISI-304 stainless steel worktop, with rounded front (optional with 100 mm sanitary upstand)
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 95 to 135 mm
- Condenser unit NOT INCLUDED
- Refrigerant expansion control, NOT INCLUDED
- Performance of the evaporator with Dt = 12 ° C
- Fan assisted evaporator, with epoxi anticorrosion coating.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation . Efficient management of energy consumption
- Operating 40°C ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult



门侧视图



门前视图

一般特点
GENERAL FEATURES

GN



EuroSnack



SNACK







技术和结构特性如有变化，恕不另行通知

- 内外均为AISI-304不锈钢板材（背面为镀锌板）
- AISI-304 不锈钢内饰
- 门带有自动关闭系统、阻塞开口、磁性垫圈以及改变开启方向的可能性
- 带有圆形前部和 100 毫米卫生立柱的工作台面（根据型号，可更换）
- 塑化钢丝层架，高度可调（根据型号，可更换）
- 不锈钢可调节腿
- 右侧可拆卸和风扇辅助冷凝器装置
- 蒸发器位于上部内侧，涂有防腐材料
- 除霜水自动蒸发

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Plasticized steel wire shelves, height adjustable (depending on model, can change)
- Stainless steel adjustable legs
- Removable and fan assisted condenser unit
- Evaporator on the upper internal side, coated with anti-corrosion material
- Automatic evaporation of defrost water

AISI-304

标准碳氢化合物
standard hydrocarbon自闭铰链
self closing hinges可拆卸冷凝器单元
removable cond. unit圆角边缘
rounded corner edges可拆卸垫圈
gasket detachable冲压成型后门
pressformed rear door顶部安装蒸发器
top mounted evaporator定制方案
OPTIONS ON DEMAND远程冷凝器装置
remote condenser unit门锁
lockfor door不锈钢背面
SS rear side穿孔层架
perforated shelves玻璃门
glass doors挂肉杆
barsfor meat90毫米腿
90 mm legs脚轮
castors碳氢化合物替代气体
hydrocarbon alternative gases电压和频率
voltage and frequency



型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-CFG620 F	0 ~+10°C	620	1980	760	2	500	220v50hz	R290/R404A	280
HR-CFG620 R	-5~-20°C	620	1980	760	2	500	220v50hz	R290/R404A	350

技术和结构特性如有变化，恕不另行通知

- AISI-304不锈钢外壳，背面镀锌板
- AISI-304不锈钢内饰，冲压底部和圆角
- AISI-304不锈钢内边，22个用于GN 2/1的压制成型支架
- GN 1/1容器或层架
- 门内侧采用冲压钢
- 带有自动关闭系统、阻塞开口、磁性垫圈和可改变开启方向的门
- 标准为钥匙锁
- LED照明
- 由塑钢制成的强化GN 2/1货架
- AISI-304可调节支腿，135至200毫米
- 铰链式前控制面板
- 风扇辅助冷凝器单元
- 风扇辅助蒸发器，带环氧防腐涂层
- 门打开时蒸发器风扇停止
- 除霜水自动蒸发
- 40 Kg/m³密度聚氨酯，零GWP和零ODP
- 75毫米周边绝缘
- 数字温度控制、优化除霜、开门和高温冷凝警报。有效管理能源消耗
- 工作环境温度AGR 40° CACG 32°C


We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 22 press-formed supports for GN 2/1
- GN 1/1 containers or shelves
- Inner side of doors by stamped steel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- LED lighting
- Reinforced GN 2/1 shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Hinged front control panel
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane, zero GWP and zero ODP
- 75 mm perimetral insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption- Operating ambient temperature AGR 40° CACG 32°C



AGR-751-PF

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
220V 50Hz / 110V 60Hz	220V 50Hz / 110V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

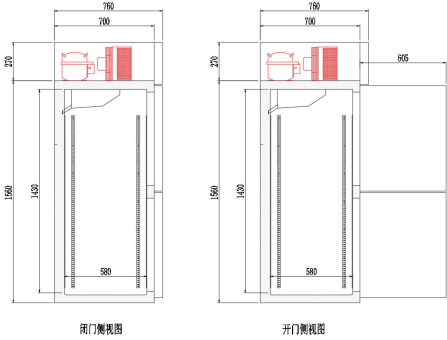



型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	(°C)	(mm)	(mm)	(mm)	(pc)	(L)			W
HR10CFB	0 ~+10	1220	1980	760	6	1000	220v50hz	R290/R404A	560
HR10CFL	-5~-20	1220	1980	760	6	1000	220v50hz	R290/R404A	580
HR10CFS	0 ~+10 & -5~-20	1220	1980	760	4	1000	220v50hz	R290/R404A	800


技术和结构特性如有变化，恕不另行通知

- AISI-304不锈钢外壳，背面镀锌板
- AISI-304不锈钢内饰，冲压底部和圆角
- AISI-304不锈钢内边，22个用于GN 2/1 - GN 1/1容器或层架的压制成型支架
- 门内侧采用冲压钢
- 带有自动关闭系统、阻塞开口、磁性垫圈和可改变开启方向的门
- 标准为钥匙锁
- 由塑料制成的强化GN 2/1货架
- AISI-304可调节支腿，135至200毫米
- 铰链式前控制面板
- 风扇辅助冷凝器单元
- 风扇辅助蒸发器，带环氧防腐涂层
- 门打开时蒸发器风扇停止
- 除霜水自动蒸发
- 40 Kg/m³密度聚氨酯，零GWP和零ODP
- 75毫米周边绝缘
- 数字温度控制、优化除霜。有效管理能源消耗
- 工作环境温度AGR 40° CACG 32°C

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 22 press-formed supports + slides for GN 2/1 - 1/1 containers or shelves
- Inner side of doors by stamped steel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Reinforced GN 2/1 shelves made of plasticized steel
- AISI -304 adjustable legs, 135 to 200 mm
- Hinged front control panel
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane, zero GWP and zero ODP
- 75 mm perimetral insulation
- Digital temperature control, optimized defrost. Efficient management of energy consumption

定制方案	Customized Solution	\$
门锁	Glass door lock	\$5
更换制冷剂	Refrigerant replacement	consult
更换成玻璃门	Change to glass door	\$/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色	Other exterior or interior color	consult
定做尺寸	Customized size	consult

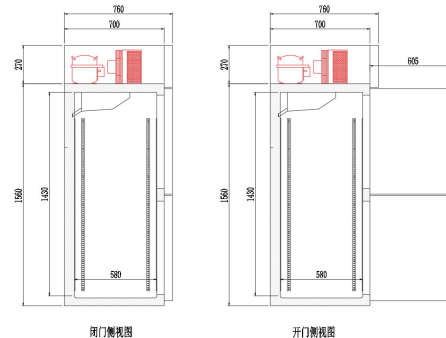



型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	evaporadores	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)	evap. shelves	(L)			W
HR-CFG1810 F	0 ~+10℃	1820	1980	760	6	1600	220v50hz	R290/R404 A	780
HR-CFG1810 R	-5~-20℃	1820	1980	760	6	1600	220v50hz	R290/R404 A	860
HR-CFG1810 F/R	0 ~+10℃ -5~-20℃	1820	1980	760	6	1600	220v50hz	R290/R404 A	1300


技术和结构特性如有变化，恕不另行通知

- AISI-304 不锈钢外壳，背面镀锌板
- AISI-304 不锈钢内饰，冲压底部和圆角
- 带有自动关闭系统、阻塞开口、磁性垫圈和可改变开启方向的门
- 标准为钥匙锁
- LED 照明
- 由塑料制成的强化 GN 2/1 货架
- AISI-304 可调节支腿，135 至 200 毫米
- 可升降控制面板
- 风扇辅助冷凝器单元
- 风扇辅助蒸发器，带环氧防腐涂层
- 门打开时蒸发器风扇停止
- 除霜水自动蒸发
- 40 kg/m³ 密度聚氨酯，零 ODP 和 GWP
- 75 毫米周边绝缘
- 数字温度控制、优化除霜、开门和高温冷凝报警。有效管理能源消耗
- 工作环境温度 AGR 40°C CACG 32°C

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- Reinforced GN 2/1 shelves made of plasticized steel
- AISI-304 adjustable legs, 135 to 200 mm
- Liftable control panel
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxy anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane, zero ODP and GWP
- 75 mm perimetral insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating ambient temperature AGR 40°C CACG 32°C

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

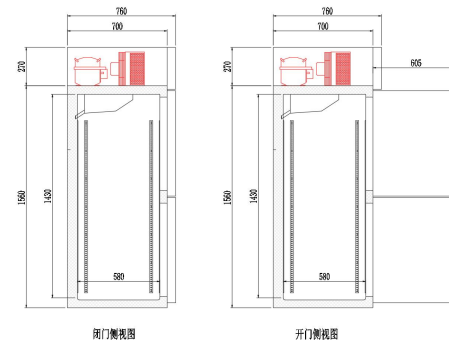

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HR-500L	0 ~+10℃	620	1980	760	2	500	220v50hz	R290/R404A	180
HR-500L	-5~-20℃	620	1980	760	2	500	220v50hz	R290/R404A	210
HR-1000L	0 ~+10℃	1210	1980	760	4	1000	220v50hz	R290/R404A	380
HR-1000L	-5~-20℃	1210	1980	760	4	1000	220v50hz	R290/R404A	450
HR-1000L	0 ~+10℃-5~-20℃	1210	1980	760	4	1000	220v50hz	R290/R404A	480
HR-1600L	0 ~+10℃	1810	1980	760	6	1600	220v50hz	R290/R404A	420
HR-1600L	-5~-20℃	1810	1980	760	6	1600	220v50hz	R290/R404A	650
HR-1600L	0 ~+10℃-5~-20℃	1810	1980	760	6	1600	220v50hz	R290/R404A	680


技术和结构特性如有变化，恕不另行通知
型号750和1000: 压制成型侧面
型号2000: 架子 + 不锈钢滑轨

- AISI-304 不锈钢外壳，后侧镀锌板
- AISI-304 不锈钢内饰，冲压底部和圆角 - 带自动关闭系统的门，封闭开口，磁性垫圈，可改变开启方向
- 标准钥匙锁
- AGRE: 双层玻璃门 + LED, ACGE: 三层玻璃门 + LED - 强化 GN 2/1 搁板由塑料制成
- AISI-304 可调节支腿，135 至 200 毫米
- 可升降控制面板
- 风扇辅助冷凝器装置
- 风扇辅助蒸发器，带环氧防腐涂层
- 门打开时蒸发器风扇停止
- 除霜水自动蒸发
- 40 公斤/立方米密度聚氨酯，零ODP和GWP
- 75毫米周边绝缘
- 数字温度控制、优化除霜、开门和高温冷凝警报。有效管理能源消耗
- 工作温度 32°C 环境温度

We reserve the right to change specifications without prior notice.
750 and 1000: pressformed sides
2000: racks + SS slides

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- AGRE: Double glazed door + LED, ACGE: Triple glazed door + LED
- Reinforced GN 2/1 shelves made of plasticized steel
- AISI-304 adjustable legs, 135 to 200 mm
- Lfhtable control panel
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane, zero ODP and GWP
- 75 mm perimetral insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 32°C ambient

定制方案	Customized Solution	\$
门锁	glass door lock	\$5
更换制冷剂咨询	Refrigerant replacement	consult
玻璃门加热	Heated glass door	\$35/door
自动蒸发水	Automatic evaporation of water	\$25
两侧加贴纸	Add stickers on both sides	\$20/set
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	consult
其他外观或内饰颜色咨询	other exterior or interior color	consult
防撞条咨询	bumpers	consult

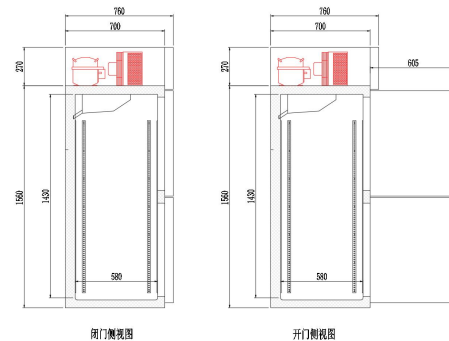

闭门侧视图

开门侧视图



HR-1600L



HR-1000L



HR-500L



HRNS-AF05L2



HRNS-AF10L4



型号mod.	温度范围	长度	高度	宽度	层架	容量	功率
	Temp range	length	height	depth	shelves	capacity	power
	℃	(mm)	(mm)	(mm)		(L)	w
HRNS-AF05L2	-25	620	830	2000	14	470	425
HRNS-AF10L4	-25	1220	830	2000	28	1000	610
HRNS-AF16L6	-25	1820	830	2000	42	1600	915

定制方案	Customized Solution	\$
门锁	glass door lock	
更换制冷剂咨询	Refrigerant replacement	
定制尺寸长宽高	Customized size	
自动蒸发水	Automatic evaporation of water	
两侧加贴纸	Add stickers on both sides	
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	
定制304不锈钢	Customized 304 stainless steel	



HRNS-AF05L2



HRNS-AF05L2




HRNS-AF05L2

技术和结构特性如有变化，恕不另行通知。


- AISI-201内外不锈钢外壳
- AISI-201不锈钢内饰，冲压底部和圆角
- 门带有自动关闭系统、磁性垫圈自动磁吸自动回弹关门
- 发泡层不锈钢保温门
- 不锈钢层架可容纳 60x40层架、容器或托盘
- 可调节温控控制面板
- 风扇辅助冷凝器装置
- 风扇辅助蒸发器，带环氧防腐涂层
- 门打开时蒸发器风扇停止
- 自动除霜功能
- 40 Kg/m³ 密度聚氨酯，零ODP和GWP
- 数字温度控制、优化自动除霜、高温冷凝警报
- 工作环境温度32° C

We reserve the right to change specifications without prior notice.

- AISI-201 stainless steel outer shell.
- AISI-201 stainless steel interior, stamped bottom and rounded corners
- The door is equipped with an automatic closing system, magnetic gasket, automatic magnetic suction, and automatic rebound closing
- Foam layer stainless steel insulation door.
- Stainless steel shelves can accommodate 60x40 shelves, containers, or trays
- Adjustable temperature control panel
- Fan assisted condenser device
- Fan assisted evaporator with epoxy anti-corrosion coating
- The evaporator fan stops when the door is opened
- Automatic defrosting function
- 40 Kg/m³ Density polyurethane, zero ODP and GWP
- Digital temperature control, optimized automatic defrosting, high temperature condensation alarm.
- Working environment temperature 32 ° C

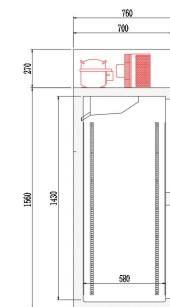

开门侧视图

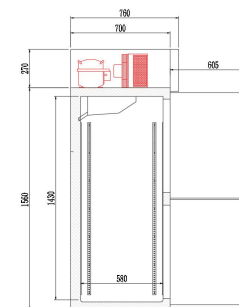

开门侧视图






HRMFE-150



HRMFE-200



可将门改为双抽屉组、可拆卸伸缩不锈钢滑轨、缓冲系统的升级

Increase of price by changing door to double drawers set, detachable telescopic SS runners, soft-closing system

报价不含色拉盘和隔板
GN containers and dividers NOT included in price


型号 mod.	range °C	length (mm)	height (mm)	depth (mm)	GN supports	shelves	slides sets	capacity (L)	voltage	refrigerant	frig. power W	power W
HRMFE-150	0°C +18°C	1345	850	700	4	2	2	255	230V/50Hz	R410 R290	304 502	322 264
HRMFE-200	0°C +18°C	1795	850	700	6	3	3	399	230V/50Hz	R410 R290	485 845	511 490

技术和结构特性如有变化，恕不另行通知


- 不锈钢外壳，背面镀锌板
- 不锈钢内饰，冲压底部和圆角
- 带有自动回弹关门、阻塞开口、磁性垫圈和可改变开启方向的门
- 门内侧采用冲压钢
- AISI-201 不锈钢工作台，可容纳色拉盘，带铰链不锈钢盖
- 搁板由钢化钢丝制成，高度可通过不锈钢滑轨调节
- AISI-304 可调节支腿，135 至 210 毫米
- 可拆卸和风扇辅助的冷凝器装置
- 风扇辅助蒸发器，带环氧防腐涂层。
- 除霜水自动蒸发
- 40 Kg/m³ 密度聚氨酯保温材料，零 ODP 和 GWP
- 数字温度控制，优化除霜，高温冷凝报警。有效管理能源消耗
- 工作温度 32°C 环境温度

We reserve the right to change specifications without prior notice.

- stainless steel exterior, rear side galvanized panel
- stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-201 stainless steel worktop, capacity for GN containers (see detail) with hinged stainless steel lid
- Shelves made of plasticized steel wire, height adjustable by stainless steel slides
- AISI-304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxy anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 32°C ambient

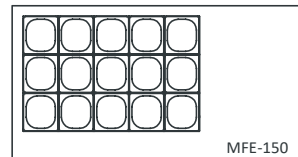


MFE-150

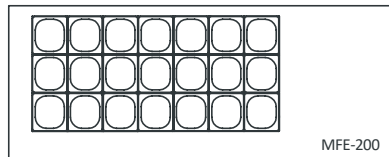

MFE-200

定制方案	OPTIONS
用于工作台的附加色拉盘分隔型材	additional GN-divider profile for worktop
附加的GN-1/1层架	additional shelf GN-1/1
附加的GN-1/1滑轨组	additional set GN-1/1 slides
不锈钢门锁	SS door lock
右置机组	left side motor
4个轮子一组	set 4 wheels
6个轮子一组	set 6 wheels
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
HACCP许可	HACCP
	consult

工作台面、容器配件和盖子均可定制。
Worktops, container fits and covers, can be customized.

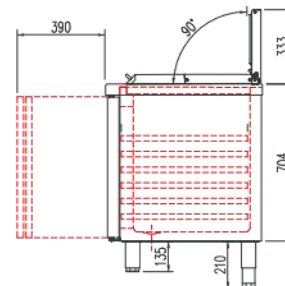

HRMFE-200



定制门锁

locks on demand



定制方向轮

castors on demand



定制双抽屉

double drawers on demand



定制双风扇蒸发器

double fan evaporator





	将门改为双抽屉组、可拆卸伸缩不锈钢滑轨、缓冲系统都会提高价格	Increase of price by changing door to double drawers set, detachable telescopic SS runners, soft-closing system	Gama 60	Gama 70
--	--------------------------------	---	---------	---------

报价不含色拉盘和隔板
GN containers and dividers NOT included in price

型号mod.	温度范围 range °C	长度 length (mm)	高度 height (mm)	宽度 depth (mm)	层架 shelves	滑轨组 slides sets	色拉盘数量 GN capacity 1/4	容量 capacity (L)	电压 voltage	制冷剂 refrigerant	制冷功率 frig. power W	功率 power W
MFEI60-150	0°C +8°C	1495	850	600	2	0	8	245	230V-50Hz	R134a* R290	304 502	322 764
MFEI60-200	0°C +8°C	2020	850	600	3	0	12	380	230V-50Hz	R134a* R290	485 845	511 490
MFEI70-135	0°C +8°C	1345	850	700	2	2	8	255	230V-50Hz	R134a* R290	304 502	322 764
MFEI70-180	0°C +8°C	1795	850	700	3	3	10	399	230V-50Hz	R134a* R290	485 845	511 490
MFEI70-225	0°C +8°C	2245	850	700	4	4	13	543	230V-50Hz	R134a* R290	485 845	511 490
MFEI70-270	0°C +8°C	2695	850	700	5	5	16	686	230V-50Hz	R134a* R290	485 845	567 490

技术和结构特性如有变化，恕不另行通知。

- MFEI60 钢化钢线内架，高度可调
- MFEI70 钢化钢线制成的GN1/1层架，高度可调


- AISI-304 不锈钢外壳，后侧镀锌板
- AISI-304 不锈钢内饰，冲压底部和圆角
- 带自动关闭系统的门，封闭开口，磁性密封圈，可改变开启方向
- 门内侧采用冲压钢
- 不锈钢工作台，带锁边盖的集成顶部装置
- GN 1/4-150 顶部装置
- 135-210 毫米高度可调的不锈钢管脚
- 风扇辅助冷凝器装置 y extraible
- 风扇辅助蒸发器，带环氧防腐涂层
- 除霜水自动蒸发
- 注射聚氨酯，密度40公斤/立方米，零ODP和GWP影响
- 数字温度控制、优化除霜、开门和高温冷凝警报，能源消耗高效管理
- 工作环境温度32° C

台面、碗罩和盖子均可定制。
Worktops, container fits and covers, can be customized.

We reserve the right to change specifications without prior notice.

- MFEI60 shelves made of plasticized steel wire, height adjustable
- MFEI70 GN 1/1 shelves made of plasticized steel wire, height adjustable

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Stainless steel worktop, integrated topping unit with inged lid,
- GN 1/4-150 topping unit
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 32°C ambient

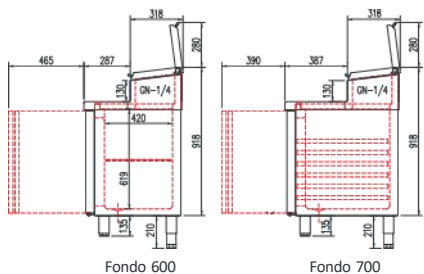

按需门锁
locks on demand



按需脚轮
castors on demand



按需双抽屉
double drawers on demand



双风扇蒸发器
double fan evaporator



MFEI60-150
8xGN 1/4-150



MFEI60-200
12xGN 1/4-150



MFEI70-135
8xGN 1/4-150



MFEI70-180
10xGN 1/4-150



MFEI70-225
13xGN 1/4-150



MFEI70-270
16xGN 1/4-150






HRMFEI70-180-1/6

HRMFEI70-225-1/6

HRMFEI70-270-1/6



将门改为双抽屉组、可拆卸伸缩不锈钢滑轨、缓冲系统都会提高价格

Increase of price by changing door to double drawers set, detachable telescopic SS runners, soft-closing system

报价不含色拉盘和隔板
GN containers and dividers NOT included in price


型号mod.	range °C	length (mm)	height (mm)	depth (mm)	shelves	slides sets	GN capacity 1/6	capacity (L)	voltage	refrigerant	frig. power W	power W
HRMFEI70-180	0°C +8°C	1795	850	700	3	3	10	399	230V/50Hz	R134a*	485	511
										R290	1004	614
HRMFEI70-225	0°C +8°C	2245	850	700	4	4	13	543	230V/50Hz	R134a*	485	511
										R290	845	490
HRMFEI70-270	0°C +8°C	2695	850	700	5	5	16	686	230V/50Hz	R134a*	485	567
										R290	845	490

技术和结构特性如有变化，恕不另行通知。

- 不锈钢外壳，后侧镀锌板
- 不锈钢内饰，冲压底部和圆角
- 带有自动回弹关门、阻塞开口、磁性垫圈和可改变开启方向的门
- 门内侧采用冲压钢
- 不锈钢托盘，内置配料展示器和可折叠不锈钢外壳
- 搁板由塑化钢丝制成，高度可通过不锈钢滑轨调节
- GN 1/1钢丝内架，关于高度可调的不锈钢导轨
- AISI -304 可调节支腿，135 至 210 毫米
- 可拆卸和风扇辅助的冷凝器装置
- 风扇辅助蒸发器，带环氧防腐涂层
- 除霜水自动蒸发
- 40公斤/立方米密度聚氨酯，零ODP和GWP
- 数字温度控制、优化除霜、开门和高温冷凝报警，能源消耗高效管理
- 工作环境温度32°C

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- AISI-304 stainless steel worktop, raised topping well with hinged lid
- GN 1/4-150 topping unit
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 32°C ambient



台面、碗罩和盖子均可定制。工作台面、容器配件和盖子均可定制。
Worktops, container fits and covers, can be customized.

门锁定制
locks on demand



脚轮定制
castors on demand



双抽屉定制
double drawers on demand




双风扇蒸发器
double fan evaporator



HRMFEI70-225-1/6

定制抽屉

optimal drawers

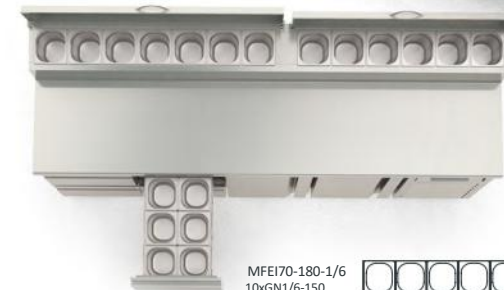MFEI70-180-1/6
10xGN1/6-150MFEI70-225-1/6
13xGN1/6-150MFEI70-270-1/6
16xGN1/6-150



HRMR80-160

HRMR80-210

HRMR80-265

报价包含顶层装置 - *Topping unit included in price*
 报价不含色拉盘和隔板 - *GN containers NOT included in price*

型号 mod.	range	length	height	depth	shelves	slides sets		capacity		voltage	refrigerant	frig. power	potencia
	°C	(mm)	(mm)	(mm)		neutral containers	refrigerated containers	(L)				W	power W
HRMR80-160	0°C +8°C	1565	850	800	0	8	3	3	362	230V-50Hz	R134a*	178	211
											R290	502	235
HRMR80-210	0°C +8°C	2090	850	800	0	13	3	3	562	230V-50Hz	R134a*	245	249
											R290	502	238
HRMR80-265	0°C +8°C	2615	850	800	0	18	3	3	761	230V-50Hz	R134a*	304	289
											R290	845	490

技术和结构特性如有变化，恕不另行通知。


- AISI-304不锈钢外壳，后侧镀锌板
- AISI-304 不锈钢内部，带弧形边缘可逆开启门，带自动关闭系统和磁性挡风雨条（打开度超过 90° 时保持打开状态）
- 深冲不锈钢百叶窗
- 花岗岩台面，带后围兜和 180 mm 侧面
- 内部带有不锈钢导轨，烤架高度可调，托盘或容器 60x40x7（提供 4 个）
- 中性抽屉，带 3 个 60x40x7 容器不锈钢管脚，高度可调 135 - 210 mm
- 通风和可拆卸冷凝装置强制通风蒸发器，带防腐环氧涂层
- 除霜水自动蒸发
- 注塑聚氨酯保温材料，密度 40 Kg/m³，零ODP 和 GWP 效应
- 数字温度控制，优化除霜，报警冷凝温度高。有效管理消耗能源独立成分显示，GN 1/4 容量，包括工作温度：32°C环境温度
- 数字温度控制，优化下载，冷凝温度报警器。高效能耗管理
- 工作温度在3摄氏度的环境

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Granite working surface with 180 mm upstands
- Interior with stainless steel slides, height adjustable, capacity for 60x40 shelves, trays or containers (4 as standard)
- Neutral drawer with three 60x40x7 containers as standard
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- GN 1/4 topping unit, included
- Operating temperature 32°C ambient



MR80-210

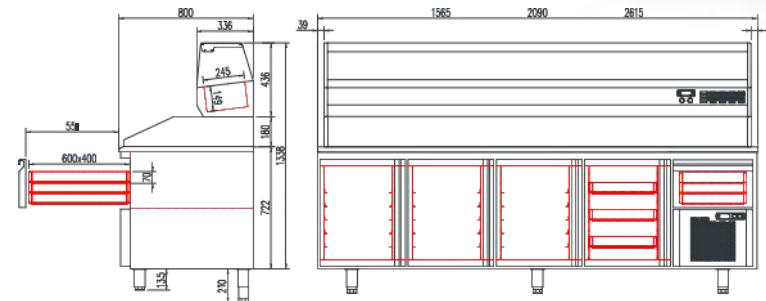



	将门改为双抽屉组、可拆卸伸缩不锈钢滑轨、缓冲系统都会提高价格 <i>Door to double drawers set, soft-closing system, increase of price</i>	
--	---	--

型号 mod.	range	length (mm) (inch)	depth (mm) (inch)	GN supports	shelves uds	worktop GN1/6-100	capacity (l)	voltage	refrigerant	frig. power W	power W
HRSDT-27-8	0" C +8°C	32°F 27 1/5	701 32 1/8	805 32 1/8	1	2	8	204	230V-50Hz R134a* R290	304 502	343 264
HRSDT-48-12	0" C +8°C	32°F 48 1/3	1228 48 1/3	805 32 1/8	1	4	12	394	230V-50Hz R134a* R290	336 502	286 725
HRSDT-60-16	0" C +8°C	32°F 60 1/16	1532 60 1/16	805 32 1/8	1	4	16	500	230V-50Hz R134a* R290	485 845	455 929
HRSDT-72-18	0" C +8°C	32°F 72 1/8	1837 72 1/8	805 32 1/8	1	6	18	606	230V-50Hz R134a* R290	540 845	470 935

技术和结构特性如有变化，恕不另行通知。

- 外部和内部采用钢制设计，靠背采用镀锌金属板可逆开启门，带自动关闭系统和挡风雨条
磁性（打开角度高于 90° 时保持打开状态）
AISI 304 不锈钢台面，带可拆卸聚乙烯板，白色
内部钢制地板，高度可调
工作台上的 GN 铲斗容量
AISI-304 不锈钢屋顶，绝缘，可折叠桶式外壳
- 内部钢丝层架，高度可调
标准车轮（2 个带制动器 + 2 个不带制动器）
通风冷凝机组
强制通风蒸发器，带防腐环氧涂层
除霜水自动蒸发
注塑聚氨酯保温材料，密度 40 Kg/m³，GWP 为零，零 ODP 效应
数字温度控制，优化除霜，高报警
冷凝温度。高效的能耗管理

We reserve the right to change specifications without prior notice.

- Stainless steel interior and exterior, rear side galvanized panel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AISI-304 stainless steel worktop, with detachable white polyethylene table
- Shelves made of plasticized steel wire, height adjustable
- GN capacity in the worktop
- AISI 304 stainless steel lid, isolated and hinged
- Shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP effect
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption




HRSDT-72-18

con cajonera opcional

with optional drawer set

定制方案	OPTIONS
encimera con peto	worktop with splash-back
set 4 patas	set 4 legs
set 6 patas	set 6 legs
HACCP 警报记录仪	HACCP alarm recorder
48° 铰链面	SS rear side
	trapezoidal 43° C
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz

Puertas con doble bisagra y burlete desmontable
Double hinged doors and detachable gasket



HRSDT-60-16

Capacidad - GN 1/6-100 - Capacity

SDT-27-8



SDT-48-12



SDT-60-16



SDT-72-18



SDT-27-8



	将门改为双抽屉组、可拆卸伸缩不锈钢滑轨、缓冲系统都会提高价格	
	Door to double drawers set, soft-closing system, increase of price	

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	evaporadores	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)	evap. shelves	(L)			W
HR-GZT620 S	0 ~+10°C	620	800/950	760	1		220v50hz	R290	
HR-GZT1200 S	0 ~+10°C	1200	800/950	760	2	274	220v50hz	R290	
HR-GZT1500 S	0 ~+10°C		800/950	760	2	381	220v50hz	R290	
HR-GZT1800 S	0 ~+10°C	1800	800/950	760	3	488	220v50hz	R290	

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 钢质外壳和内壳，镀锌板支撑
- 可逆开口门，带自动关闭系统和磁性开关（打开度超过90°时保持打开）- AISI 304 不锈钢台面，带可拆卸聚乙烯板，白色
- 内搁板由塑料涂层钢丝制成，高度可调
- 工作台上的 GN 容量
- AISI-304 不锈钢屋顶，绝缘，可折叠桶式外壳
- 内部钢丝屋苑，高度可调
- 标准车轮（2 个带制动器 + 2 个不带制动器）
- 通风冷凝机组
- 带防腐环氧涂层的强制拔风蒸发器
- 除霜水自动蒸发
- 注射聚氨酯绝缘材料，密度 40 Kg/m³，零 GWP 和零 ODP 效应
- 数字温度控制，优化除霜，高报警
- 冷藏温度。高效的能耗管理
- 工作温度：0°C +8°C 至 38°C 环境温度

- Stainless steel interior and exterior, rear side galvanized panel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AISI-304 stainless steel worktop, with detachable white polyethylene table
- Shelves made of plasticized steel wire, height adjustable
- GN capacity in the worktop
- AISI 304 stainless steel lid, isolated and hinged
- Shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP effect
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature 0°C +8°C, 38°C ambient




with optional drawer set



Double hinged doors




定制方案	OPTIONS
防溅台面	worktop with splash-back
4个台脚1组	set 4 legs
6个台脚1组	set 6 legs
HACCP警报记录仪	HACCP alarm recorder
不锈钢背面板	SS rear side
43°C耐热	tropicalized 43 ° C
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz




SDTP-60-24



Capacidad - GN 1/6-100 - Capacity



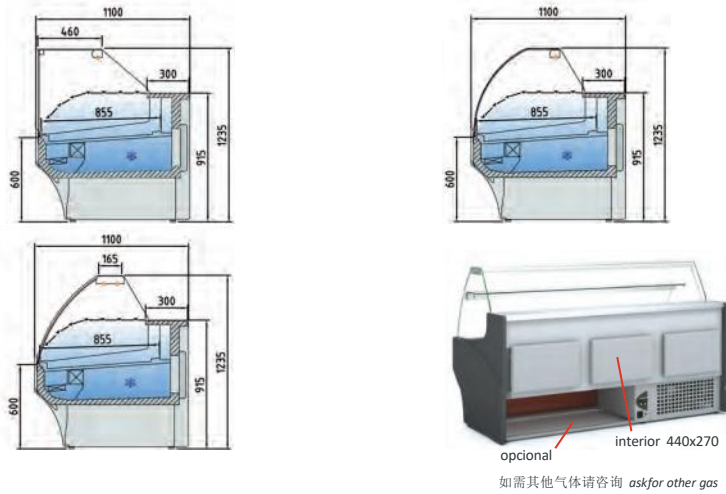

mod.	温度范围	长度	高度	深度	层架	容量	电压频率	制冷剂	功率
	range	length	height	depth	evaporadores	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)	evap. shelves	(L)			W
RG-15C	2-8°C	1500	920	1180	0	100	220v50hz	R22	733
RG-20C	2-8°C	2000	920	1180	0	150	220v50hz	R22	825
RG-25C	2-8°C	2500	920	1180	0	190	220v50hz	R22	1180
RG-30C	2-8°C	3000	920	1180	0	230	220v50hz	R22	1475


技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 内外均为彩钢喷涂板材，黑白款同价
 - 展示区和柜台采用不锈钢 AISI-304
 - 光滑的展示区平台
 - 40毫米侧面采用注塑 ABS，木质装饰除外
 - 标准装饰：深灰色短边灰色正面+蓝色装饰条
 - 阳极氧化铝型材
 - 前橡胶保险杠
 - 钢化弧形玻璃铰链向前
 - 标准 LED 4000K 照明：顶部工作台
 - 可选 2700K LED（柔光）或鲜红，价格相同
 - 40 Kg/m³ 密度聚氨酯保温材料，零 ODP 和 GWP
 - 带门冷藏库 440x270 免费（常温型号除外）
 - 通风蒸发器，静态可选，标配环氧防腐处理
 - 标配通风冷凝和自动蒸发（仅限带冷凝器装置的型号）
 - 电子温度控制器
 - 外部温度计
 - 自动除霜，可选配加热带
 - 气候等级 4 (30°C 55%) M1
- M1 产品温度 -1/+5°C UNE-EN ISO 23953-2:2015

- Interior and exterior finish in plastic coated steel
 - Display area and counter in stainless steel AISI-304
 - Smooth deck for display area
 - 40 mm sides in injected ABS, except wood decor
 - **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
 - Anodised aluminium profiles
 - Front rubber bumper
 - Toughened curved glass hinges forward
 - Standard LED 4000K lighting: top worktop
 - Optional 2700K LED (soft light) or Fresh red, same price
 - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
 - Refrigerated under storage with doors 440x270 free (except for ambient models)
 - **Ventilated evaporator, static as optional**, with anticorrosion EPOXY treated as standard
 - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
 - Electronic temperature controller
 - External thermometer
 - Auto defrost, by heated cable as optional
 - Climate class 4 (30°C 55%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2015



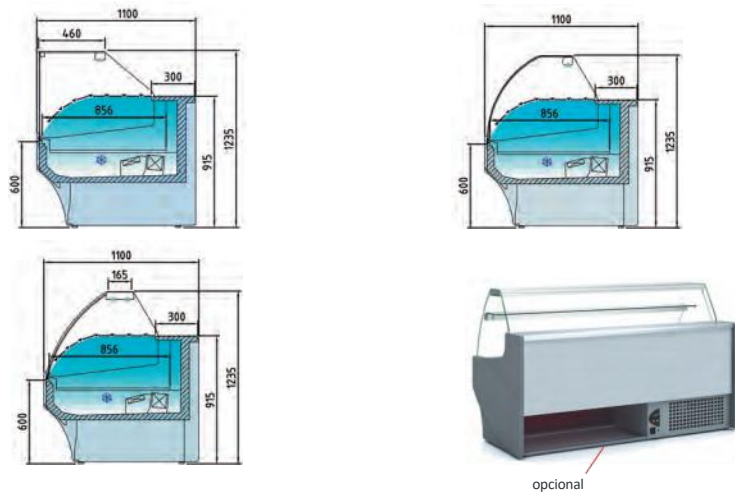

如需其他气体请咨询 ask for other gas



技术和结构特性如有变化, 恕不另行通知。

- 塑料涂层钢的内部和外部饰面
- AISI-304 不锈钢展示区和柜台
- 展示区的光滑台面
- 40 mm 侧面, 注入 ABS, 除木质装饰外
- 标准装饰: 短款深灰色侧面灰色正面+蓝色装饰条纹
- 前橡胶保险杠
- 钢化曲面玻璃铰链向前
- 标准 LED 4000K 照明: 顶部工作台
- 可选 2700K LED (柔光) 或鲜红色, 价格相同
- 40 Kg/m³ 密度聚氨酯保温, ODP 和 GWP 为零
- 冷藏储存, 门 440x270 免费 (环境型号除外)
- 通风蒸发器, 可选静态, 经防腐环氧树脂处理作为标准
- 标配通风冷凝和自动蒸发 (仅适用于型号带冷凝器单元)
- 电子温度控制器
- 外部温度计
- 自动除霜
- 气候等级 4 (30°C 55%) M1


M1 产品温度 -1/+5°C UNE-EN ISO 23953-2:2015



We reserve the right to change specifications without prior notice.

- Interior and exterior finish in plastic coated steel
 - Display area and counter in stainless steel AISI-304
 - Smooth deck for display area
 - 40 mm sides in injected ABS, except wood decor
 - Standard decoration:** short dark gray sides gray front+ blue decorative stripe
 - Front rubber bumper
 - Toughened curved glass hinges forward
 - Standard LED 4000K lighting: top worktop
 - Optional 2700K LED (soft light) or Fresh red, same price
 - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
 - Refrigerated under storage with doors 440x270 free (except for ambient models)
 - **Ventilated evaporator, static as optional**, with anticorrosion EPOXY treated as standard
 - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
 - Electronic temperature controller
 - External thermometer
 - Auto defrost
 - Climate class 4 (30°C 55%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2015





mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	(°C)	(mm)	(mm)	(mm)	(pc)	(L)			(W)
HR-15XR	2-8	1500	900	1120	0	100	220v50hz	R22	750
HR-20XR	2-8	2000	900	1120	0	150	220v50hz	R22	800
HR-25XR	2-8	2500	900	1120	0	190	220v50hz	R22	1200
HR-30XR	2-8	3000	900	1120	0	230	220v50hz	R22	1500

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 外部饰面采用塑料涂层钢
 - 不锈钢展示区和柜台
 - 光滑的展示区甲板
 - 40 毫米侧面采用注塑 ABS
 - 自助服务前玻璃
 - CVEE: 标准 LED 4000K 照明: 顶部工作台和架子
 - 可选 2700K LED (柔光) 或鲜红, 价格相同
 - 40 Kg/m³ 密度聚氨酯保温材料, 零 ODP 和 GWP
 - 标配通风冷凝和自动蒸发 (仅限带冷凝器装置的型号)
 - 电子温度控制器
 - 外部温度计
 - 自动除霜
 - 气候等级 3 (25°C 60%) M1
- M1 产品温度 -1/+5°C UNE-EN

- Exterior finish in plastic coated steel
 - Display area and counter in stainless steel
 - Smooth deck for display area
 - 40 mm sides in injected ABS
 - Self-service frontal glass
 - CVEE: Standard LED 4000K lighting: top worktop and shelf
 - Optional 2700K LED (soft light) or Fresh red, same price
 - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
 - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
 - Electronic temperature controller
 - External thermometer
 - Auto defrost
 - Climate class 3 (25°C 60%) regime M1
- M1 product temperature -1/+5°C UNE-EN


Ventilated evaporator, with anticorrosion EPOXY treated as standard

定制方案	Customized Solution	
加装滑动门	Add sliding door	
更换制冷剂	Refrigerant replacement	
220V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz	
自动蒸发水	Automatic evaporation of water	
其他外观或内饰颜色	Other exterior or interior color	
防撞条	bumpers	



CVEA-9-20 customized 定制款




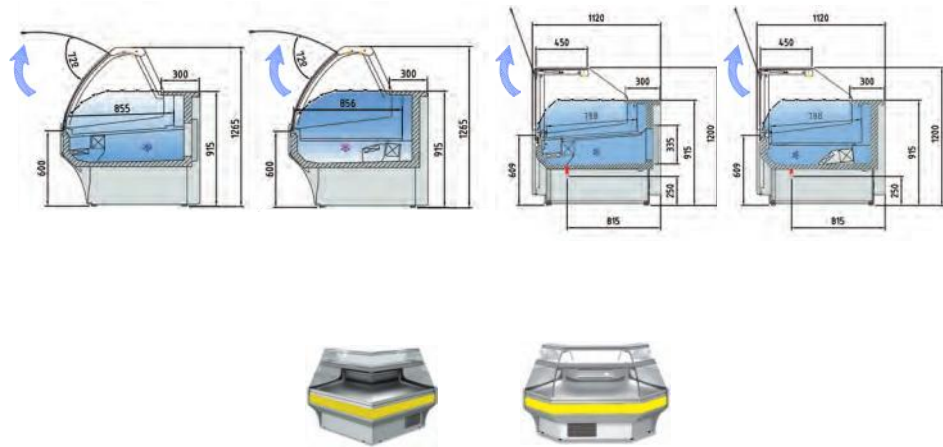


技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 塑料涂层钢的内部和外部饰面
 - AISI-304不锈钢展示区和柜台
 - 展示区的光滑甲板
 - 40 mm侧面，注入ABS，除木质装饰外
 - 标准装饰：短款深灰色侧面灰色正面+蓝色装饰条纹
 - 阳极氧化铝型材
 - 前橡胶保险杠
 - 自助式正面玻璃
 - CVEE：标准LED 4000K照明：顶部工作台和搁板
 - 可选2700K LED（柔光）或鲜红色，价格相同
 - 40 Kg/m³密度聚氨酯保温，ODP和GWP为零
 - 标配通风冷凝和自动蒸发（仅限带冷凝器的型号）
 - 电子温度控制器
 - 外部温度计
 - 自动除霜
 - 气候等级3（25°C 60%）M1
- M1产品温度-1/+5°C UNE-EN ISO 23953-2:2015

- Interior and exterior finish in plastic coated steel
 - Display area and counter in stainless steel AISI-304
 - Smooth deck for display area
 - 40 mm sides in injected ABS, except wood decor
 - **Standard decoration**: short dark gray sides gray front+ blue decorative stripe
 - Anodised aluminium profiles
 - Front rubber bumper
 - Self-service frontal glass
 - **CVEE**: Standard LED 4000K lighting: top worktop and shelf
 - Optional 2700K LED (soft light) or Fresh red, same price
 - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
 - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
 - Electronic temperature controller
 - External thermometer
 - Auto defrost
 - Climate class 3 (25°C 60%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2015



技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.


- 塑料钢板的外部 and 内部
- AISI-304 不锈钢展板和展台
- 平滑曝光平面盘
- 40毫米的ABS喷涂边框，木材除外
- 标准装饰: 深灰色短边框前灰色+蓝色装饰条。
- 阳极氧化铝镀铬饰条
- 正面的反击
- 柔软的前玻璃，可折叠和升降
- 数控器上的双LED 4000K照明
- 可选2700K LED(暖光)或ROSA，价格相同
- 注射聚氨酯绝缘材料，密度40千克/立方米，零耗氧潜能值和GWP效应
- 通风蒸发器，与系列EPOXY防腐处理-通风冷凝，系列自动蒸发(仅带内置电机)
- 电子温度控制
- 温度指示器
- 自动下载
- 气候等级4(三十度C55%)M1模式

M1产品温度-1/+5°C UNE-EN ISO 23953-2:2015


- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 40 mm sides in injected ABS, exceptd wood decor
- **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
- Anodised aluminium profiles
- Front rubber bumper
- Tempered and liftable front glass
- Double LED 4000K top lighting
- Optional 2700K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- **Ventilated evaporator** with epoxy anticorrosion cover as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost
- Climate class 4 (30°C 55%) regime M1


M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2015

REMOTE version, expansion valve (R449A) and solenoid valve, included



220v 60Hz / 115v 60Hz consular - consult



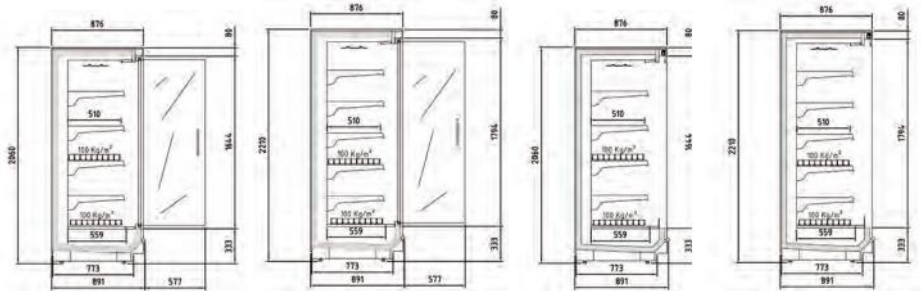

型号mod.	温度范围	长度	高度	宽度	层架	容量	电压频率	制冷剂	功率
	Temp range	length	height	depth	shelves	capacity	voltage	refrigerant	power
	°C	(mm)	(mm)	(mm)		(L)			W
HRFM15DM	2-8℃	1500	900	1980	4	1140L	220v50hz	R22	900w
HRFM20DM	2-8℃	2000	900	1980	4	1545L	220v50hz	R22	1500w
HRFM25DM	2-8℃	2500	900	1980	4	1955L	220v50hz	R22	2300w
HRFM30DM	2-8℃	3000	900	1980	4	2360L	220v50hz	R22	2300w
HRFM15FT	2-8℃	1500	1000	2100	4	1600L	220v50hz	R22	1500W
HRFM20FT	2-8℃	2000	1000	2100	4	2230L	220v50hz	R22	2300w
HRFM25FT	2-8℃	2500	1000	2100	4	2700L	220v50hz	R22	2700w
HRFM30FT	2-8℃	3000	1000	2100	4	2815L	220v50hz	R22	3000w


技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 1、直角风冷柜，风冷，2℃-8℃
- 2、松下压缩机，R22制冷剂，机组电压220V 50HZ。
- 3、箱体使用喷涂彩板，配4层层板，LED灯光，万向轮
- 4、蒸发器:纯铜+整体框架:1.8mm承重框架,1.2mm加重底座整机高密度加厚发泡保温板6cm厚
- 5、精创微电脑温控器+丹佛斯膨胀阀
- 6、LED-T8-3000KK磁吸式灯管
- 7、风道:单风道+圆形蜂窝+气道:全铜气道
- 8、顶部:出风口升级钨丝加热 11、夜幕帘:透明加厚减速拉帘，铝台金拉帘杆。
- 9、精准电子温控控制。

- 1、Right angle air curtain cabinet, air-cooled, 2 ° C-8 ° C
- 2、Panasonic compressor, R22 refrigerant, unit voltage 220V 50HZ.
- 3、The box is made of spray painted color plates, equipped with 4 layers of boards, LED lights, and universal wheels
- 4、Evaporator: pure copper+overall frame: 1.8mm load-bearing frame, 1.2mm weighted base, whole machine high-density thickened foam insulation board 6cm thick
- 5、Jingchuang microcomputer temperature controller+Danfoss expansion valve
- 6、LED-T8-3000KK magnetic suction lamp tube
- 7、Air duct: single air duct+circular honeycomb+air duct: all copper air duct
- 8、Top: Upgraded tungsten wire heating for air outlet
11. Night curtain: Transparent thickened deceleration sliding curtain, aluminum platform gold sliding curtain rod.
- 9、Accurate electronic temperature control.



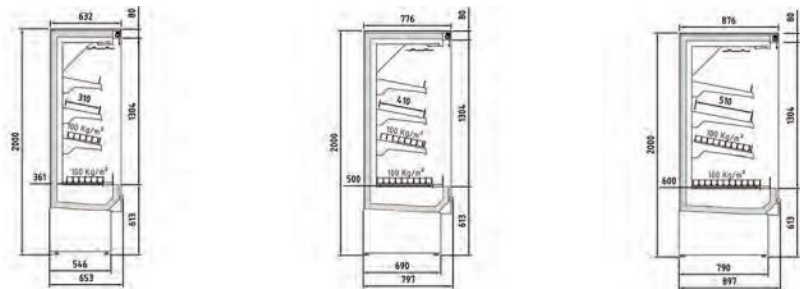

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 手动卷帘和隔层有机玻璃挡板
- 30毫米的边框，标准的灰色ABS，可选的密封垫价格
- 可选的全景边框(双玻璃)，价格增加-标准的外部装饰(下边框，顶部和侧面)
- 灰色RAL 7040-可选装饰，根据侧面，只有正面(上和下条)或整体可用的颜色选择。
- 内部白色RAL 9003-镜子在顶部和有机玻璃前顶在货架上，标准-带EPOXI
- 防腐涂层的通风蒸发器-高度和角度可调的支架，包括40毫米的托盘-自动蒸发盘的
- 蒸发器自然排出
- 机电风扇，可选电子风扇(咨询)
- 电子控制
- 24v4000k LED照明
- 产品温度，根据EN-ISO-23953:
- H1: +1*+10°C，适合水果和蔬菜
- 气候等级3(25摄氏度，60度)
- 预装型号采用R-449A电磁阀和膨胀阀，R-134a选项(请参阅其他制冷剂)
- 注射聚氨酯保温材料，密度40kg/m3在GWP和零ODP效应下
- 所有型号的管件是可选的(不包括标准)

- Manual night blind and and inferior exposition deck perspex
- 30 mm sides, standard in gray ABS, optional CLOSED at the same price
- Panoramic side (double glass) optional with price increase
- Standard exterior decoration (lower, upper and side stripes) in gray RAL 7040
- Optional decoration, depending on the sides, only front (upper and lower strip) or total to choose in the available colors. Interior in RAL 9003 white
- Mirror on the top and methacrylate front stop on the shelves, standard
- Ventilated evaporator EPOXY with anticorrosive coating
- Adjustable shelves in height and angle, with 40 mm price holders included
- Natural defrost of evaporator with automatic evaporation tray
- Electromechanic fans, on demand, electronics (consult)
- Electronic control
- 24v LED 4000k lighting
- Product temperature, according to EN-ISO-23953:
- H1: +1*+10°C, suitable for fruits and vegetables
- Climatic class 3 (25°C, 60 H.R)
- Pre-installation models incorporate solenoid and expansion valves in R-449A, option R-134a (consult other refrigerants)
- Injected polyurethane insulation, density 40kg/m3 low GWP and zero ODP effect
- The tube bumper is optional on all models (not included as standard)



CDS1 09 H1
Paragolpes y decoración exterior total, opcionales

Bumper and total exterior finishing, as extra




Lateral PLASTICO de serie
PLASTIC side as standard



Lateral CERRADO -LC
opcional
BLIND side -LC on demand



Lateral PANORÁMICO -LE
opcional
PANORAMIC side -LE on demand

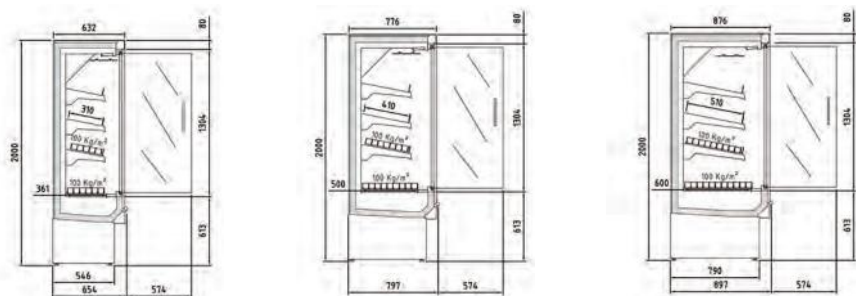

技术和结构特性如有变化，恕不另行通知。

We reserve the right to change specifications without prior notice.

- 无框架的门全玻璃正面，缩小丝网印刷，最大开度93度，手动开锁。具有耐用扭力棒的自动闭合，减少能源消耗
- 30毫米的边框，标准的灰色ABS，可选的密封垫价格
- 可选的全景边框(双玻璃)，价格增加-标准的外部装饰(下边框，顶部和侧面)RAL 7040油漆-可选装饰，根据侧面，只有正面(上和下条)或整体
- 可供选择的颜色。内部白色RAL9003-镜子在顶部和甲基丙烯酸酯前顶在货架上，标准-带EPOXY防腐涂层的通风蒸发器-高度和角度可调的支架，包括40毫米的货架
- 具有自动蒸发盘的蒸发器自然排出
- 机电风扇，可选电子风扇(咨询)
- 电子控制
- LED照明24v4000k
- 产品温度，根据EN-ISO-23953: H1: +1*+10°C，适合水果和蔬菜气候等级3(25摄氏度，60度)
- 预装型号采用R-449A电磁阀和膨胀阀，R-134a选项(请参阅其他制冷剂)
- 注射聚氨酯保温材料，密度40kg/m3，GWP和零ODP效应
- 所有型号的管件是可选的(不包括标准)

- Frameless hinged doors with complete glazed frontal with reduced serigraphy, max opening 93° with manual blocking closure. Self-closing with high durability torsion bar, ensure energy savings
- 30 mm sides, standard in gray ABS, optional CLOSED at the same price
- Panoramic side (double glass) optional with price increase
- Standard exterior decoration (lower, upper and side stripes) in gray RAL 7040
- Optional decoration, depending on the sides, only front (upper and lower strip) or total to choose in the available colors. Interior in RAL 9003 white
- Mirror on the top and methacrylate front stop on the shelves, standard
- Ventilated evaporator EPOXY with anticorrosive coating
- Adjustable shelves in height and angle, with 40 mm price holders included
- Natural defrost of evaporator with automatic evaporation tray
- Electromechanic fans, on demand, electronics (consult)
- Electronic control
- 24v LED 4000k lighting
- Product temperature, according to EN-ISO-23953: H1: +1*+10°C, suitable for fruits and vegetables
- Climatic class 3 (25°C, 60 H.R)
- Pre-installation models incorporate solenoid and expansion valves in R-449A, option R-134a (consult other refrigerants)
- Injected polyurethane insulation, density 40kg/m3 low GWP and zero ODP effect
- The tube bumper is optional on all models (not included as standard)

Exterior in RAL 9005 (black) plasticized included in the price. Other gases or voltages, consult



PLASTIC side as standard



CDG1 18 H1 - LE
Optionals bumper, PANORAMIC sides and exterior decoration



BLIND side - LC on demand



optional
PANORAMIC side - LE on demand