

Economic Models

Viva 60 (Pyramid shape)

Feature	AC
Suction (m ³ /hr)	750 ± 10%
Noise Level	<58 dB

➔ BIS on Full Chimney



Rave 60 / 90

Feature	AC	DC
Suction (m ³ /hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



Phoenix 60

Feature	AC
Suction (m ³ /hr)	1150 ± 10%
Noise Level	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



Jade T 60

Feature	AC	DC
Suction (m ³ /hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



Onyx 60

Feature	AC	DC
Suction (m ³ /hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass





MID PREMIUM RANGE

Mavis 60 / 90

Feature	AC	DC
Suction (m³/hr)	1800 ± 10%	1800 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



Von 60

Feature	AC	DC
Suction (m³/hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



Daisy 60

Feature	AC	DC
Suction (m³/hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



M3 60

Feature	AC	DC
Suction (m ³ /hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



M4 60

Feature	AC	DC
Suction (m ³ /hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



CUBE

Feature	AC	DC
Suction (m ³ /hr)	1050 ± 10%	1150 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass




AEGLE

Feature	AC	DC
Suction (m ³ /hr)	1050 ± 10%	1150 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass

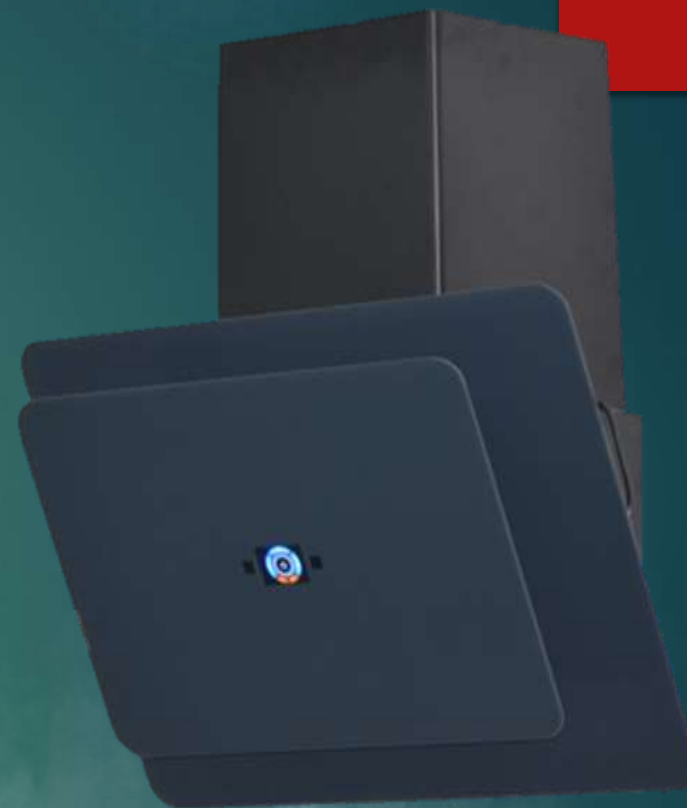

LILLY T

Feature	AC	DC
Suction (m ³ /hr)	1050 ± 10%	1150 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



LILLY PLUS

Feature	AC	DC
Suction (m ³ /hr)	1250 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass





PREMIUM RANGE

F3 90

Feature	AC	DC
Suction (m ³ /hr)	2022 ± 10%	2200 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



F4 90

Feature	AC	DC
Suction (m ³ /hr)	1150 ± 10%	1250 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



F5 90

Feature	AC	DC
Suction (m³/hr)	1640 ± 10%	1750 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



F6 90

Feature	AC	DC
Suction (m ³ /hr)	2225 ± 10%	2350 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



L1 90

Feature	AC	DC
Suction (m³/hr)	1313 ± 10%	1500 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



L2 90

Feature	AC	DC
Suction (m ³ /hr)	1400 ± 10%	1680 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



L3 90

Feature	AC	DC
Suction (m ³ /hr)	2200 ± 10%	2350 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



L4 90

Feature	AC	DC
Suction (m ³ /hr)	1140 ± 10%	1500 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass



L5 90

Feature	AC	DC
Suction (m ³ /hr)	1140 ± 10%	1500 ± 10%
Noise Level	<58 dB	<58 dB

➔ BIS on Full Chimney



➔ ISI Mark on Glass

