Dongguan Fvwin Electronics Co.,Ltd

Attn: Alisa Hwang | Tel:+86-15999819066
Email:fvwin@fvwin.com | Skype:evelynhwang2013
http://www.fvwindz.com | http://www.led-tact-switch.com
Add:NO 168,Technology East Road,Shijie Town,Dongguan,Guangdong,CN,523302

FVWIN ELECTRONICS

TS15 Series Illuminated Push Button Switch						
Pic						
Model	TS15-9W56WTG(MENU)	TS15-9W56WTW	TS15-10W57WTG(SOLO)	TS15-10W57WTU1	TS15-12W58WTR	TS15-12W58WBG1
Size(mm)	12(L)*12(W)*13.1(H)	12(L)*12(W)*13.1(H)	15(L)*15(W)*12.7(H)	15(L)*15(W)*12.7(H)	16(ϕ)*13.1(H)	16(ϕ)*13.1(H)
Circuit	SPST	SPST	SPST	SPST	SPST	SPST
Function	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary
Rating	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC
Electrically Life	2,00,000 Cycles Min	2,00,000 Cycles Min	2,00,000 Cycles Min	2,00,000 Cycles Min	2,00,000 Cycles Min	2,00,000 Cycles Min
Actuation Force	250±50gf	250±50gf	250±50gf	250±50gf	250±50gf	250±50gf
Total Travel	0.4±0.15mm	0.4±0.15mm	0.4±0.15mm	0.4±0.15mm	0.4±0.15mm	0.4±0.15mm

Audio/Video Illuminated Push Button Switch					
Pic					
Model	PB24-0000R	PB30B-0000R	PB34-0000R	PB30A-0000R	PB30A-0000G
Size(mm)	12(L)*12(W)*23(H)	15(L)*15(W)*23(H)	17.4(L)*17.4(W)*22.65(H)	15(L)*15(W)*18.5(H)	15(L)*15(W)*18.5(H)
Circuit	SPST	SPST	SPST	SPST	SPST
Function	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary	OFF-(ON) Momentary
Rating	100mA 12VDC	100mA 12VDC	100mA 12VDC	5A 250VAC;0.4A 28VDC	5A 250VAC;0.4A 28VDC
Electrically Life	1,000,000 Cycles Min	1,000,000 Cycles Min	100,000 Cycles Min	2,00,000 Cycles Min	2,00,000 Cycles Min
Actuation Force	250±100gf	250±100gf	250±100gf	200±100gf	200±100gf
Total Travel	4.5±0.2mm	4.5±0.2mm	4.5±0.2mm	2.2±0.5mm	2.2±0.5mm

FVWIN ELECTRONICS

Features:

1. Available in three different cap sizes of 12 mm, 15 mm,16mm and 17.4 mm
2. Sculpted Clear Cap style or Laser etch on clear lens for design flexibility in audio/video applications
3. Available with super bright red,green,blue or bI-color or RGB LED
4. A best solution for all broadcast and Pro A/V panel need

TS7 Series Illuminated Tact Switch (RGB / Bi-color LED Options)						
Pic		 heat-resistant				
Model	TS7-0000RGA	TS7-0000RGBA	TS7-0000RU	TS7-0051WRGB1	TS7-0051BRU6	TS7-0051BRGB1
Outline Size(mm)	7(L)*7(W)*7(H)	7(L)*7(W)*7(H)	7(L)*7(W)*7(H)	ϕ10*8.2(H)	ϕ10*8.2(H)	ϕ10*8.2(H)
Cap Size(mm)	NON	NON	NON	ϕ10	ϕ10	ϕ10
Terminal Type	SMD	SMD	DIP	DIP	DIP	DIP
Rating	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC
Lifespan	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf	160±50gf	160±50gf	160±50gf	160±50gf	160±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

Features:

RGB and Bi-color(RED-BLUE&RED-GREEN&RED-WHITE)LED Options

SMD and Thru-hole terminal

10MM Round shape cap are available

Tiny size and crispy sound feedback

TS8 Series Illuminated Tact Switch

Pic						
Model	TS8-0000UA	TS8-0000W	TS8-002AR	TS8-003B0	TS8-0030AR1	TS8-007AY1
Outline Size(mm)	6(L)*6(W)*7(H)	6(L)*6(W)*7(H)	7.5(L)*7.5(W)*8.3(H)	10(L)*10(W)*8.3(H)	10(L)*10(W)*8.3(H)	10(L)*10(W)*8.3(H)
Cap Size(mm)	NON	NON	7.5*7.5	7.5(ϕ)*2.4(H)	10*10	10*10
Terminal Type	SMD	DIP	DIP	DIP	DIP	DIP
Lifespan	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm
Pic						
Model	TS8-1A1AR	TS8-1A2GR	TS8-3A3AR	TS8-3B3AU6	TS8-3B3TU	TS8-00TWR6
Outline Size(mm)	10(L)*10(W)*8.3(H)	10(L)*10(W)*8.3(H)	10(ϕ)*8.3(H)	10(ϕ)*8.3(H)	10(ϕ)*8.3(H)	7.5(L)*7.5(W)*16.3(H)
Cap Size(mm)	10*10	10*10	ϕ10	ϕ10	ϕ10	ϕ5.5*10.4(H)
Lifespan	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

TS9 Series Illuminated Tact Switch


Photo						
Model	TS9-0000R	TS9-0000W1	TS9-003TR	TS9-003BWX	TS9-001AR1	TS9-002AR
Size(mm)	6(L)*6(W)*9(H)	6(L)*6(W)*9(H)	ϕ7.5*10(H)	ϕ8*10(H)	7.5(L)*7.5(W)*10(H)	7.5(L)*7.5(W)*10(H)
Cap Size(mm)	NON	NON	ϕ7.5*2.4(H)	ϕ8*2.4(H)	7.5(L)*7.5(W)*2.4(H)	7.5(L)*7.5(W)*2.4(H)
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

Photo						
Model	TS9-005BR1	TS9-007BUX	TS9-007AWX	TS9-009WR	TS9-005W19TX	TS9-0052WX
Size(mm)	10(L)*10(W)*10(H)	ϕ10*10(H)	ϕ10*10(H)	ϕ12.8*10(H)	12(L)*12(W)*11.5(H)	7.5(L)*7.5(W)*12(H)
Cap Size(mm)	7.5(L)*7.5(W)*2.4(H)	ϕ10*2.4(H)	ϕ10*2.4(H)	ϕ12.8*2.4(H)	12(L)*12(W)*5.0(H)	7.5(L)*7.5(W)*4.3(H)
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

Pic						
Model	TS9-3B3BU1	TS9-5B7AU6	TS9-5B7BU1	TS9-5B7WU	TS9-5B7BUX	TS9-5B8BY
Size(mm)	ϕ10*10(H)	ϕ12.8*10(H)	ϕ12.8*10(H)	ϕ12.8*10(H)	ϕ12.8*10(H)	ϕ12.8*10(H)
Cap Size(mm)	ϕ7.5*2.4(H)	ϕ10*2.4(H)	ϕ10*2.4(H)	ϕ10*2.4(H)	ϕ10*2.4(H)	ϕ10*2.4(H)
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

Pic						
Model	TS9-2A00U	TS9-0012TW	TS9-00TTW	TS9-00TWR	TS9-00TBR6	TS9-00TBR1
Size(mm)	11.1(L)*11.6(W)*9.8(H)	7(ϕ)*17.1(H)	7.5(L)*7.5(W)*17.8(H)	7.5(L)*7.5(W)*17.8(H)	7.5(L)*7.5(W)*17.8(H)	7.5(L)*7.5(W)*17.8(H)
Cap Size(mm)	NON	7 (ϕ)*7(L)*7(W)*9.4(H)	5.5(ϕ) *7.5(L)*7.5(W)*10.1(H)	5.5(ϕ) *7.5(L)*7.5(W)*10.1(H)	5.5(ϕ) *7.5(L)*7.5(W)*10.1(H)	5.5(ϕ) *7.5(L)*7.5(W)*10.1(H)
Electrically Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

TS10 Series Illuminated Tact Switch						
Pic						
Model	TS10-0000G	TS10-0011UU	TS10-00FWU	TS10-0013BR1	TS10-00FW17TWX	TS10-00FW17TWR
Size(mm)	6(L)*6(W)*9(H)	ϕ10*12.8(H)	9.0(L)*9.0(W)*15.4(H)	ϕ13*15(H)	11(L)*11(W)*16.9(H)	11(L)*11(W)*16.9(H)
Cap Size(mm)	NON	ϕ10*3.5(H)	9.0(L)*9.0(W)*6.2(H)	ϕ13*7.5(H)	11(L)*11(W)*8.7(H)	11(L)*11(W)*8.7(H)
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

Features:

Red/Blue/Green/Yellow/White Colors and Bi-color LED Options

Thru-hole mounting

Many caps are available

Accept to customize the icon on the top cap

TS16 Series Illuminated Tact Switch						
Pic						
Model	TS16-0000RG	TS16-0000U1	TS16-0023AU1	TS16-00EWR	TS16-00EAR6	TS16-0055WR
Size(mm)	7(L)*7(W)*7(H)	7(L)*7(W)*7(H)	7.5(ϕ)*8(H)	7.5(ϕ)*12.1(H)	7.5(ϕ)*12.1(H)	8.0(ϕ)*15.5(H)
Cap Size(mm)	NON	NON	7.5(ϕ)*2.4(H)	7.5(ϕ)*6.3(H)	7.5(ϕ)*6.3(H)	8.0(ϕ)*10(H)
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

Features:

Red/Blue/Green/Yellow/White Colors and Bi-color LED Options

Thru-hole mounting

Many caps are available


Accept to customize the symbol on the cap

TS17 Series Right Angle Illuminated Tact Switch

Pic						
Model	TS17-0000U	TS17-0023AR1	TS17-0022BU	TS17-0024WU	TS17-0021AU6	TS17-0027BG1
Size(mm)	7(L)*7(W)*7(H)	7.5(ϕ)*9.0(H)	7.5(ϕ)*9.0(H)	7.5(L)*7.5(W)*9.0(H)	10(ϕ)*9.0(H)	10(L)*10(W)*9.0(H)
Cap Size(mm)	NON	7.5(ϕ)*2.4(H)	7.5(ϕ)*2.4(H)	7.5(L)*7.5(W)*2.4(H)	10(ϕ)*2.4(H)	10(L)*10(W)*2.4(H)
Terminal Type	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle	Right Angle
Rating	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	250±50gf	250±50gf	250±50gf	250±50gf	250±50gf	250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

Pic				
Model	TS17-8BE00R	TS17-8BEAR1	TS17-00EWU	TS17-00EAWX
Size(mm)	10.5(H)	7.5(ϕ)*16.9(H)	7.5(ϕ)*12.2(H)	7.5(ϕ)*12.2(H)
Cap Size(mm)	7.5(ϕ)*6.3(H)	7.5(ϕ)*6.3(H)	7.5(ϕ)*6.3(H)	7.5(ϕ)*6.3(H)
Terminal Type	Right Angle	Right Angle	Right Angle	Right Angle
Rating	50mA 12VDC	50mA 12VDC	50mA 12VDC	50mA 12VDC
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm

FVWIN ELECTRONICS

TS20 Series Right Angle Illuminated Tact Switch						
Pic						
Model	TS20-0000R	TS20-003BR1	TS20-002AG	TS20-007BRX	TS20-005BG1	TS20-00TWR6
Outline Size(mm)	6.0(L)*6.0(W)*12.0(H)	ϕ7.5*13.9(H)	7.5(L)*7.5(W)*13.9(H)	ϕ10*13.9(H)	10(L)*10(W)*13.9(H)	7.5(L)*7.5(W)*19.5(H)
Cap Size(mm)	NON	ϕ7.5*2.4(H)	7.5(L)*7.5(W)*2.4(H)	ϕ10*2.4(H)	10(L)*10(W)*2.4(H)	7.5(L)*7.5(W)*2.4(H)
Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf	160±50gf 250±50gf
Total Travel	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm	0.25±0.1mm


FVWIN ELECTRONICS

Features:

6*6MM /7*7MM ,DIP & SMD & Right Angle terminal options

Red|Green|Blue|Yellow|Orange|White|Bi-color LED colors

Round &sqaure cap options,provide customized symbol of cap

TS85 Series Latching Illuminated Push Button Switch						
Pic						
Model	TS85-0000R	TS85-0028WR	TS85-0028GU	TS85-0060AU6	TS85-0029AR1	TS85-0022AR6
Size(mm)	7.5(L)*8.5(W)*10(H)	10(L)*10(W)*12.0(H)	10(L)*10(W)*12.0(H)	7.5(ϕ)*13(H)	10(ϕ)*19.8(H)	10(ϕ)*20(H)
Cap Size(mm)	NON	10(L)*10(W)*3.5(H)	10(L)*10(W)*3.5(H)	7.5(ϕ)*3.3(H)	10(L)*10(W)*13.4 (H)	10(L)*10(W)*13.6 (H)
Rating	0.1A 30VDC	0.1A 30VDC	0.1A 30VDC	0.1A 30VDC	0.1A 30VDC	0.1A 30VDC
Electrically Life	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min	500,000 Cycles Min
Actuation Force	250±100gf(Locking)	250±100gf(Locking)	250±100gf(Locking)	250±100gf(Locking)	250±100gf(Locking)	250±100gf(Locking)
	150±100gf(Momentary)	150±100gf(Momentary)	150±100gf(Momentary)	150±100gf(Momentary)	150±100gf(Momentary)	150±100gf(Momentary)
Total Travel	1.6±0.4mm	1.6±0.4mm	1.6±0.4mm	1.6±0.4mm	1.6±0.4mm	1.6±0.4mm
Lock Travel	1.4±0.4mm	1.4±0.4mm	1.4±0.4mm	1.4±0.4mm	1.4±0.4mm	1.4±0.4mm

FVWIN ELECTRONICS

Features:



Red/Blue/Green/Yellow/White Colors and Bi-color LED Options

Latching function

Many caps are available

Accept to customize the symbol on the cap

PB86 Series Illuminated Push Button Switch

Pic						
Model	PB86-A1UPNR	PB86-B1UUNR	PB86-A2RRG	PB86-B2RRG	PB86-B1UYNR	PB86-B0WNN
Size(mm)	12.3(L)*17(W)*11.5 (H)	17.4(L)*17(W)*11.5 (H)	12.3(L)*17(W)*11.5 (H)	17.4(L)*17(W)*11.5 (H)	17.4(L)*17(W)*11.5 (H)	17.4(L)*17(W)*11.5(H)
Function	Momentary	Momentary	Momentary	Momentary	Momentary	Momentary
Rating	12mA 24VDC	12mA 24VDC	12mA 24VDC	12mA 24VDC	12mA 24VDC	12mA 24VDC
Electrically Life	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min
Actuation Force	170±50gf	170±50gf	170±50gf	170±50gf	170±50gf	170±50gf
Total Travel	2.0±0.4mm	2.0±0.4mm	2.0±0.4mm	2.0±0.4mm	2.0±0.4mm	2.0±0.4mm

Illuminated Push Button Switch

Pic		
Model	PB58-0000U	PB07-RB0R0
Size(mm)	5.8(L)*5.8(W)*10.2(H)	15.1(L)*15.1(W)*15.4
Function	Momentary	Latching
Electrically Life	10,000 Cycles Min	50,000 Cycles Min
Actuation Force	180±50gf	200±50gf
Total Travel	1.9±0.2mm	2.5±0.4mm

PB86 Features:

1.Red/Blue/Green/Yellow/White Colors and Bi-color LED Options,
2.Through Hole Mounting
3.Many caps are available
4.Accept to customize the symbol or text on the cap

FVWIN ELECTRONICS


SPST Key Button Tact Switch					
Pic					
Model	TS3-AYN	TS3-BUN	TS4-2R	TS4-1A	TS4-3B
Size(mm)	12.4*12.4*8.7(H)	14.7*14.7*8.7(H)	ϕ11.5*10.5(H)	ϕ11.5*10.5(H)	ϕ 11.5*13.1(H)
Button Size(mm)	10.2*10.2	10.2*10.2	ϕ 8mm	8*8	ϕ 8mm
Circuit	SPST	SPST	Push（NO）	Push（NO）	Push（NO）
Function	OFF-(ON)Momentary	OFF-(ON)Momentary	OFF-(ON)Momentary	OFF-(ON)Momentary	OFF-(ON)Momentary
Rating	0.5A 30VDC;0.25A 50VDC	0.5A 30VDC;0.25A 50VDC	30mA 30VDC	30mA 30VDC	30mA 30VDC
Electrically Life	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min
Actuation Force	400±100gf/250±100gf	400±100gf/250±100gf	200±50gf	200±50gf	200±50gf
Total Travel	1.0mm±0.25mm	0.7mm±0.25mm	0.7mm±0.2mm	0.7mm±0.2mm	0.7mm±0.2mm

FVWIN ELECTRONICS

Features:


1. Multiple button color options and wear-resisting material
2. Different size selections
3. Gold plated contact,more reliable and good conductivity

Mini Tactile Switch						
Pic						
Model	TS45-45X	TS45-45XA	TS45-45R	TS52-52A	TS62-62R	TS12-1273
Size(mm)	4.5*4.5	4.5*4.5	4.5*4.5	5.2*5.2	6.2*6.2	12*12*7.3
Height(mm)	3.5/3.8/4.3/5/5.5/6/7/8	3.5/3.8/4.3/5/5.5/6/7/8	3.5/3.8/4.3/5/5.5/6/7/8	1.5/1.7/2.0/2.5/3.0/3.5	4.2/4.5/5/5.5/6/6.5/7/7.5-15	7.3MM
Actuation Force	100-350gf	100-350gf	100-350gf	100-350gf	100-350gf	100-350gf
Life Span	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min


Waterproof Tactile Switch						
Pic						
Model	TS62-6231	TS62-6235	TS62-6252	TS62-6231A	TS62-6243A	TS62-6250A
Size(mm)	6.2*6.2*3.1	6.2*6.2*3.5	6.2*6.2*5.2	6.2*6.2*3.1	6.2*6.2*4.3	6.2*6.2*5.0
Height(mm)	3.1/3.5/4.3/5.0/5.2	3.1/3.5/4.3/5.0/5.2	3.1/3.5/4.3/5.0/5.2	3.1/3.5/4.3/5.0/5.2	3.1/3.5/4.3/5.0/5.2	3.1/3.5/4.3/5.0/5.2
Actuation Force	160/250gf	160/250gf	160/250gf	160/250gf	160/250gf	160/250gf
Life Span	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min	100,000 cycles min
Waterproof Level	IP67	IP67	IP67	IP67	IP67	IP67

FVWIN ELECTRONICS

Self-locking/ Momentary Push Button Switch

Pic						
Model	PB58-5881A	PB58-5810	PB58-5810R	PB70-7016	PB80-8013	PB85-8513
Size(mm)	5.8(L)*5.8(W)*8.1(H)	5.8(L)*5.8(W)*10.1(H)	5.8(L)*5.8(W)*10(H)	7(L)*7(W)*16(H)	8(L)*8(W)*13.5(H)	8.5(L)*8.5(W)*13.9(H)
Rating	0.1mA 30VDC	0.1mA 30VDC	0.1mA 30VDC	0.1mA 30VDC	0.1mA 30VDC	0.1mA 30VDC
Actuation Force	250±100gf	250±100gf	250±100gf	250±100gf	250±100gf	250±100gf
Total Travel	2.5±0.2mm	2.5±0.2mm	2.5±0.2mm	2.5±0.2mm	2.5±0.2mm	2.5±0.2mm
Function	latching/Momentary	latching/Momentary	latching/Momentary	latching/Momentary	latching/Momentary	latching/Momentary

Momentary Push Button Switch

Pic						
Model	PB04-BR	PB02-PMR	PB01-PPG	PB10-BBR	PB05-AR	PB15-1511U
Cut-out Size(mm)	12.8*11	ϕ16	ϕ12.7	ϕ12.5	ϕ7.5	15.6(L)*15.6(W)*11.1 (H)
Rating	3A 125V DC AC/1.0A 250V AC	6A 125V AC/3A 250V AC	3A 125V AC/1.5A 250V AC	3A 125V AC(15A 250V AC)	3A 125V AC/1.5A 250V AC	10mA DC12V
Actuation Force	250±100gf	250±50gf	150±100gf	350±100gf	250±50gf	60±10gf
Total Travel	2.5±0.4mm	2.4±0.4mm	2.0±0.4mm	3.0±0.5mm	1.4±0.4mm	4.0±0.4mm

FVWIN ELECTRONICS

XLR Socket Connector

Picture Display					
Model	FVXLR-CT304HFBP	FVXLR-CT304FPA	FVXLR-CT305HM01	FVXLR-CT305M01	FVSKON-HP30L
Rating	DC250V 1A	DC250V 1A	DC250V 1A	DC250V 1A	DC30V
Insulation Resistance	≤0.03Ω	≤0.03Ω	≤0.03Ω	≤0.03Ω	≤30mΩ
Contact Resistance	≥100MΩ	≥100MΩ	≥100MΩ	≥100MΩ	≥2000MΩ
Insertion and withdraw Force	10-50N	10-50N	10-50N	10-50N	/
Withstand Voltage	AC1500V(50Hz) 1 min	AC1500V(50Hz) 1 min	AC1500V(50Hz) 1 min	AC1500V(50Hz) 1 min	AC2700V(50Hz) 1 min
Life	3,000 cycles	3,000 cycles	5,000 cycles	5,000 cycles	3,000 cycles

AC Power Socket

Pic						
Model	S03-F11S	S03-11	S03-121	S03-12S4	S03F-114	
Rating	6.3A 250VAC(UL CUL) 6.3A 250VAC(VDE) 10A 250VAC(CCC)	15A 250V AC(UL CUL) 10A 250VAC(CCC)	15A 250V AC(UL CUL) 10A 250VAC(CCC)	15A 250V AC(UL CUL) 10A 250VAC(CCC)	6.3A 250VAC(UL CUL) 6.3A 250VAC(VDE) 10A 250VAC(CCC)	

FVWIN ELECTRONICS

Toggle Switch

Pic						
Model	TG8701-BRE	TG8017P-R112Q	TG8013-SEBQ	TG8019	TG8019	TG301-SEBQ
Circuit	SPDT	DPDT	SPDT	SPDT	SPDT	3PDT
Function	ON-OFF	ON-ON	ON-OFF	ON-OFF	ON-OFF	ON-ON

Metal Push Button Switch

Pic						
Cut-out Size(mm)	12	12	12	16	19	22
Function	Momentary/Latching	Momentary/Latching	Momentary/Latching	Momentary/Latching	Momentary/Latching	Momentary/Latching
Rated	5A 125VAC;3A 250VAC	5A 125VAC;3A 250VAC	5A 125VAC;3A 250VAC	5A 125VAC;3A 250VAC	5A 125VAC;3A 250VAC	5A 125VAC;3A 250VAC
LED color	R/U/G/W/Y	R/U/G/W/Y	R/U/G/W/Y	R/U/G/W/Y	R/U/G/W/Y	R/U/G/W/Y
Actuation Force	200±50gf	200±50gf	200±50gf	200±50gf	200±50gf	200±50gf
Life	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min	50,000 Cycles Min

FVWIN ELECTRONICS

Plastic Injection Mould

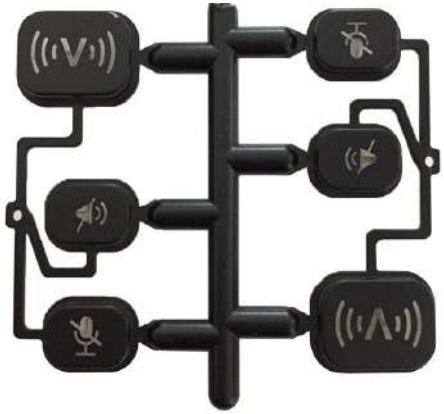
















Features:

Round and square cap options

Welcome customized the symbol

Provide Laser engraved service

FVWIN ELECTRONICS