



MIC POOL SPA EQUIPMENT LIMITED



<http://micpoolspa.com>

GUANGZHOU MIC POOL SPA EQUIPMENT CO., LTD.

Email: info@micpoolspa.com

Contact: 008618565368026 (whatsapp/wechat)

skype: 18565368026

Address: 4F, No.22 hetai road, baiyun District, Guangzhou city, China.

MIC POOL SPA EQUIPMENT LIMITED

HK Address: A2-5/F Hong Kong Trade Centre,

161-167 DesVoeux Road Central, Hong Kong



WEBSITE



WECHAT



CERTIFICATE

Quality is our culture



MIC POOL SPA EQUIPMENT LIMITED established since 2008, is a professional manufacturer for swimming pool and spa equipment. We mainly produce high quality, competitively price for pool filter, pool pump, pool ladder, pool fitting, and pool light,etc.

We use 2 years to get products and domestic markets steady growth, reach fifteen million Chinese yuan and decide to expand pool equipment to pool stainless steel, and waterfull. Our brand is "MICPOOL", our factory also can OEM/ODM.


The company oversea sales has reached one and half million dollars from over 60 clients. we have professional technical development team, marketing team and after sales service team, hope we can relised win-win sistulation.

The Company takes "the customer's requirement is our standard" as its main goal, with 10 years of experience in professional design and excellent design team, providing customers with unique professional solutions.


The Company has import and export rights, and products are exported to Europe, America, the Middle East, Southeast Asia, South America, and more than 50 countries, thus we have a very deep understanding of quality system, such as the European CE certification system and ISO 9001 certification system, etc. The Company has tens of millions of annual sales, and, at the same time, maintains a long-term and stable cooperation relationship with local dealers.

Contents

Pool filters	03-10
Pool pumps	11-16
Pool pvc fittings	17-24
Pool lights	25-30
Pool cleaning systems	31-34
Pool ladders&SPA	35-42
Pool heating systems	43-44
Pool disinfection	45-48
Fountain series	49-56
Sauna & Steam	57-71
Outdoor Furniture	72-72

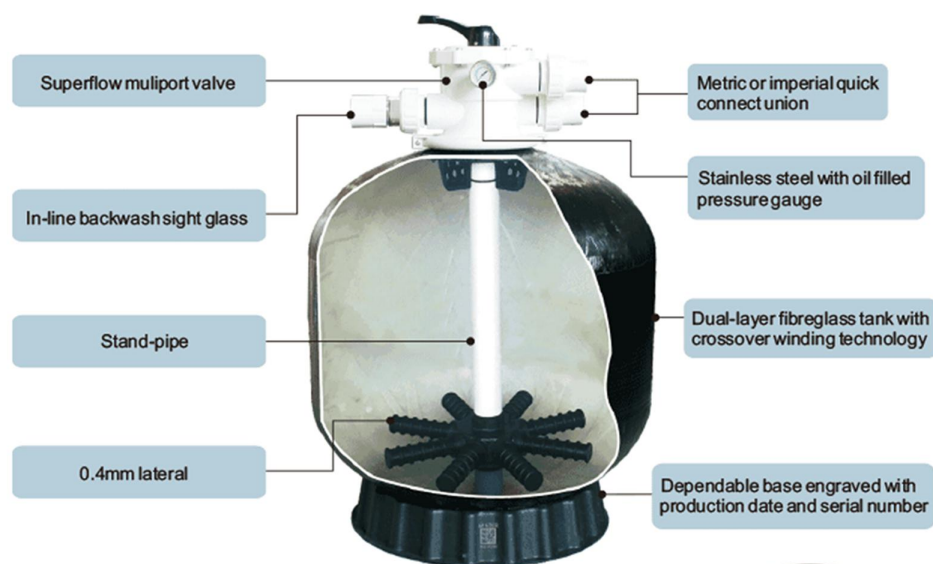


- Maximum working temperature of 50°C (122°F)
- Normal working pressure is rated at 280kPa (41psi), with maximum working pressure of 370kPa (54psi)
- Optional water drain can be added upon requested



Classic Fiberglass Media Filter (Top Mounted) Specifications

MODEL	Tank Dia.	MPV size				Filter Area	Bed Depth	Silica Sand	Max Flow Rate		Designed Velocity	Back Wash Flow Rate		Max. Working Pressure	Gross Weight
		mm	inch	mm (AUS)	mm (EU)				m2	mm		kg	lpm		
M14	346	1.5	40	50	0.1	175	20	80	5	48	84	5	370	12	
M16	410	1.5	40	50	0.13	230	30	105	6	48	110	7	370	16	
M18	454	1.5	40	50	0.16	280	40	133	8	48	140	8	370	16.5	
M21	534	1.5	40	50	0.23	240	85	192	12	48	202	12	370	21.1	
M25	635	1.5	40	50	0.33	336	155	270	16	48	284	17	370	24.3	
M28	700	1.5	40	50	0.38	348	210	320	19	48	336	20	370	33	
M25B	635	2	50	63	0.33	336	155	305	18	48	320	19	370	24.3	
M28B	700	2	50	63	0.38	348	210	333	20	48	350	21	370	33	
M32	820	2	50	63	0.5	384	250	420	25	48	441	26	370	41.5	
M36	920	2	50	63	0.64	384	350	500	30	48	525	31	370	52.3	
M40	1016	2	50	63	0.79	432	600	550	33	48	578	35	370	95	
M44	1092	2	50	63	0.98	432	900	630	38	48	662	40	370	115	
M48	1210	2	50	63	1.13	504	1150	700	42	48	735	44	370	124	
M56	1404	2	50	63	1.54	708	1800	950	57	48	998	60	370	182.5	

Dimensions

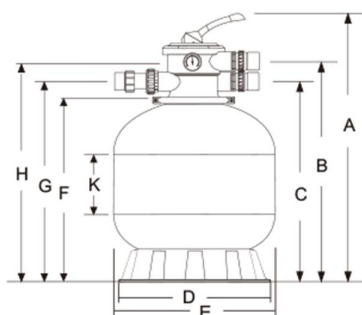

Model	A	B	C	D	E	F	G	H	K	Packaging sizes (Excluded MPV)		
										Length	Width	Height
	mm											
M14	680	550	490	390	346	431	490	550	175	349	349	434
M16	770	641	585	390	410	525	585	641	230	413	413	528
M18	810	674	614	390	454	558	614	674	250	457	457	561
M21	867	731	671	497	534	615	671	731	240	537	537	618
M25	967	831	771	497	635	715	771	831	280	638	638	718
M28	1027	891	831	497	700	775	831	891	290	703	703	778
M25B	1017	863	783	497	635	717	783	863	280	638	638	720
M28B	1080	926	846	497	700	780	846	926	290	703	703	783
M32	1180	1026	946	714	820	880	946	1026	320	823	823	883
M36	1285	1131	1051	714	920	985	1051	1131	320	923	923	988
M40	1406	1252	1172	720	1016	1106	1172	1252	360	1019	1019	1109
M44	1480	1350	1270		1092	1210	1290	1340	360	1095	1095	1213
M48	1500	1450	1370		1210	1310	1370	1400	420	1213	1213	1313
M56	1615	1565	1485		1404	1425	1485	1575	590	1407	1407	1428



Classic Fiberglass Media Filter (Side Mounted) Specifications

MODEL	Tank Dia.	MPV size				Filter Area	Bed Depth	Silica Sand	Max Flow Rate		Designed Velocity	Back Wash Flow Rate		Max. Working Pressure	Gross Weight
	mm	inch	mm (AUS)	mm (EU)	m2	mm	kg	lpm	m3/h	m3/hr/m2	lpm	m3/h	kpa	kg	
MS18	454	1.5	40	50	0.16	0.16	40	133	8	48	140	8	375	16.5	
MS21	541	1.5	40	50	0.22	0.23	85	192	12	48	202	12	375	21.1	
MS25	621	1.5	40	50	0.33	0.33	155	270	16	48	284	17	375	24.3	
MS28	705	1.5	40	50	0.38	0.38	210	320	19	48	336	20	375	33	
MS28B	705	2	50	63	0.4	0.38	210	333	20	48	350	21	375	33	
MS32	821	2	50	63	0.5	0.5	250	420	25	48	441	26	375	41.5	
MS36	921	2	50	63	0.64	0.64	350	500	30	48	525	31	375	52.3	
MS40	1016	2	50	63	0.79	0.79	600	550	33	48	578	35	375	95	




Dimension (mm)

Model	Valve Size	A	B	C	D	E	F	G	H	K	Packaging sizes (Exclude MPV)		
											Length	Width	Height
mm													
MS18	40	668	538	390	454	75	239	564	130	125	457	457	671
MS21	40	732	602	497	534	90	254	576	130	125	537	537	735
MS25	40	847	717	497	635	90	310	634	130	125	638	638	850
MS28	40	910	780	497	700	90	350	675	130	125	703	703	913
MS28B	50	910	780	497	700	90	322	744	130	195	703	703	913
MS32	50	1010	880	714	820	125	361	786	130	195	823	823	1013
MS36	50	1115	985	714	920	125	405	846	130	195	923	923	1118
MS40	50	1145	1068	720	1016	150	475	900	77	125	1019	1019	1148

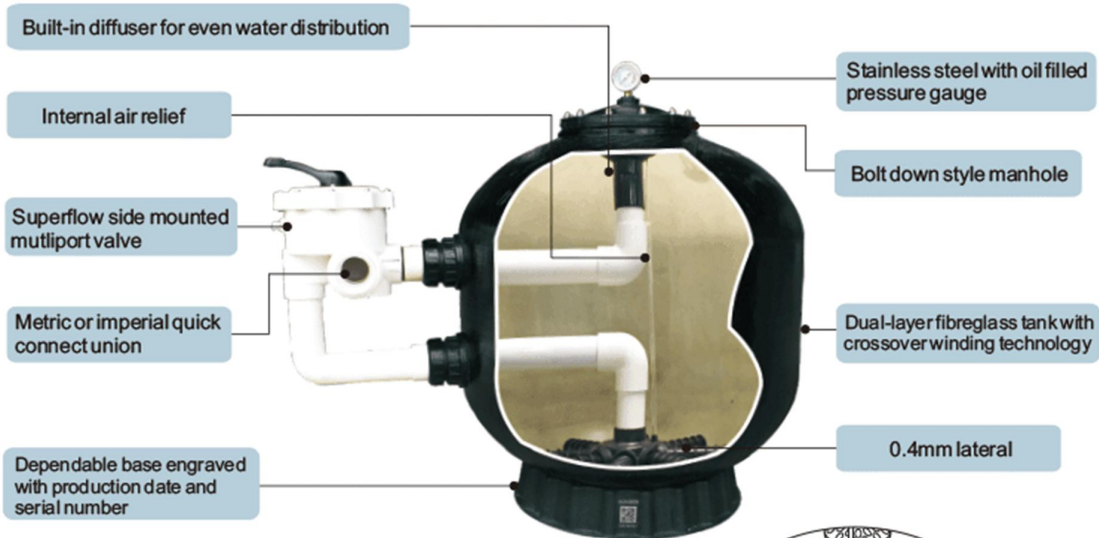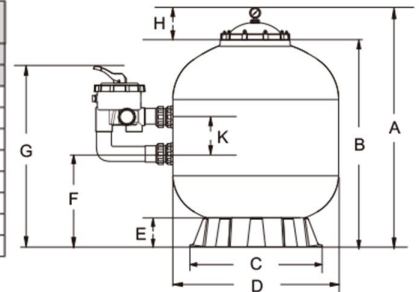

- Maximum working temperature of 50°C (122°F);
- Normal working pressure is rated at 280kPa (41psi), with maximum working pressure of 370kPa (54psi);
- Optional water drain can be added upon requested.



“FSF” Series Filtration Combo “FSF”系列纤维沙缸连水泵组合

FSF系列过滤组合设计适用于私家泳池、景观水处理，家庭用户提供出色的过滤性能和简单的安装使用方案。包括顶出玻璃纤维过滤沙缸、多功能6路沙缸、水泵和底座整体组合。



Designed for easy set-up domestic pool, “FSF” Series filtration combo offers the right solution for home user who is looking for user-friendly and excellent filtration performance. FSF Series Filtration Combo includes top mount fiberglass filter tank, 6-way multiport valve, swimming pool pumps attached with base.



- Highlight Features:**
- Max operating pressure 36psi/2.5bar
 - Max temperature of 43° C (109° F)
 - Universal standard of union connection provided
 - Suggested size of media: 0.5-1.2mm

特性:

- 最大工作压力: 36psi/2.5bar
- 最大操作温度: 43° C (109° F)
- 接管管口公英制通用
- 石英砂规格: 0.5-1.2mm

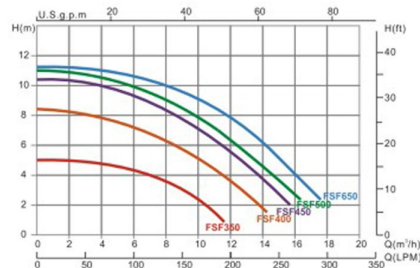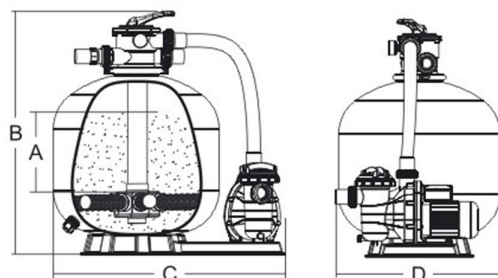

Technical Characteristics 参数表

型 号 Model No	沙缸型号 Filter	水泵型号 Pump	接管尺寸 Valve Connections		沙量 Sand (kg)
FSF350-6W	V350	SS033	1.5 inch	50mm	20
FSF400-6W	V400	SS050	1.5 inch	50mm	35
FSF450-6W	V450	SS075	1.5 inch	50mm	45
FSF500-6W	V500	SC100	1.5 inch	50mm	85
FSF650-6W	V650	SC150	1.5 inch	50mm	145

型号 Model No	A mm	B mm	C mm	D mm	最大流量 Max Flow Rate
FSF350-6W	160	680	555	355	72lpm 4.32m³/h
FSF400-6W	175	759	760	410	108lpm 6.48m³/h
FSF450-6W	210	813	760	455	135lpm 8.10m³/h
FSF500-6W	235	856	760	535	185lpm 11.10m³/h
FSF650-6W	300	961	760	635	260lpm 15.60m³/h

注: 因各地区石英砂规格有所差异, 装沙资料仅供参考。

Note: Suggested sand weight varies with differences in filter media size. For reference only

“FSB” Series Filtration Combo “FSB”系列纤维沙缸连水泵组合

FSB系列过滤组合设计适用于私家泳池、景观水处理，家庭用户提供出色的过滤性能和简单的安装使用方案。包括顶出玻璃纤维过滤沙缸、多功能6路沙缸、水泵和底座整体组合。



Designed for easy set-up domestic pool, “FSF” Series filtration combo offers the right solution for home user who is looking for user-friendly and excellent filtration performance. FSF Series Filtration Combo includes top mount fiberglass filter tank, 6-way multiport valve, swimming pool pumps attached with base.



- Highlight Features:**
- Max operating pressure 36psi/2.5bar
 - Max temperature of 43° C (109° F)
 - Universal standard of union connection provided
 - Suggested size of media: 0.5-1.2mm

特性:

- 最大工作压力: 36psi/2.5bar
- 最大操作温度: 43° C (109° F)
- 接管管口公英制通用
- 石英砂规格: 0.5-1.2mm

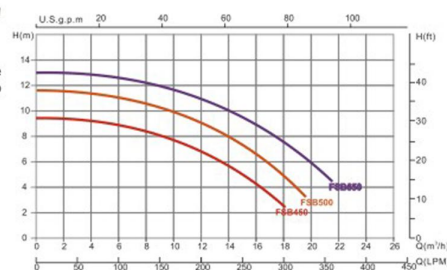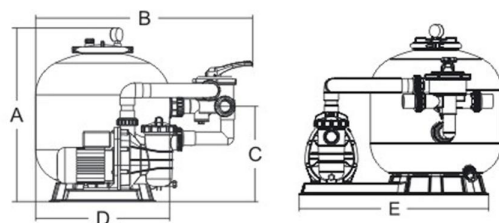

Technical Characteristics 参数表

型 号 Model No	沙缸型号 Filter	水泵型号 Pump	接管尺寸 Valve Connections		沙量 (kg) Sand
FSB450-6W	S450	SS075	1.5 inch	50mm	45
FSB500-6W	S500	SC100	1.5 inch	50mm	85
FSB650-6W	S650	SC150	1.5 inch	50mm	145

型号 Model No	A mm	B mm	C mm	D mm	最大流量 Max Flow Rate
FSB450-6W	730	790	360	449	760 135lpm 8.10m³/h
FSB500-6W	770	867	390	527	760 185lpm 11.10m³/h
FSB650-6W	850	967	430	627	760 260lpm 15.60m³/h

注: 因各地区石英砂规格有所差异, 装沙资料仅供参考。


Note: Suggested sand weight varies with differences in filter media size. For reference only

“CF”Series Cartridge Filters “CF”系列纸芯过滤器



最大工作压力 Maximum Working Pressure:
250kPa /36psi/2.5bar

最高操作温度 Maximum Water Temperature:
40° C (100° F)



特征

- 外型美观，简约轻便。
- 缸身采用防晒材料。
- 螺母锁紧的设计更易于清洁与维护。
- 设有减压装置。
- 优质的油压表便于检测工作压力。
- 适合各中小型泳池及水疗池使用。

FEATURES

- Compact and light weight
- UV resistant tank
- Heavy duty ring-lock lid allows easy cleaning and replacement of the cartridge element
- Screw type air bleeder for easy removal of trapped air inside the filter tank
- High quality oil filled pressure gauge for easy inspection of the operation pressure
- Application to domestic swimming pool & spa

Technical Characteristics 参数表


型号 Mode	过滤面积 Filter Area(m²)	接管尺寸 Valve Connections	最大流量 Max Flow Rate	A mm	B mm	C mm
CF25	2.25	1½ inch 50mm	92lpm 5.5m³/h	445	387	225
CF50	4.63	1½ inch 50mm	190lpm 11.4m³/h	625	567	225
CF75	7.00	1½ inch 50mm	283lpm 17.0m³/h	805	747	225
CF100	9.40	2 inch 63mm	382lpm 22.9m³/h	985	927	225
CF150	13.72	2 inch 63mm	555lpm 33.4m³/h	1165	1107	225
CF200	16.82	2 inch 63mm	680lpm 40.9m³/h	1345	1287	225

“FSC” Series Filtration Combo “FSC”系列纸芯过滤器组合



最大工作压力 Maximum Working Pressure:
250kPa /36psi/2.5bar

最高操作温度 Maximum Water Temperature:
40° C (100° F)

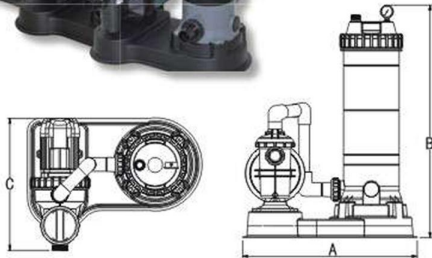

特征

- 容易安装和操作
- 缸体采用防晒材料
- 螺母锁紧的设计更易于清洁与维护
- 优质的油压表更容易检查的工作压力
- 所配循环泵达IPX5防水标准,并内置热保护
- 适用于各中小型泳池及水疗池使用


FEATURES

- Easy setup and operate
- UV resistant cartridge filter tank
- Heavy duty ring-lock lid allows easy-open for cleaning and replacing cartridge element
- Oil filled pressure gauge for easy inspection of the operation pressure
- Attached with circulation pump which IPX5 Waterproof standard certified and built-in thermal protection
- Application to domestic swimming pool & spa

Technical Characteristics 参数表

型号 Mode	纸芯缸	水泵 Pump	接管尺寸 Valve Connections	最大流量 Max Flow Rate	A mm	B mm	C mm
FSC025	CF25	SS033	1½ inch 50mm	92lpm 5.53m³/h	705	580	490
FSC050	CF50	SS100	1½ inch 50mm	190lpm 11.43m³/h	705	760	490
FSC075	CF75	SC100	1½ inch 50mm	283lpm 17.03m³/h	705	940	532
FSC100	CF100	SB10	2 inch 63mm	382lpm 22.93m³/h	705	1120	600
FSC150	CF150	SB15	2 inch 63mm	555lpm 33.43m³/h	705	1300	600
FSC200	CF200	SB20	2 inch 63mm	680lpm 40.93m³/h	705	1480	600

Cartridge Filter Element for CF “CF”系列纸芯缸用纸芯



Technical Characteristics 参数表

型号 Mode	D mm	E mm	微米 Micron (μm)
CF25-CE	φ 183	184.5	≤15
CF50-CE	φ 183	364.5	≤15
CF75-CE	φ 183	544.5	≤15
CF100-CE	φ 183	724.5	≤15
CF150-CE	φ 183	904.5	≤15
CF200-CE	φ 183	1091.0	≤15



特点:




缸体为玻璃纤维增强型材料缠绕成型而成。防腐蚀、耐磨损，不易变形。设计独特的布水器能均匀的
稳定水流。暗渠排水系统效率高。易安装、易维修、保养方便。出水浊度小于2度。

Feaures:

The winding of fibreglass around the filter body makes the filter more durable, deforming-proof, and
resistance to chemical and corrosives. Uniquely designed distribution make a stable and even water
flow to improve drainage system. All sand filters with pressure gauge. Easy to install,


法兰式 Commercial sand filter

型号 Model No.	缸径(mm) Tank dia	高度(mm) Hight	管径(inch) Pipe size	过滤面积(m²) FILTER AREA	砂重(kg) Silca sand	流量(m³/h) Flow	工作压力(kg/cm²) Pressure
MC-1200	1200	1450	3	1.14	1100	60	2.5
MC-1400	1400	1520	4	1.56	1900	76	2.5
MC-1600	1600	1760	4	2.01	2600	100	2.5
MC-1800	1800	1940	4	2.54	3500	129	2.5
MC-2000	2000	2420	6	3.14	4100	157	2.5
MC-2400	2400	2520	6	4.34	8900	218	2.5
MC-2500	2500	2680	6	4.91	11000	246	2.5

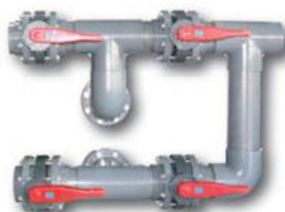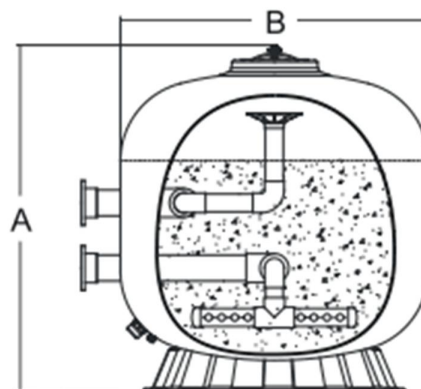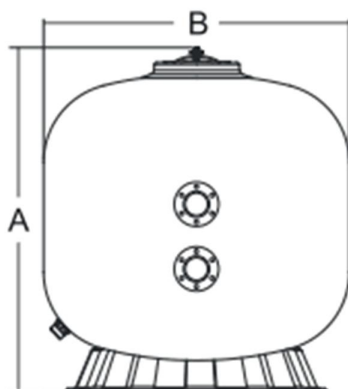


4 功能蝴蝶阀
4 Way butterfly valve

最大工作压力: 250kPa/36psi/2.5bar
最大测试压力: 400kPa/58psi/4.0bar
最高操作温度: 43° C (109° F)
Maximun Working Pressure: 250kPa/36psi/2.5bar
Factory Testing Pressure: 400kPa/58psi/4.0bar
Maximum Water Temperature: 43° C (109° F)

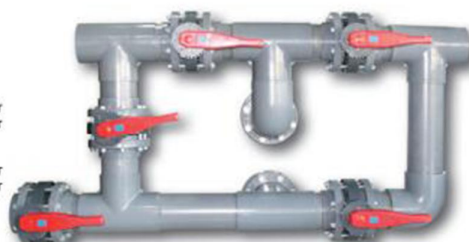

5 功能蝴蝶阀
5 Way butterfly valve

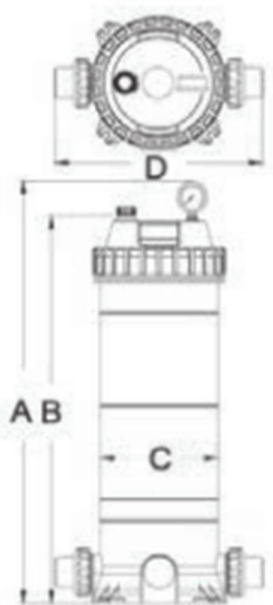

纸芯过滤是一种即方便且有效的过滤方法,当池水通过过滤器的纸芯,水中的浮游物便阻隔在纸芯当中,而干净的水便流回池中。随着纸芯使用日久,污物积累在纸芯上,使缸内的压力变大,而流量减少,而在压力超标时,便要取出纸芯做清洗(一般可用清水射在纸芯上,把污物冲去便可)。


Cartridge filtration is an effective trouble-free proven method of filtration. Pool water enters the filter and passes through a polyester single element cartridge. Suspended particles are trapped and the water is returned to the pool. As the build-up of dirt in the element increases, so the water pressure rises and the flow decreases. When the pressure reaches an unacceptable level, the element must be removed and cleaned.

Technical Characteristics 参数表


型号 Model	高 High A (mm)	高 High B (mm)	直径 Diameter C (mm)	直径 Diameter D (mm)	过滤面积 Filtration Area (m ²)	流量 Design Flow (m ³ /h)
AF25	445	387	225	397	2.25	5.5
AF50	625	567	225	397	4.63	11.4
AF75	805	747	225	397	7.00	17.0
AF100	985	927	225	397	9.38	22.9
AF150	1165	1107	225	397	13.72	33.4

WALL-MOUNTED FILTER

The enclosure of wall-mounted filter is made of high quality Acrylic, so the filter is anti-acid anti fading, and easy to clean. Integrated filter installation without room, simple installation, construction cost. The filter is made according to Countries codes and standards.

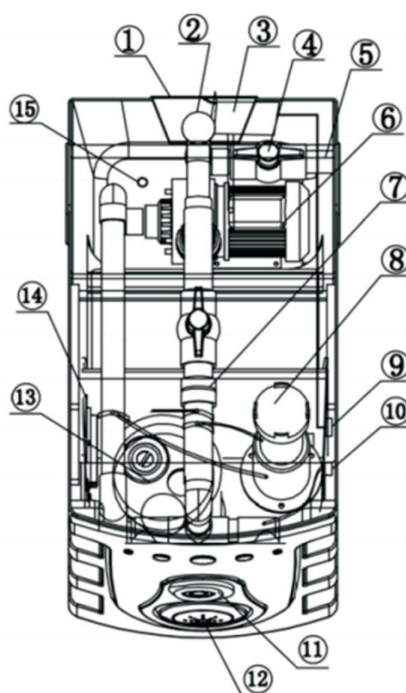

- ① Filter housing
- ② Water injection
- ③ Electric controller
- ④ Drainage valve
- ⑤ Drainage outlet
- ⑥ Water pump
- ⑦ Connectors
- ⑧ Sterilizer
- ⑨ Switch
- ⑩ Air switch
- ⑪ Injector nozzle
- ⑫ Underwater light
- ⑬ Cartridge filter
- ⑭ Water inlet
- ⑮ Water Overflow Port

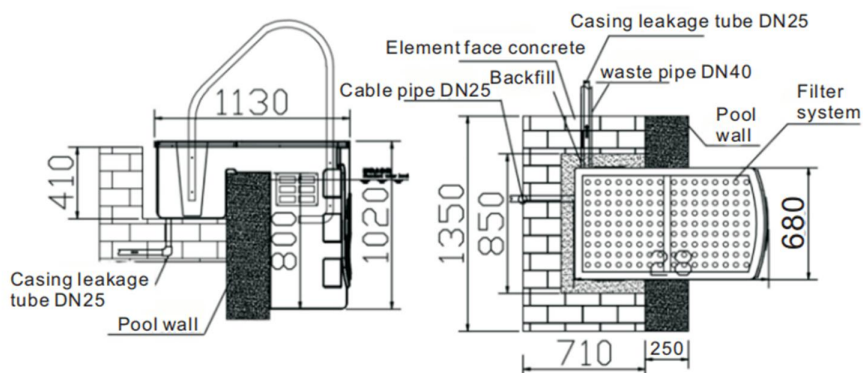

Technical Information

Model No.	Powe	Rated Water	Material	Dimension	Voltage	Under-water Light	Filter Mdeia	Efficiency	Assemble Way	Colors
M-07	1.5HP	15m³/h	Acrylic shell +fiberglass	L1130xW680 xH1020(mm)	220V 50/60Hz	100W/12V or LED9W/12V	Filter Bag	5-15µm	Wall Mounted	White
M-08	2HP	25m³/h								
M-09	3HP	35m³/h								

INTERGRATIVE SAND FILTER



Dm01 (1300x1240x960)



Dm02 (1580x1480x1200)




Dm03 (1750x1650x1450)

The system combines filtration, circulation, dosing disinfection system as a whole, the built in circulation pumps, quartz sand filter, multi-selecton valve (manual or automatic), automatic dosing devices and other equipment. Integrated machine-room-less design can be installed in the pool around convenient location or buried in the ground without the construction of the room, which reduce construction costs, beautify pool environment. The overall use of special import Box 189 boat water resin (FRP) to process. the UV. Anti-chemical coorosion waterproof air resistance to resistance. High toughness.

Features


- The shell was made of imported fiber glass, which is rugged, corrosin-resistant, anti-UV, anti-chemical corrosive water proof and has characters of chemical resistance, high toughness, suitable for a variety of outdoor weather conditions, low temperature (-40℃--75℃) and outdoor installation
- Smooth surface inside the box at the bottom of the platform has a floor drain and pumps, drainage timely and designed a platform above the bottom of the pump to prevent the pump flooded
- Dual-stage roof design, can fully open (installation and maintenance), but also half-open (operation and running)
- Using compression bar to support the roof, can make you easily open the to cover and secure support from the top cover. It is easy to operation and maintenance
- Thbottom tray design of the box, easy to transport

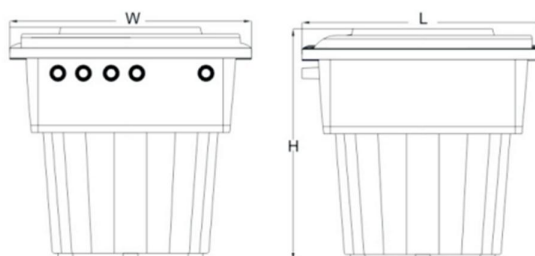

Technical Information

Model	Filter Size	Pump Power (HP)	Flow Rate (m³/h)	Control Valve	Connect Size (mm)	Flow Rate Area (m²)	Size LxWxH (mm)
DMC500	500mm	1	17	manual valve	50	0.2	1300x1240x960
DMC600	600mm	1.2	18	manual valve	50	0.3	1300x1240x960
DMP500	500mm	1	18	automatic valve	50	0.2	1300x1240x960
DMP600	600mm	1.2	25	automatic valve	50	0.3	1300x1240x960
DMF50	SF50 cartridge filter	2	30	manual valve	50	0.64	1300x1240x960
DMF75	SF75 cartridge filter	3	35	manual valve	50	0.79	1300x1240x960
DMC700	700mm	1.5	25	manual valve	50	0.37	1580x1480x1200
DMC800	800mm	2	30	manual valve	63	0.5	1580x1480x1200
DMC900	900mm	2.5	33	manual valve	63	0.64	1580x1480x1200
DMP700	700mm	3	35	automatic valve	50	0.37	1580x1480x1200
DMP800	800mm	1.5	25	automatic valve	63	0.5	1580x1480x1200
DMP900	900mm	2	30	automatic valve	63	0.64	1580x1480x1200
DMC1000	1000mm	2.5	33	manual valve	63	0.79	1750x1650x1450
DMP1000	1000mm	3	35	automatic valve	63	0.79	1750x1650x1450

泳池泵 Swimming Pool Pump




型号 Model No.	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	输入功率P1		重量 (kg)	包装尺寸 Packing size (mm)	装柜数量 Qty/20'
			kW	HP			
SP200	520	18	1.5	2.0	14	635x295x345	435
SP250	600	19	1.85	2.5	15	635x295x345	435
SP300	635	19.2	2.2	3.0	17	635x295x345	435
SP350	670	19.5	2.6	3.5	18.5	635x295x345	435

LX SP 水泵



型号 Model No.	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	输入功率P1		重量 (kg)	包装尺寸 Packing size (mm)	装柜数量 Qty/20'
			kW	HP			
STP150	430	16.5	1.1	1.5	13.5	600x295x345	460
STP200	520	18	1.5	2.0	14	600x295x345	460
STP300	635	19.5	2.2	3.0	17	625x295x434	460
STP350	670	19.5	2.6	3.5	18	625x295x434	460

LX SP 水泵



型号 Model No.	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	输入功率P1		重量 (kg)	包装尺寸 Packing size (mm)	装柜数量 Qty/20'
			kW	HP			
TDA-120	360	10.5	0.95	1.20	9	390x185x225	1750
TDA-150	380	14	1.10	1.50	12	445x220x245	1170
TDA-200	450	15	1.50	2.0	13.5	445x220x245	1170

LX TDA 水泵



型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	输入功率P1		重量 (kg)	包装尺寸 Packing size (mm)	装柜数量 Qty/20'
			kW	HP			
WN-350	320	11	0.75	1.0	8.5	375x180x250	1248
WN-390	390	33.5	0.90	1.2	9	420x185x270	1248

LX WN 水泵

型号




LX 1型 浴缸恒温器

型号 Model	功率/电压 Kw/v	管径 calibre
H15-R1	1.5KW/220V	Φ 50
H20-R2	2KW/220V	Φ 50
H30-R3	3KW/220V	Φ 50

比美CP系列铜泵 “PREMIER” CP Series Brass Pump



VTPR

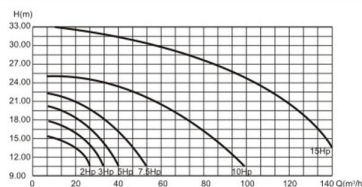

型号 Item No.	长度 Length A(mm)	宽度 Width B(mm)	高度 Height A(mm)	进水口直径 Inlet Ø D(inch)	出水口直径 Outlet Ø E(inch)	电压 Voltage	规格 Specification (HP)	包装尺寸 Package(mm) L x W x H
CP3025	630	205	245	2	2	220V	3	690x290x385
CP2025	630	205	245	2	2	380V	2	690x290x385
CP3030	630	205	245	2	2	380V	3	690x290x385
CP5040	712	266	400	3	2.5	380V	5	765x410x405
CP7550	724	266	400	3	2.5	380V	7.5	765x410x405
CP100100	1060	340	570	4	4	380V	10	1200x460x800
CP150140	1090	340	570	4	4	380V	15	1200x460x800

"BP"系列铸铜水泵 "BP"Series Brass Pump



铜泵 10/15HP

型号 Item No.	长度 Length A(mm)	宽度 Width B(mm)	高度 Height C(mm)	进水口直径 Inlet Ø D(inch)	出水口直径 Outlet Ø E(inch)	相 PH	规格 Specification (HP/V)	包装尺寸 Package(mm) L x W x H
PM-2116	930	360	430	4"	4"	3	20/380	1350x700x700
PM-2116	930	360	430	4"	4"	3	15/380	1250x600x680
PM-2116	900	360	400	4"	3"	3	10/380	1100x500x680
PM-2115	770	300	390	3"	2.5"	3	7.5/380	780x420x440
PM-2115	700	300	390	3"	2.5"	3	5/380	780x420x440
PM-2115	660	200	335	2"	2"	3	3/380	730x270x370

风泵 AIR PUMP



爱克风泵

型号 Item No.	匹数 HP	额定电压 Voltage (V)	最大压力 Max Pressure (Kpa)	正常压力 Normal Pressure (Kpa)	最大风量 Max Flow Air (m³/h)	重量 Weight (Kg)	长 Length (mm)	宽 Width (mm)	高 Height (mm)
APP-100	1.0	380	16	11	100	12.5	294	288	315
APP-200	2.0	380	19	14	150	14.5	294	288	315
APP-300	3.0	380	25	16	200	33	345	360	371
APP-500	5.0	380	32	23	235	37	401	384	403
APP-750	7.5	380	35	26	320	65	410	392	404
APP-1000	10.0	380	42	31	400	121	472	418	453




米兰风泵

型号 Item No.	匹数 HP	额定电压 Voltage (V)	最大压力 Max Pressure (Kpa)	正常压力 Normal Pressure (Kpa)	最大风量 Max Flow Air (m³/h)	重量 Weight (Kg)	长 Length (mm)	宽 Width (mm)	高 Height (mm)
ML-100	1.0	220/380	16	11	100	12.5	294	288	315
ML-200	2.0	220/380	19	14	150	14.5	294	288	315
ML-300	3.0	220/380	25	16	200	33	345	360	371
ML-500	5.0	380	32	23	235	37	401	384	403
ML-750	7.5	380	35	26	320	65	410	392	404
ML-1000	10.0	380	42	31	400	121	472	418	453




型号：爱克APH系列




型号 Model	电压/频率 Voltage/frequency	接管尺寸 Connection Size	转速 Rotational	匹数 HP
APH-100	220V/50Hz	50/63mm 1.5/2inch	2850	1HP
APH-150	220V/50Hz	50/63mm 1.5/2inch	2850	1.5HP
APH-200	220V/380/50Hz	50/63mm 1.5/2inch	2850	2HP
APH-300	220V/380/50Hz	50/63mm 1.5/2inch	2850	3HP



型号：爱克AP系列




型号 Model	额定电压 Voltage (V)	输出功率 Output (KW)	接口尺寸 Port size (mm)	重量 Weight (kg)	长 Length (mm)	宽 Width (mm)	高 Height (mm)
AP-150	220	1.10	50	16	600	275	350
AP-200	220	1.50	50	17	600	275	350
AP-300	220/380	2.20	50	20	610	275	360
AP-350	220/380	2.60	50	21	610	275	360



Product Information & Dimension

Model No	Connection Size	Input power	Horsepower	Weight(kg)
SB10	2 inch 63mm	0.97kW	1.0hp	16.00
SB15	2 inch 63mm	1.30kW	1.5hp	17.00
SB20	2 inch 63mm	1.80kW	2.0hp	23.00
SB30	2 inch 63mm	2.18kW	3.0hp	24.00




Product Information & Dimension

Model No	Connection Size	Input power	Horsepower	Weight(kg)
SC050	1.5 inch 50mm	0.51kW	0.5hp	10.4
SC075	1.5 inch 50mm	0.75kW	0.75hp	12.1
SC100	1.5 inch 50mm	0.97kW	1.0hp	13.4
SC150	1.5 inch 50mm	1.3kW	1.5hp	14.9
SC200	1.5 inch 50mm	1.71kW	2.0hp	15.4



铸铁ATS、AT水泵




型号 Model	额定电压 Voltage (V)	输出功率 Output (KW)	接口尺寸 Port size (mm)	重量 Weight (kg)	长 Length (mm)	宽 Width (mm)	高 Height (mm)
ATS-300	380	2.2	65	46	597	262	360
ATS-400	380	3.0	65	48	597	262	360
ATS-500	380	3.8	65	49	597	262	360
AT-400	380	3.0	80	93	715	332	472
AT-550	380	4.0	80	95	715	332	472
AT-750	380	5.6	80	100	750	332	472
AT-1000	380	7.5	80	110	860	332	472
AT-1500	380	11.0	80	115	860	332	472


SWIMMING POOL SERIES



比美水泵




型号 Item No.	长度 Length A(mm)	宽度 Width B(mm)	高度 Height C(mm)	进水管口径 Inlet Ø D(inch)	出水管口径 Outlet Ø E(inch)	电压 Voltage (V)	规格 Specification	包装尺寸 Package(mm) L x W x H
SP-2810	668	240	280	2	2	220	1.5HP/220V	725x270x355
SP-2815	668	240	280	2	2	220	2HP/220V	725x270x355
SP-3025	668	240	280	2	2	220	3HP/220V	725x270x355
SP-303053	698	240	280	2	2	380	3HP/380V	725x270x355



Product Information & Dimension

Model	Specification	Length A(mm)	Width B(mm)	Height C(mm)	Inlet Ø D(inch)	Outlet Ø E(inch)	Voltage (V)
AS100	1.0HP	600	210	380	2"	2"	220V
AS150	1.5HP	600	210	380	2"	2"	220V
AS200	2.0HP	600	210	380	2"	2"	220V
AS300	3.0HP	600	210	380	2"	2"	220V
AST300	3.0HP	600	210	380	2"	2"	380V





型号 Model	规格 Specification	长度 Length A(mm)	宽度 Width B(mm)	高度 Height C(mm)	进水管口径 Inlet Ø D(inch)	出水管口径 Outlet Ø E(inch)	电压 Voltage (V)
KP1005	1.0HP	635	192	294	2"/63mm	2"/63mm	220V
KP1501	1.5HP	645	192	294	2"/63mm	2"/63mm	220V
KP2003	2.0HP	645	192	294	2"/63mm	2"/63mm	220V
KP3004	3.0HP	645	192	294	2"/63mm	2"/63mm	220V
KPT3002	3.0HP	660	192	294	2"/63mm	2"/63mm	380V

"KP"系列水泵 "KP"Series Pmump



SPV150 220-240V-50Hz/60Hz

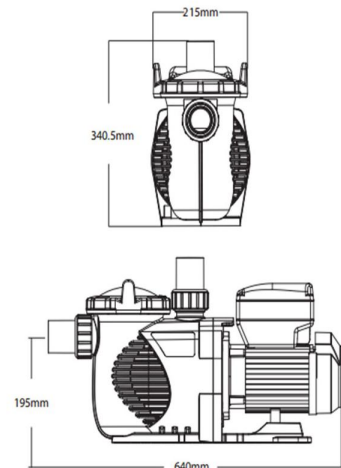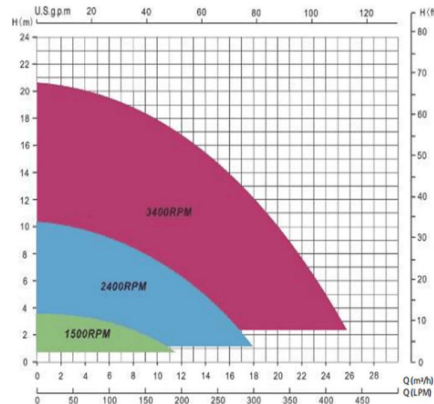

Super Power Variable Speed Pump

Model	Power	Connection Size	Input Power	Horsepower	RPM
SPV150	220-240V, 50Hz/60Hz	1.5" ID / 50mm ID, 2.0" OD / 63mm OD	1.3kW	1.5hp	800-3400




3000型喷浪装置 (Swim Jet 3000)



Swim jet MC3000型

- 喷浪装置的机架以不锈钢制造，前端和把手部分用耐蚀不锈钢 AISI304抛光材料，可装在混凝土、木质或预制板墙壁上。
- 水泵，电动机3kW
- 控制箱由电流接触器和超负荷保护装置组成。
- 空气混合控制
- 空气混合软管
- 软管连接器
- 软管夹
- 吸入端、压出端软管
- 阀

- * Jet Swim house made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting in concrete, wood or building block walls.
- * Lpump power: 3KW
- * Control box including contactor and overload protection
- * Air mixture control
- * Air mixture hose
- * Hose connectors
- * Hose clamps
- * Hose for suction and pressure
- * Valves

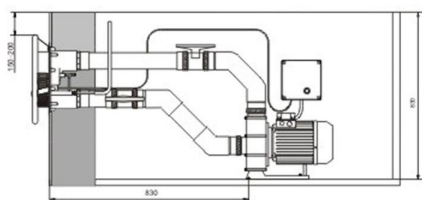

WP-3HP/4HP/220V

Technical Characteristics 参数表

型号 Model	功率 Power (KW)	电压 Voltage (V)	水泵接口 Pump Connection (mm)	喷水量 water capacity (L/Min)	材质 Jet Material
MC3000	3	380	Ø75	70	铜、不锈钢 bronze、stainless steel
MC2000	2.18	220	Ø63	35	不锈钢 stainless steel
MC1000	2.2	220	Ø75	50	ABS

过滤沙缸系列 SAND FILTER SERIES






2000型喷浪装置 (Swim Jet 2000)



Swim jet MC2000型

- 喷浪装置的机架以不锈钢制造，前端和把手部分用耐蚀不锈钢 AISI304抛光材料，可装在混凝土、木质或预制板墙壁上。
- 水泵，电动机3kW
- 控制箱由电流接触器和超负荷保护装置组成。
- 空气混合控制
- 空气混合软管
- 软管连接器
- 软管夹
- 吸入端、压出端软管
- 阀



- * Jet Swim house made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting in concrete, wood or building block walls.
- * Lpump power: 3KW
- * Control box including contactor and overload protection
- * Air mixture control
- * Air mixture hose
- * Hose connectors
- * Hose clamps
- * Hose for suction and pressure
- * Valves

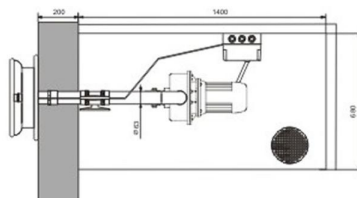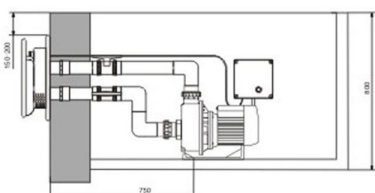

1000型喷浪装置 (Swim Jet 1000)



Swim jet MC1000型

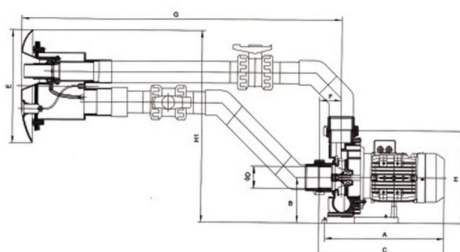


Pulsating massage hose



Air pipe




Control switch

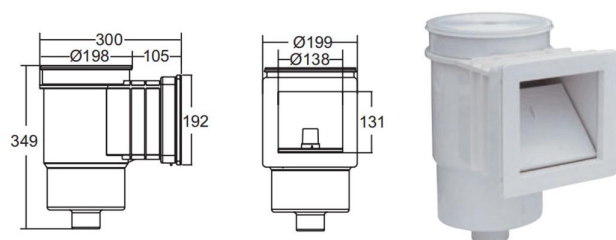


Skimmer

Model	Colour	Material	Annotation	Connection
EM0010-RV	White	ABS	Vinyl Pool	1.5"
EM0010-RC	White	ABS	Concrete Pool	1.5"

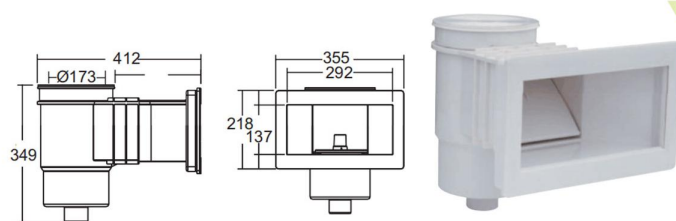


Skimmer

Model	Colour	Material	Annotation	Connection
EM0020-RV	White	ABS	Vinyl Pool	1.5"
EM0020-RC	White	ABS	Concrete Pool	1.5"

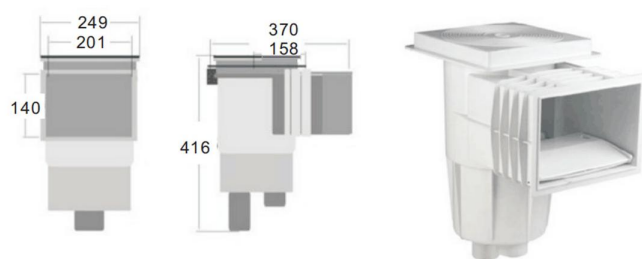

Skimmer

Model	Colour	Material	Annotation	Connection
MC0030-RV	White	ABS	Vinyl Pool	1.5"
MC0030-RC	White	ABS	Concrete Pool	1.5"

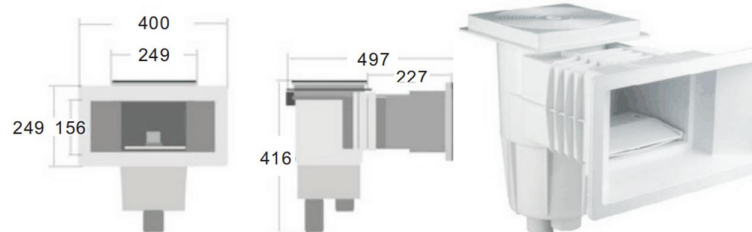


Skimmer

Model	Colour	Material	Annotation	Connection
MC0040-RV	White	ABS	Vinyl Pool	1.5"
MC0040-RC	White	ABS	Concrete Pool	1.5"




Skimmer


Model	Colour	Material	Annotation	Connection
MC0050-RV	White	ABS	Vinyl Pool	1.5"
MC0050-RC	White	ABS	Concrete Pool	1.5"

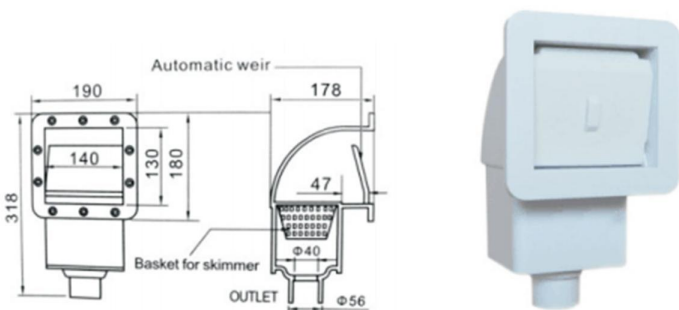

Skimmer


Model	Colour	Material	Annotation	Connection
MC0060	White	ABS	Concrete Pool	1.5"

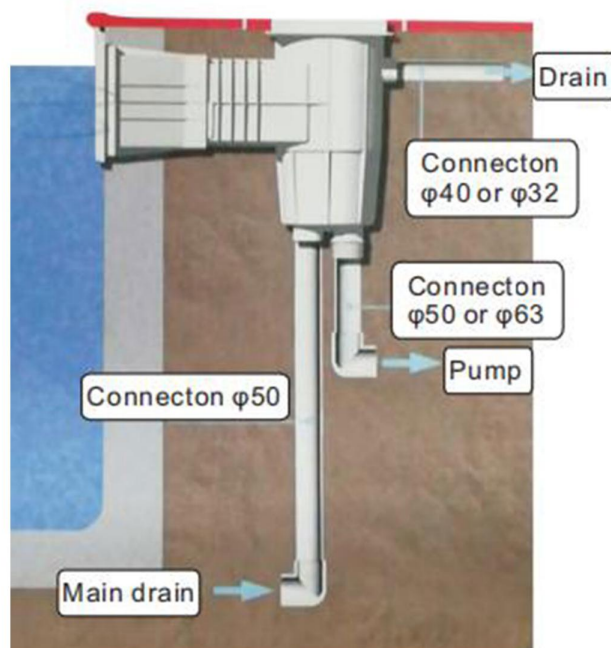




Massage Jet

Model	Colour	Material	Flow Quantity(L/min)
MC - 1434	White	ABS	300




Wall Return

Model	Colour	Material	Flow Quantity(L/min)
MC- 1424	White	ABS	400




Suction Fitting

Model	Colour	Material	Flow Quantity(L/min)
MC- 1022B	White	ABS	600




Massage Jet

Model	Colour	Material	Connection
MC - 2852	White	ABS	2"




Massage Jet

Model	Colour	Material	Connection
MC - 2851	White	ABS	2" thread




Suction Fitting

Model	Colour	Material	Connection
MC - 2854	White	ABS	2"




Suction Fitting

Model	Colour	Material	Connection
MC - 2853	White	ABS	2" thread




Massage Jet

Model	Colour	Material	Annotation	Connection
MC - 1006V	White	ABS	Vinyl Pool	2" thread

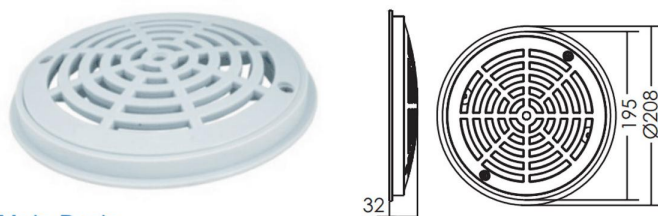


Main Drain

Model	Colour	Material	Flow Quantity(L/min)
MC- 1030	White	ABS	558

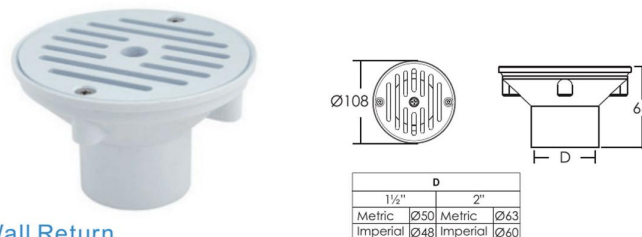


Wall Return

Model	Colour	Material	Flow Quantity(L/min)
MC- 1424	White	ABS&PVC	150(1.5") / 240(2.0")

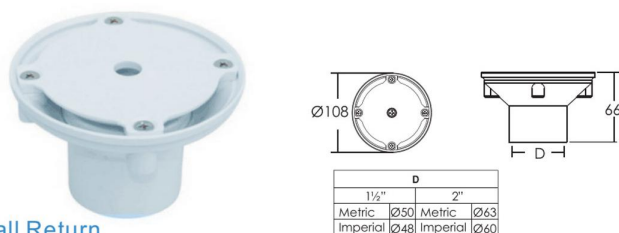


Wall Return

Model	Colour	Material	Flow Quantity(L/min)
MC- 2825	White	ABS&PVC	150(1.5") / 240(2.0")

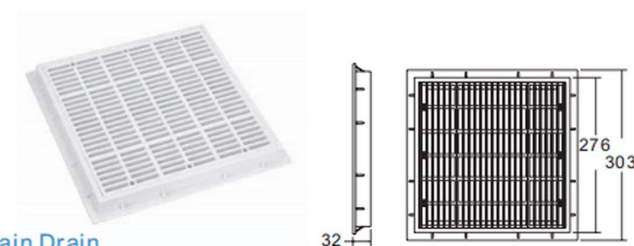

Main Drain

Model	Colour	Material	Flow Quantity(L/min)
MC- 1032	White	ABS	850

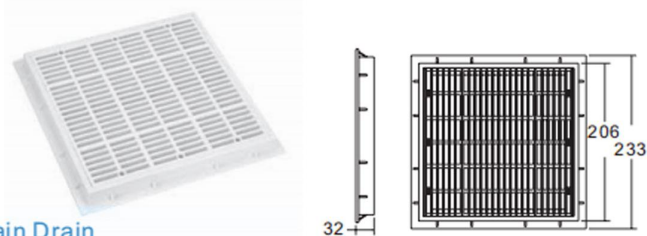

Main Drain

Model	Colour	Material	Flow Quantity(L/min)
MC- 1031	White	ABS	850



Main Drain

Model	Colour	Material	Connection
MC- 2850	White	ABS	2"



Main Drain


Model	Colour	Material	Annotation	Connection
MC- 2850V	White	ABS	Vinyl Pool	2"



Main Drain


Model	Colour	Material	Annotation	Connection
MC- 2832V	White	ABS	Vinyl Pool	1.5"

SWIMMING POOL SERIES




Suction Fitting

Model	Colour	Material	Connection	Flow Quantity(L/min)
MC- 2827	White	ABS&PVC	2" thread	150




Massage Jet

Model	Colour	Material	Connection	Flow Quantity(L/min)
MC- 2828	White	ABS&PVC	2" thread	69




Suction Fitting

Model	Colour	Material	Annotation	Connection	Flow Quantity(L/min)
MC- 2827V	White	ABS&PVC	Vinyl Pool	2" thread	150




Massage Jet

Model	Colour	Material	Annotation	Connection	Flow Quantity(L/min)
MC- 2828V	White	ABS&PVC	Vinyl Pool	2" thread	69




Wall Return

Model	Colour	Material	Flow Quantity(L/min)
MC- 1424	White	ABS&PVC	150(1.5") / 240(2.0")




Wall Return

Model	Colour	Material	Flow Quantity(L/min)
MC- 2825	White	ABS&PVC	150(1.5") / 240(2.0")




Gutter Drain

Model	Colour	Material	Flow Quantity(L/min)
MC- 1019	White	ABS&PVC	150(1.5") / 240(2.0")

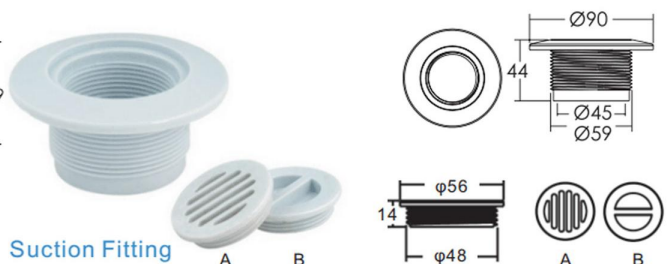


Suction Fitting

Model	Colour	Material	Connection	Flow Quantity(L/min)
MC- 1022A/B	White	ABS&PVC	2" thread	150



Massage Jet


Model	Colour	Material	Connection
MC-1450T	White	ABS&PVC	1.5"



Massage Jet

Model	Colour	Material	Flow Quantity(L/min)
MC-1434	White	ABS&PVC	150(1.5")


1 1/2"	A B	1 1/2"	A B
Metric	Ø50	Imperial	Ø48



Water Tee Body


Model	Colour	Material	Flow Quantity(L/min)
MC-0031	White	ABS&PVC	150(1.5")

1 1/2"	A	B	1 1/2"	A	B
Metric	Ø50	Ø33	Imperial	Ø48	Ø33




Massage Jet

Model	Colour	Material	Flow Quantity(L/min)
MC-0028	White / Grey	ABS	17



Massage Jet

Model	Colour	Material	Flow Quantity(L/min)
MC-0064	White / Grey	ABS	17



Junction Box

Model	Colour	Material	Flow Quantity(L/min)
MC-0034	White	ABS	/



SP0022A
电机气动开关
Motor pneumatic switch



SP0022
塑料镀铬开关
Plastic chrome plating switch



SP0023
塑料调节开关
plastic adjust switch



Main Drain



Connector 直接
B-158
White 白色, 3/4"



F03 - Tee 三通
Size: DN50, DN63
SOCKET



F09 - 90 degree Elbow 弯头
Size: DN50, DN63
SOCKET



N103
外牙组
1.5", 2"



Non-return valve
单向止回阀
A-128



F71-Double Union Ball Valve 球阀
Size: 1/2" TO 4" THREAD, SOCKET
1/2"-2": 235psi Max, 2"-1/2"-4": 150psi Max.



F61-Single Union Ball Valve 球阀
Size: 1/2" - 2" THREAD, SOCKET
235psi Max.



F-62
蝶阀



Non-0324
回水口连接件



N101
内牙组
1.5", 2"



N102
变径
2"-1.5", 1.5"-1"




N104
PVC 水管
2", 1.5", 1"



Non-return valve
单向止回阀
A-127 white 白色 2"


90°Corner Tile For Grating 90°格栅转角砖



Model	A	H	L
PT3090	350	28.5	300
PT2590	300	28.5	250
PT1890	250	28.5	200

Model No 型号	Specification 规格
PT3090	300-90°Fiberglass Corner Tile (White) 玻璃纤维转角砖 (白色)
PT2590	250-90°Fiberglass Corner Tile (White) 玻璃纤维转角砖 (白色)
PT1890	200-90°Fiberglass Corner Tile (White) 玻璃纤维转角砖 (白色)

45°Corner Tile For Grating 45°格栅转角砖



Model	A	B	H	L
PT3045	174	50	28.5	300
PT2545	154	50	28.5	250
PT1845	133	50	28.5	200

Model No 型号	Specification 规格
PT 3045	300-45°Fiberglass Corner Tile (White) 玻璃纤维转角砖 (白色)
PT 2545	250-45°Fiberglass Corner Tile (White) 玻璃纤维转角砖 (白色)
PT 1845	200-45°Fiberglass Corner Tile (White) 玻璃纤维转角砖 (白色)



Check Valve



Wall Pipe



SP0022
不锈钢吸污口2"螺纹
SS suction nozzle(screw)



SP0024
不锈钢回水器2"螺纹
SS water return(screw)




SP0029
不锈钢溢水口2"螺纹
SS gutter drain(screw)



SP0015
铜地漏
copper floor drain
Φ50/Φ63/Φ75/Φ90

I shape pool grating

Size: 18cm/ 20cm/ 25cm/ 30cm
Material: PP plastic
Color: white




Singe plug style grating

Size: 18cm/ 20cm/ 25cm/ 30cm
Material: ABS plastic
Color: bone



Tooth shape grating

Size: 18cm/ 20cm/ 25cm/ 30cm
Material: PP plastic
Color: white



Flexible wave shape three plug grating

Size: 18cm/ 20cm/ 25cm/ 30cm
Material: ABS/PPS plastic
Color: white/ bone




Flexible wave three plug grating

Size: 18cm/ 20cm/ 25cm/ 30cm
Material: PPS plastic
Color: white/ bone



Anti-skid mat

Size: 1x10m 10m/roll
Packing size: 41x41x103cm
Color: white

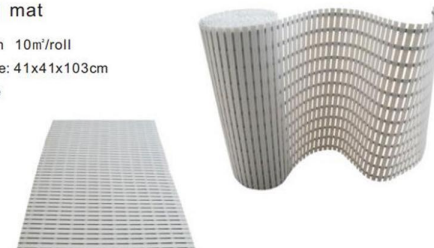

SWIMMING LANE LINE (泳道线)

泳道线是泳池场馆中进行泳池比赛与训练的必备器材，以前高档泳池道线主要依赖进口，而中国内外各种泳道线的优点，自主研发出新一代泳道线，供各游泳场馆选用。本厂泳道线款式新颖，做工精良，色泽鲜艳，抗紫外线抗氧化作用，消波压浪、自浮力强、易于安装、方便实用，还可以用作划分深浅水域的明显标志，使运动员获得最佳的比赛环境。

特点&优势：

- 1、我厂泳道线外形构思新颖，美观大方，色泽鲜艳，浮力设计根据水力原理设计，在整个泳道线的长度内，通过浮标吸收水波的能量，起到消波阻浪的作用。
- 2、材料：选用全新高密度低压聚乙烯原料加工，添加了防紫外线耐晒剂和抗衰剂大大延长了泳道线的使用寿命。
- 3、配件：304#钢丝绳、(尼龙绳)和收紧器、拉钩、挂钩预埋装置都采用不锈钢材料。



Φ15cm风车形泳道线防划伤

直径Diameter: Φ15cm

长度Length: 25m, 50m

颜色Color: 红, 蓝, 黄三种色 (颜色和长度可订做)



Φ15cm六棱形泳道防划伤

直径Diameter: Φ15cm

长度Length: 25m, 50m

颜色Color: 红, 蓝, 白三种色 (颜色和长度可订做)



Φ11cm圆弧形泳道线防划伤

直径Diameter: Φ11cm

长度Length: 25m, 50m

颜色Color: 红, 蓝, 黄三种色 (颜色和长度可订做)



Φ11cm圆弧形泳道线防划伤

直径Diameter: Φ11cm

长度Length: 25m, 50m

颜色Color: 橘红, 蓝, 黄三种色 (颜色和长度可订做)



Φ12cm六棱形泳道线防划伤

直径Diameter: Φ12cm

长度Length: 25m, 50m

颜色Color: 红, 蓝, 黄三种色 (颜色和长度可订做)



螺旋形泳道线防划伤

直径Diameter: Φ6cm L; 20cm

长度Length: 25m, 50m

颜色Color: 红, 蓝, 白三种色 (颜色和长度可订做)



红色塑料收紧器



SP-1042不锈钢泳线收紧器
专利号: ZL 2008 3 0052483.5



SP-1043A
红色带防护套加重型收紧器




SP-1040A挂钩位



SP-1040泳线池身挂钩位



SP-1039不锈钢泳线拉钩

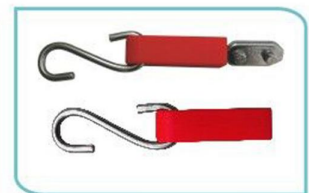

SP-1043B 红色带防护套拉钩



安全浮法线



浮波



固定栓



穿绳棒



浮波钩



白+蓝编织绳

安装说明



01



02



03



04



05



06




07



08




09

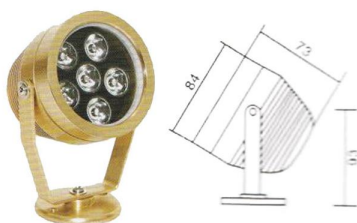


MC6601

Material: AISI0-304 Stainless Steel
Watt/Voltage: 3W/6W/12V
Waterproof: IP68

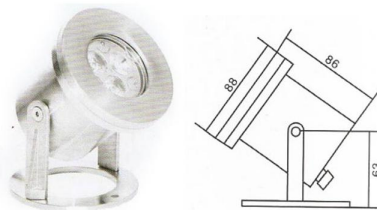


MC6602

Material: AISI0-304 Stainless Steel
Watt/Voltage: 35-50w/3*1W/3*3W/12V
Waterproof: IP68

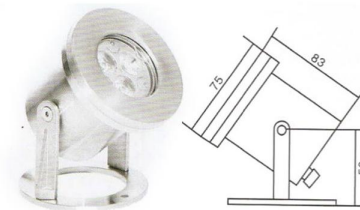


MC6603

Material: AISI0-304 Stainless Steel
Watt/Voltage: 35-50w/3*1W/3*3W/12V
Waterproof: IP68




MC6604

Material: AISI0-304 Stainless Steel
Watt/Voltage: 9*1W/12*1W/12V
Waterproof: IP68




MC6605

Material: AISI0-304 Stainless Steel
Watt/Voltage: 9*1W/12V
Waterproof: IP68

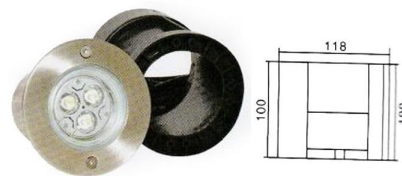


MC6606

Material: AISI0-304 Stainless Steel
Watt/Voltage: 35-50W/3*1W/3*3W/12V
Waterproof: IP68



MC6607

Material: AISI0-304 Stainless Steel
Watt/Voltage: 6W/12V
Waterproof: IP68




MC6608

Material: AISI0-304 Stainless Steel
Watt/Voltage: 6*1W/9*1W/12*1W/12V
Waterproof: IP68




MC6609

Material: AISI0-304 Stainless Steel
Watt/Voltage: 1W/3W/12V
Waterproof: IP68




MC6610

Material: AISI0-304 Stainless Steel
Watt/Voltage: 3*1W/12V
Waterproof: IP68

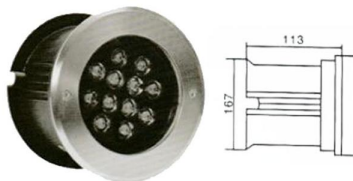

MC6611

Material: AISI0-304 Stainless Steel
Watt/Voltage: 12*1W/18*1W/12*3W/12V
Waterproof: IP68




MC6612

Material: AISI0-304 Stainless Steel
Watt/Voltage: 6*1W/9*1W/12*1W/12V
Waterproof: IP68




MC6016C

Material: ABS+UV
 Watt/Voltage: 1.300W/12V halogen light bulb
 2.144 led bulbs 10W/12V(RGB or Single color)
 3.252 led bulbs 18W/12V(RGB or Single color)
 4.LED 12*1W/12V(RGB or Single color)
 5.LED 18*1W/12V(RGB or Single color)
 6.LED 24*1W/12V(RGB or Single color)
 Waterproof: IP68

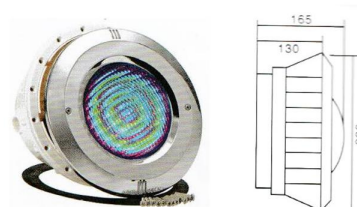


MC6016AV

Material: ABS+UV
 Watt/Voltage: 1.300W/12V halogen light bulb
 2.144 led bulbs 10W/12V(RGB or Single color)
 3.252 led bulbs 18W/12V(RGB or Single color)
 4.LED 12*1W/12V(RGB or Single color)
 5.LED 18*1W/12V(RGB or Single color)
 6.LED 24*1W/12V(RGB or Single color)
 Waterproof: IP68

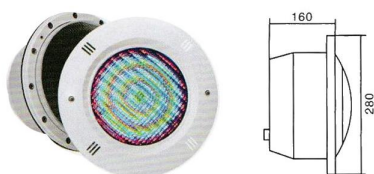


MC6017C

Material: ABS+UV
 Watt/Voltage: 1.300W/12V halogen light bulb(Par56)
 2.144 led bulbs 10W/12V(RGB or Single color)
 3.252 led bulbs 18W/12V(RGB or Single color)
 4.LED 12*1W/12V(RGB or Single color)
 5.LED 18*1W/12V(RGB or Single color)
 6.LED 24*1W/12V(RGB or Single color)
 Waterproof: IP68

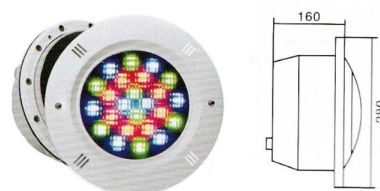

MC6017AV

Material: ABS+UV
 Watt/Voltage: 1.300W/12V halogen light bulb(Par56)
 2.144 led bulbs 10W/12V(RGB or Single color)
 3.252 led bulbs 18W/12V(RGB or Single color)
 4.LED 12*1W/12V(RGB or Single color)
 5.LED 18*1W/12V(RGB or Single color)
 6.LED 24*1W/12V(RGB or Single color)
 Waterproof: IP68

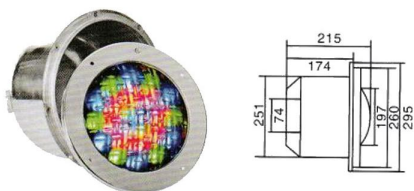

MC6011


Material: Stainless Steel 304
 Watt/Voltage: 1.300W/12V halogen light bulb(Par56)
 2.144 led bulbs 10W/12V(RGB or Single color)
 3.252 led bulbs 18W/12V(RGB or Single color)
 4.LED 12*1W/12V(RGB or Single color)
 5.LED 18*1W/12V(RGB or Single color)
 6.LED 24*1W/12V(RGB or Single color)
 Waterproof: IP68



MC6010

Material: Stainless Steel 304
 Watt/Voltage: 1.300W/12V halogen light bulb(Par56)
 2.144 led bulbs 10W/12V(RGB or Single color)
 3.252 led bulbs 18W/12V(RGB or Single color)
 4.LED 12*1W/12V(RGB or Single color)
 5.LED 18*1W/12V(RGB or Single color)
 6.LED 24*1W/12V(RGB or Single color)
 Waterproof: IP68

MC003 wall mounted type pool light

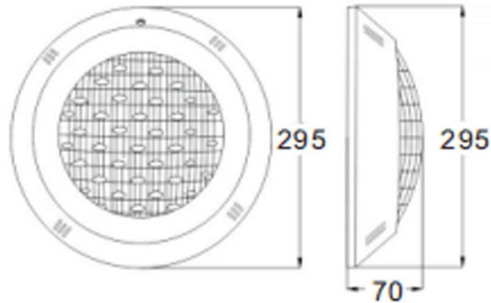


Material: ABS+UV

Available:

1. 100W/12V Halogen light bulb
2. 144 LED Bulbs 15W/12V
(White color / Auto color change)
3. 252 LED Bulbs 25W/12V
(White color / Auto color change)
4. LED 9x1W/12V
(White color / Auto color change)
5. LED 12x1W/12V
(White color / Auto color change)
6. LED 18x1W/12V
(White color / Auto color change)

Cable: 2 x 1.5mm² x 1.5m
Waterproof standard: IP68

MC004 wall mounted type pool light

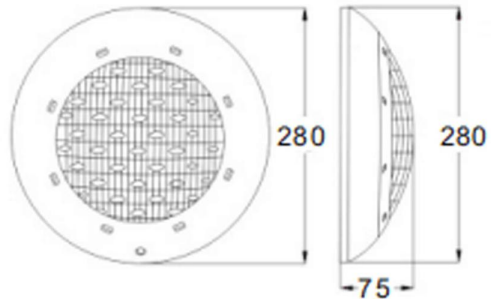


Material: ABS+UV

Available:

1. 100W/12V Halogen light bulb
2. 144 LED Bulbs 15W/12V
(White color / Auto color change)
3. 252 LED Bulbs 25W/12V
(White color / Auto color change)
4. LED 9x1W/12V
(White color / Auto color change)
5. LED 12x1W/12V
(White color / Auto color change)
6. LED 18x1W/12V
(White color / Auto color change)

Cable: 2 x 1.5mm² x 1.5m
Waterproof standard: IP68

MC005 wall mounted type pool light

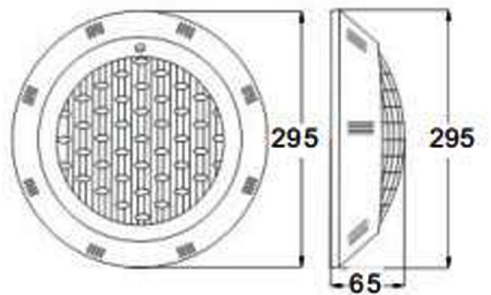


Material: ABS+UV

Available:

1. 100W/12V Halogen light bulb
2. 144 LED Bulbs 15W/12V
(White color / Auto color change)
3. 252 LED Bulbs 25W/12V
(White color / Auto color change)
4. LED 9x1W/12V
(White color / Auto color change)
5. LED 12x1W/12V
(White color / Auto color change)
6. LED 18x1W/12V
(White color / Auto color change)

Cable: 2 x 1.5mm² x 1.5m
Waterproof standard: IP68

MC001 wall mounted type pool light

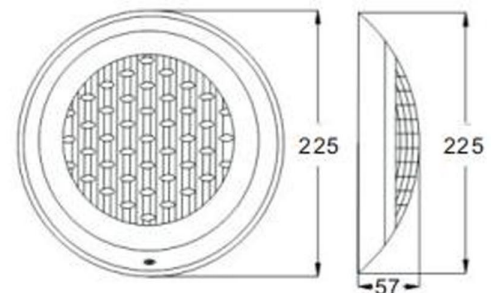


Material: Stainless Steel 304

Available:

1. 100W/12V Halogen light bulb
2. 96 LED Bulbs 10W/12V
(White color / Auto color change)
3. 144 LED Bulbs 15W/12V
(White color / Auto color change)

Cable: 3 x 1.5mm² x 1.5m
Waterproof standard: IP68

MC002 wall mounted type pool light

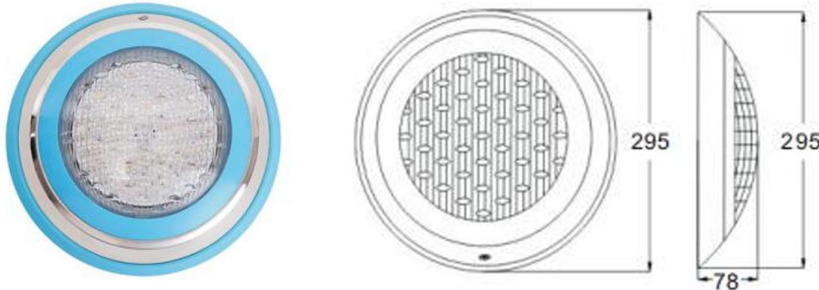

Material: Stainless Steel 304
 Available:
 1. 100W/12V Halogen light bulb
 2. 144 LED Bulbs 15W/12V
 (White color / Auto color change)
 3. 252 LED Bulbs 25W/12V
 (White color / Auto color change)
 Cable: 3 x 1.5mm² x 1.5m
 Waterproof standard: IP68

MC006 wall mounted type pool light





Material: ABS+UV
 Available: 18W 252bulbs
 35W 441bulbs
 1x12W
 1x18W
 1x24W
 1x35W

MC007 wall mounted type pool light



Material: Stainless Steel 304
 Available: 10W 144bulbs
 18W 252bulbs
 1x9W
 1x12W
 1x18W
 1x24W

Acrylic Pool Fountain

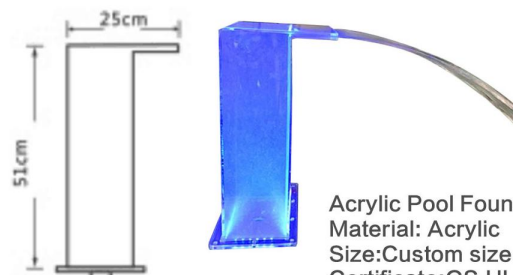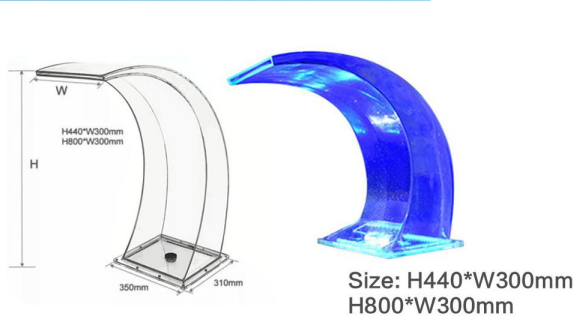

Acrylic Pool Fountain
 Material: Acrylic
 Size: Custom size available
 Certificate: GS, UL, SAA, RoHS, BS
 Led Light: Automatic Changing-color




VIBRANT COLORFUL WATERFALL

Make your pool alive!


Water Descent is one of the most beautiful ornamental features for your pool or spa. Creating a water movement in your pool, it may be adjusted from a peaceful sheet of water falling into the pool, to a relaxing water massage for your back, adding elegance and style to your pool.

To make you more clear of our waterfall installation, here the instruction for your reference.

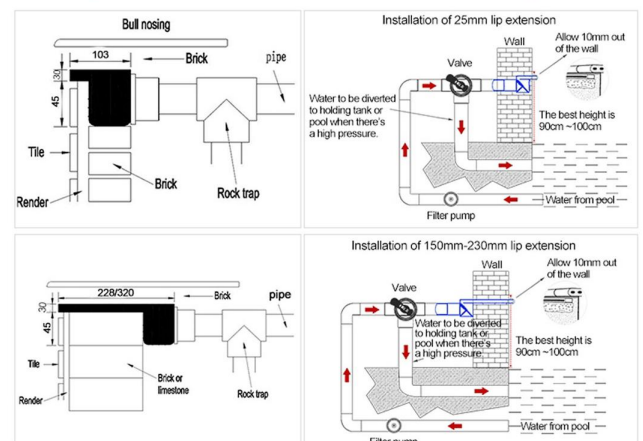

Available in five different models, you can enjoy different water effects and trajectories, from our standard water fall, to rain sheer or arc trajectory. With the optional RGB LED strip, the unit provides you vibrant colorful waterfall which adds visual interest and the soothing sound of flowing water to your landscape. 10 selections of pre-programmed LED lighting pattern allow you to create the best luminous water features on your hands.

Acrylic material

MC300	Acrylic material Water spillway, gray color/black color/transparent acrylic material ,different length size,lip length 135mm or length 30mm	300mm, with 4W LED light strip with remote controller and transformer and 8meter cable
MC450		450mm, with 6W LED light strip with remote controller and transformer and 8meter cable
MC600		600mm, with 8W LED light strip with remote controller and transformer and 8meter cable
MC900		900mm, with 12W LED light strip with remote controller and transformer and 8meter cable
MC1200		1200mm, with 16W LED light strip with remote controller and transformer and 8meter cable
MC1500		1500mm, with 20W LED light strip with remote controller and transformer and 8meter cable
MC300N		300mm without light
MC450N		450mm without light
MC600N		600mm without light
MC900N		900mm without light
MC1200N		1200mm without light
MC1500N		1500mm without light

SW300	Stainless Steel waterfall cascade, lip Length 30mm	300mm, with 4W LED light strip with remote controller and transformer and 8meter cable
SW450		450mm, with 6W LED light strip with remote controller and transformer and 8meter cable
SW600		600mm, with 8W LED light strip with remote controller and transformer and 8meter cable
SW900		900mm, with 12W LED light strip with remote controller and transformer and 8meter cable
SW1200		1200mm, with 16W LED light strip with remote controller and transformer and 8meter cable
SW1500		1500mm, with 20W LED light strip with remote controller and transformer and 8meter cable
SW300N	 Color Changing Steel Elegance Lighted Spillway  LED Lights Long Lasting, Low Energy	300mm without light
SW450N		450mm without light
SW600N		600mm without light
SW900N		900mm without light
SW1200N		1200mm without light
SW1500N		1500mm without light

Cleaning equipment 清洁工具



PVH01
三角吸池头
Triangular Liner Vac Head w /Swivel Cuff




PVH06
透明三角吸池头
Deluxe triangular transparent cast iron weighted vac head



PVH07
新款吸池头
Vac Head w/Side Brushes



PVH03
吸池头
Vac Head w/Side Brushes



PVH09
14"吸池头
Flexible Vac Head w / Swivel Brush For IG Pool(Blue)



PVH08
14"吸池头
Flexible Vac Head For In-ground Pool (Blue)



PV05
14" 铝合金吸污头
14" Vacuum head



PV03
14-19" 铝合金吸污头
14-19" Vacuum head



PVH17
Deluxe Vacuum Brush w/Easy Button



PVH18
Deluxe Vacuum Head w/Transparent Cover &Easy Button



PVH16
19"吸池头
Deluxe Pentagonal Vacuum Head w/Easy Button



PVH20/18"
18" Aluminium Folding Vacuum Head w/4 Folding Panels



PVH23/18"
18" Economy Aluminium Vacuum Head



PLS02
Professional Aluminium Leaf Skimmer



PLS1001
Deluxe Leaf Skimmer w/Easy Button



PDRS1001
Deluxe Deep Rake w/Easy Button



PDRS05
Professional Heavy Duty Deep Rake w/Alu Frame



PDRS10
Professional Deluxe Deep Rake w/Squeegee Strip and Replaceable Net



PLS01
标准浅网
Standard leaf Skimmer (Blue)



PDRS04
标准深网
Economy deep bag rake



PDRS01
加强型深网
Heavy duty plastic leaf rake with long wearing screen mesh



PLS03
加强型浅网
Heavy Duty Plastic Leaf Skimmer (Blue)



PLSH02
三节杆浅网
Leaf Skimmer with 48"/122cm Aluminium Pole

SWIMMING POOL SERIES



Cleaning equipment 清洁工具



PB04
Oversized Polybristle
Wall Brush w/EZ-clip



PB11
18"/45cm Metal
Back wall Brush



PB01
池刷
18"/45cm Deluxe Wall
brush w/ polished Alu Back



PB02
池刷
18"/45cm Standard
Curved Wall Brush



PB03
Flexible Brush w/
Alu Handle & Extra Bristles



PB05
10"/26cm Polybristle
Wall Brush



PB06
10"/26cm Stainless
Steel Algae Brush



PB07
10"/26cm Polybristle
Wall Brush w/alu
Handle and EZ-Clip



PD01
9" 药丸浮
Deluxe Large Chemical
Dispenser for 3" Tablets



PT13
Large Scale Floating
Dial Thermometer



PT05
Deluxe Round
Thermometer w/String



PT08
Jim Buoy
Thermometer w/String



PT11
Floating Animal
Thermometer in 4 styles



PTK02
PH.OTO



PTK01
标准验水盒
Basic pH & Cl Test Kit (20cc)



PTK05
豪华型验水盒
5-Way Test Kit (pH/Cl/Alkalinity/
Acid Demand/Bromine)



PHR01
Hose Reel without Hose



VTP-360
5m/7m/8m/9m 两节吸池用铝竿
Telescopic Pole



VTP-361
专用救生勾
Life Saving Hook



VTP-362
9/12/15/30米吸池喉
Vacuum Hose



VTP-363
9/12/15/30米泳池吸污双层喉
Vacuum Hose



名称:虎鲸牌全自动泳池清洗机
型号:HJ2012
功率:450W
工作电压:220V
水下电压:24V
清洗速度:12m/分
线长:40m
体积:990*460*240mm

Technical parameters

1. 输入电压 Rated input voltage	AC(交流)100V-240V
2. 频率 Frequency	50Hz/60Hz
3. 输出电压 Output voltage	DC(直流)24V
4. 功耗 Power consumptin	≤600W
5. 工作电流 Operating current	18-20A(AC直流 24V)
6. 工作周期 Working cycle	3/5 小时 hours
7. 电缆长度 Cable length	20m/25m
8. 清洁带宽度 Cleaning band width	340mm
9. 最大清洗面积 Maximum cleaning	980m ²
10. 滤水量 Filtering capacity	13m ³ /小时 hours
11. 过滤能力 Filtering capability	10um-100um
12. 使用温度范围 OTR	10°C-40°C
13. 爬行速度 Creeping speed	12m/分
14. 重量 Weight	14.5kg
15. 体积 CBM	495x460x240 mm
16. 保修 Warranty	1年 years



名称:虎鲨全自动泳池清洗机
型号:TigerShark2 Plus
功率:300W
工作电压:220V
水下电压:24V
清洗速度:12m/分
线长:30m
体积:500*460*380mm



名称:美国彩鲨自动泳池清洗机
型号:SharkVac XL
参数:水下电压:24V
功率:250W
过滤精度:5微米
重量:12.35kg
电源线长:22m
计算地面速度:16.76米/分钟
处理水量:17m³/h



名称:虎鲸牌全自动泳池清洗机
型号:HJ2028-20
功率:450W
工作电压:220V
水下电压:24V
清洗速度:12m/分
线长:20m\30m\40m
体积:495*460*240mm



名称:皇帝全自动泳池清洗机
型号:KingShark2
功率:375W
工作电压:220V
水下电压:220V
清洗速度:12m/分
线长:45.7m
体积:73.6cm*60cm*38.1cm



名称:美国彩鲨自动泳池清洗机
型号:SharkVac
参数:水下电压:24V
功率:250W
过滤精度:5微米
重量:12.35kg
电源线长:22m
计算地面速度:16.76米/分钟
处理水量:17m³/h



美国“海豚”2002#
线长20米，无线遥控器
可编程，爬墙
"Dolphin" 2002# USA
Wire length 20m, remote control,
Programmable, Parcourir



美国“海豚”3002#
线长30米，无线遥控器
可编程，爬墙
"Dolphin" 3002# USA
Wire length 30m, remote control,
Programmable, Parcourir



美国“海豚”2x2#
线长45米，奥林匹克泳池的最佳选择
带无线遥控器，可编程
"Dolphin" 2x2# USA
Wire length 45m, The Olympic Swimming Pool
optimal choice, remote control,
Programmable



“虎鲸”HJ2012
线长20m/25m、15.5m□/h
标准泳池（配遥控）




“虎鲸”HJ2028
线长20m/25m



“虎鲸”HJ-2000A
泳池自动吸污机
Automatic cleaning machine




手动清洁一体机
Manual cleaning machine





SF扶梯

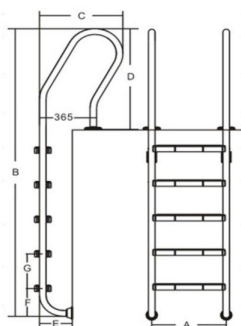


SF 型不锈钢扶梯 SF Series Stainless Steel Pool Ladder

型号	A	B	C	D	E	F	G	包装尺寸mm
SF-215	502	1330	650	640	180	200	250	1430x710x60
SF-315	502	1580	650	640	180	200	250	1680x710x60
SF-415	502	1830	650	640	180	200	250	1930x710x60
SF-515	502	2080	650	640	180	200	250	2180x710x60



SL扶梯

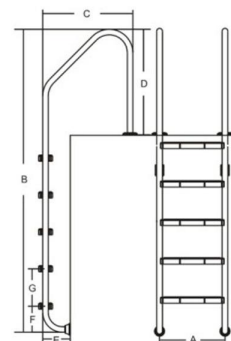


SL 型不锈钢扶梯 SL Series Stainless Steel Pool Ladder

型号	A	B	C	D	E	F	G	包装尺寸mm
SL-215	502	1330	650	640	180	200	250	1430x710x60
SL-315	502	1580	650	640	180	200	250	1680x710x60
SL-415	502	1830	650	640	180	200	250	1930x710x60
SL-515	502	2080	650	640	180	200	250	2180x710x60



MU扶梯



扶梯踏板

MU型不锈钢扶梯

型号	A	B	C	D	E	F	G	包装尺寸mm
MU-215	502	1330	365	640	180	200	250	1430x420x60
MU-315	502	1580	365	640	180	200	250	1680x420x60
MU-415	502	1830	365	640	180	200	250	1930x420x60
MU-515	502	2080	365	640	180	200	250	2180x420x60

救生椅及救生圈



普通型救生椅
Life-Gaurd chair



组合式救生椅(豪华型)
Life-Gaurd chair




救生衣
Life clothe



救生圈
Life buoys



救生圈
Life buoys

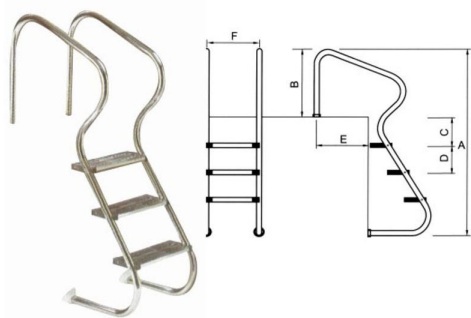

SS ladders diameter 42mm polishing stainless steel ladders, stainless steel tread. Perfect curve designs. The surface is antislippery. No minor faults with sharp side cape, fixed equipment.

型号 Item No.	Tread	Diameter mm	G.W kg	Ctn. Qty.	Volume m³	Dimension mm
ST-342	3	4.2	21.6	1	0.101	1000x55x1837
ST-442	4	4.2	25.9	1	0.115	1000x55x2085



SA 双面扶梯 SA Two-side Ladder

Item No.	Step	A	B	C	D	E	F
SA2+2	2+2	1150	1380	250	730	420	500
SA3+3	3+3	1150	1580	250	930	420	500
SA4+4	4+4	1360	1880	250	1230	420	500
SA4+4	4+4	1360	1900	250	1350	420	500
SA5+5	5+5	1700	2120	250	1530	420	500

扶手 Handrail



扶手 Handrail
470x800mm



扶手 Handrail
470x800mm



扶手 Handrail
800x800mm



扶手 Handrail
1250x800mm



扶手 Handrail
1120x1480mm




不锈钢扶手
Handrail


Starting blocks 一级和二级标准出发台



泳池一级出发台



二级跳台





一级和二级标准出发台 Starting blocks


名称 Description	材料 Material	颜色 Color	重量 Weight (kg)	尺寸 Dimension (mm)
标准一级出发台 Standard one-step starting block	不锈钢 Stainless steel 304 & FRP	天蓝色 Azury	20	520 x 520 x 450
标准二级出发台 Standard two-step starting block	不锈钢 Stainless steel 304 & FRP	天蓝色 Azury	26	520 x 520 x 650




瀑布美人鱼
Model No:M01

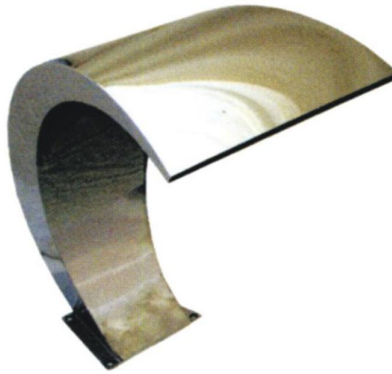


眼镜蛇瀑布
Model No:M02

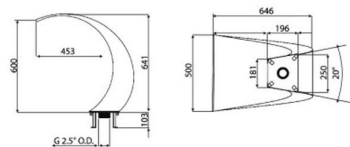


海豚瀑布
Model No:M03

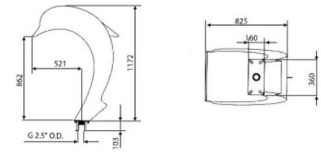


梯级瀑布
Model No:M04

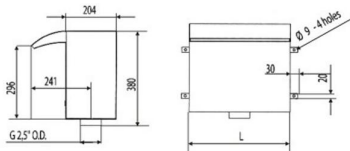


朗多瀑布
Model No:M05

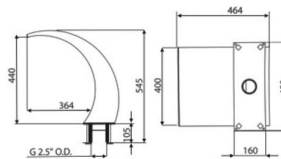


弧钩强力喷帘
600x300mm
Model No:M06



肩部冲击杆
Model No:M07



吸污盘
700x400mm
Model No:M08

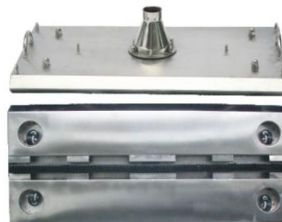

吸污盘
1000x450mm
Model No:M09



吸污车
Model No:M10

万千细微的有氧水气泡从躺椅垫背上汹涌而出，包裹人体，在皮肤的表面形成水膜，细腻地轻抚人体的肌肤及走穴，一方面可恢复皮肤的张力及弹性、补充水份；另一方面可舒缓紧张的情绪，消除失眠等症状。



太空水疗躺床 2100 X870mm
Model No:M11



太空水疗床 1996 X880mm
Model No:M12



太空按摩椅 850X750mm
Model No:M13



按摩坐床
850x600mm
Model No:M14



水疗坐床
900x600mm
Model No:M15



水疗拍打床
1900 x 720mm
Model No:M16



带扶手水床
1850 x 690mm
Model No:M17



按摩座椅
1100 x 650 x 450mm
Model No:M18



汽泡水床
1850 x 690mm
Model No:M19



按摩水床
1850 x 690mm
Model No:M20



镀金鸭嘴冲击浴
Model No:M21



镀金枪林弹雨冲击浴
Model No:M22



万向强力冲击浴
Model No:M23



万向掺汽冲击浴
Model No:M24



鹅颈冲击浴
Model No:M25



瀑布鸭嘴冲击浴
Model No:M26



扇形冲击浴
Model No:M27



万向尾凤冲击浴
Model No:M28



鸭嘴冲击浴
Model No:M29



枪林弹雨冲击浴
Model No:M30



背部按摩浴
Model No:M31



水幕拍打器
Model No:M32



万向镀铬鸭嘴
100mm
Model No:M33



万向镀铬鸭嘴
150mm
Model No:M34



万向凤尾喷头
Model No:M35



万向玉柱喷头
Model No:M36



万向环形喷头
Model No:M37



扁四孔喷头
Model No:M38



扇形喷头
Model No:M39



万向水握喷头
Model No:M40



万向掺汽喷头
Model No:M41



普通水握喷头
Model No:M42



枪林弹雨喷头
Model No:M43



鸭嘴喷头
Model No:M44



圆形五孔喷头
Model No:M45



圆形三孔喷头
Model No:M46



单孔气泡嘴 针刺喷嘴
Model No:M47




不锈钢溢水口
Model No:M48



不锈钢主排水
Model No:M49



不锈钢回水口
Model No:M50



锈钢吸污口
Model No:M51



收紧器
Model No:M52



泳线钩
Model No:M53



球形枪林弹雨
冲击浴
Model No:M54



球形万向凤尾
冲击浴
Model No:M55



球形万向水捶
冲击浴
Model No:M56



球形万向鸭嘴
冲击浴
Model No:M57



新形枪林弹雨
冲击浴
Model No:M58



新形万向鸭嘴
冲击浴
Model No:M59



针刺浴
Model No:M60



双龙冲击浴
Model No:M61



不锈钢气泡座椅
Size: 600x500mm
Model No:M62



气泡喷板
Size: Ø300mm
Model No:M63



大顶喷
Size: Ø300~450mm
Model No:M64



涌泉器
Size: Ø300mm
Model No:M65



气泡喷板
Size: 350x350mm
Model No:M66



足底按摩器
Size: 350x350mm
Model No:M67



浮浴喷板
Size: 350x350mm
Model No:M68



水火灌喷头
Size: 250x180mm
Model No:M69



不锈钢吸污盘
Size: 400x25mm
Model No:M70



不锈钢臀部按摩器
Size: 400x25mm
Model No:M71



足底按摩器
Model No:M72



周身浴
900x1500mm
(可做组合式)
Model No:M73



排骨针刺浴
Model No:M74



浮浴支架
Model No:M75



九孔气泡装置
Model No:M76



桑拿浴自动洒水装置
210x85 / 320x135
Model No:M77



维其浴
Size: 2600x1600x200mm
(可订做尺寸)
Model No:M78



维其浴I型
Size: 980x220mm
(可订做尺寸)
Model No:M79



维其浴II型
Size: 2000x200mm
(可订做尺寸)
Model No:M80




水疗系列 SPA Series



VT135
定做不锈钢毛发器
DN50, DN80, DN100, DN150



VT136
不锈钢气泡床
1700X600mm



VT138
不锈钢平衡水箱



VTSPA-05



VTSPA-11



VTSPA-11



卡通冲击浴 Cartoon Impact Bath



P-08 “企鹅” 冲击浴
H=1330mm



P-03 “鲤鱼” 冲击浴
H=1340mm



P-02 “金龙” 冲击浴
H=1450mm



P-10小丑



P-06 “海狮” 冲击浴
H=1400mm



P-07 “小象” 冲击浴
H=1320mm



P-05 “海马” 冲击浴
H=1400mm



P-09海螺



VT301
水蘑菇

Ø1500X2000mm
Ø1250X2000mm
Ø1000X2000mm



VT302
不锈钢水蘑菇

Size:
600,
800,
1000,
1200mm

Heater Exchanger



瑞典PAHLEN “三T” 高效节能交换器



Item No.	A	B	C	D	E	F		
11392	139	112	11/2"	407	72	4/3"	HF28	28KW(MF80)
11365	139	130	1"	355	92	11/2"	MF135	40KW
11366	139	130	1"	485	92	11/2"	MF200	60KW
11367	139	130	1"	613	92	11/2"	MF260	75KW
11368	139	130	1"	1070	83	2"	MF400	120KW

Water Heater



5.5-15KW数显恒温炉



18-60KW数显恒温器



18-60KW恒温炉



18-60KW

5.5-18KW

型号 Item No.	功率 Power (KW)	进/出水管径 Inlet/Outlet (inch)	电压 Voltage (V)
H-55	5.5	1.5	220/380
H-75	7.5	1.5	220/380
H-110	11	1.5	220/380
H-150	15	1.5	220/380
H-180	18	1.5	380
H-240	24	2	380
H-320	32	2	380
H-360	36	2	380
H-450	45	2	380
H-600	60	2	380



MD20



MD50

泳池热泵参数表 Swimming Pool Heat Pump Technical Characteristics

型号 Model No	MD20D	MD30D	MD50D	MD100D	MD150D	MD200D
功率Rated input power (KW)	1.84	2.98	4.6	9.2	11	19
制热量Delivered (KW)	7	14	21	42	50	84
电压Rated voltage (V)	220	220/380	380	380	380	380
频率Rated frequency (HZ)	50					
电流Rated Current (A)	8	13/6	9	18	25	35
最高出水温度Maximum outlet water temperature (°C)	35/45					
水流量Water flow (L/H)	2,000	3,600	5,500	11,000	15,000	22000
接管尺寸Circulating water pipes (mm)	50	50	50	63	63	75
外型尺寸Dimensions (mm)	1050x350x620	1120x490x710	1120x490x1260	1440x760x1060	1440x760x1060	1990x980x2080
重量Weight (KG)	75	95	150	300	330	600
防护等级Level of security	IPX4					

制冷机 REFRIGERATOR



箱式制冷机



制冷机



板式热交换器

型号 Item No.	制冷量 (W)	匹数 HP	额定电压 Voltage (V)	功率 Power (KW)	长 Length (mm)	宽 Width (mm)	高 Height (mm)	进出水口 (mm)
ZR-3307	2	2	220	1.5	930	650	960	40
ZR-3307	3	3	380	2.2	930	650	960	40
ZR-3307	5	5	380	3.8	1250	650	1080	40
ZR-3307	8	8	380	6.0	1450	800	1600	50

602#

最大压力: 8 bar
流量: 8 l/h
工作形式: 电子式
电压: 220V



903#

最大压力: 5 bar
流量: 45 l/h
工作形式: 电子式
电压: 220V

C-6125P

最大压力: 2.1 bar
流量: 30 l/h
工作形式: 机械式
电压: 220V



C-600P

最大压力: 4 bar
流量: 13 l/h
工作形式: 机械式
电压: 220V

意大利“西科”高科技电子计量泵

美国BLUE WHITE“兰白”投药泵



CL-100 自动投药器
Automatic coagulant
dosage gun



美国PENTAIR滨特尔(彩虹)
自动投药器300#
USA PENTAIR
automatic coagulant aun



“喜活”投药器
HAYWARD coagulant aun



50Kg消毒片



4.5Kg氯气丸



沉淀剂



硫酸铜除藻剂



活性炭



沉淀剂



Rayken“瑞凯”盐加氯器



英国ATG中压紫外线SX系列



英国ATG中压紫外线ECL系列



(10/14/21/28/39w)



(320-2400w)



10-120g



3-5g



10-120g

	杀灭对象 name	秒(S)*
细菌类 Bacteria	炭疽杆菌 Bacillus Anthracis	0.3
	破伤风杆菌 Clostridium Tetani	0.3
	痢疾杆菌 Dysentery bacilli	1.5
	大肠杆菌 Escherichia Coli	0.4
	葡萄球菌属 Staphylococcus Albus	1.3
病毒 Virus	结核杆菌 Micrococcus Candidus	0.4
	噬菌胞病毒 Bacteriophage	0.2
	流感病毒 Influenza	0.3
	脊髓灰质炎病毒 Poliovirus 1	0.8
	乙肝病毒 Hepatitis B Virus	0.8
霉菌孢子 Mould Spores	黑曲霉 Aspergillus Niger	0.3-0.7
	毛霉菌属 Mucor Mucedo	4.6
	青霉菌属 Penicillium Roqueforti	0.9-3.0
水藻类 Algae	蓝绿藻 Blue-Green Algae	10-40
	线虫卵 Nematode Eggs	3.4
	绿藻 Green Algae	1.2
鱼病类 Fish Disease	原生动物类 Protozoa	4.0-6.7
	白斑病 Leukoderma	2.7
	感染性胰坏死病 Infective Gangrene of Pancreas	4.0
	病毒性出血病 Virulent Bleeding Disease	

Main application:

Ozone generator is mainly used in medicine, water, pure water, mineral water, secondary water supply, swimming pool, aquaculture water, food and beverage industries such as water disinfection essence processing, and chemical industry, papermaking industry such as degreasing, bleaching, bleaching, for life, industry, hospital sewage treatment (sterilization, remove BOD, COD, etc.), as well as the life sewage, industrial cooling water reuse treatment, etc.

主要用途:

臭氧发生器主要用于医药水、纯净水、矿泉水、二次供水、游泳池水、养殖水体、食品饮料等行业用水消毒精华处理，还有化工行业、造纸行业等脱脂、脱色、漂白，用于生活、工业、医院污水排放达标处理（杀菌消毒、去除BOD、COD等），以及生活污水、工业冷却水回用处理等。

型号 Model	产品名称 Product	尺寸 (长*宽*高) Size(L*W*H)CM	产量 Ozone Output	电源 Voltage	重量 (KG) Weight	功率 Power
HY-013	臭氧发生器 OZONE	80*55*130	80g/h	220V 50Hz	40	1000
			100g/h		60	1300
			120g/h		65	1500
HY-004	臭氧发生器 OZONE	32*25*82	5g/h		11	160
			10g/h		13	180
HY-003	臭氧发生器 OZONE	40*30*93	20g/h		25	380
			40g/h		30	400
使用气源		使用气源 (氧气发生器或瓶装氧气) 气源或使用洁净干燥空气源				
使用气源		氧气源: 80-100mg/L,空气源: 15-20mg/L				

CCOREL 250 Series Pool Controller 250系列泳池水质监控仪





SIMPLE TO OPERATE

The CCOREL 250 ORP/PH Digital Controller automatically maintains both sanitizer ORP (oxidation-reduction potential or redox) and water pH in pools and spas. All operating functions are clearly labeled and accessible from the front panel, with safety and easy -reset features not found on other controllers. The default PH control level is 7.0. Below 6.9, the water is too acidic and causes corrosion and eye irritation. Above 7.5, it is too alkaline and causes irritation plus water cloudiness, scaling, stains and reduced sanitizer efficiency. The default ORP control level is 650mV, values for prevention of germs and bacteria.



ORP/PH 数显监控仪自动维护泳池和温泉上的消毒剂ORP和水质PH。所有运转功能都很清晰的显示在控制面板上，同时这个操作又安全又容易重新设置，在其它监控仪里是找不到这些功能的。默认PH值是7.5，如低于7.4，水质酸性太高会导致腐蚀和刺激伤害眼睛。如高于7.6，水质碱性太高会导致刺激伤害眼睛，同时出现水云量，水结垢，水渍，减低消毒效果。

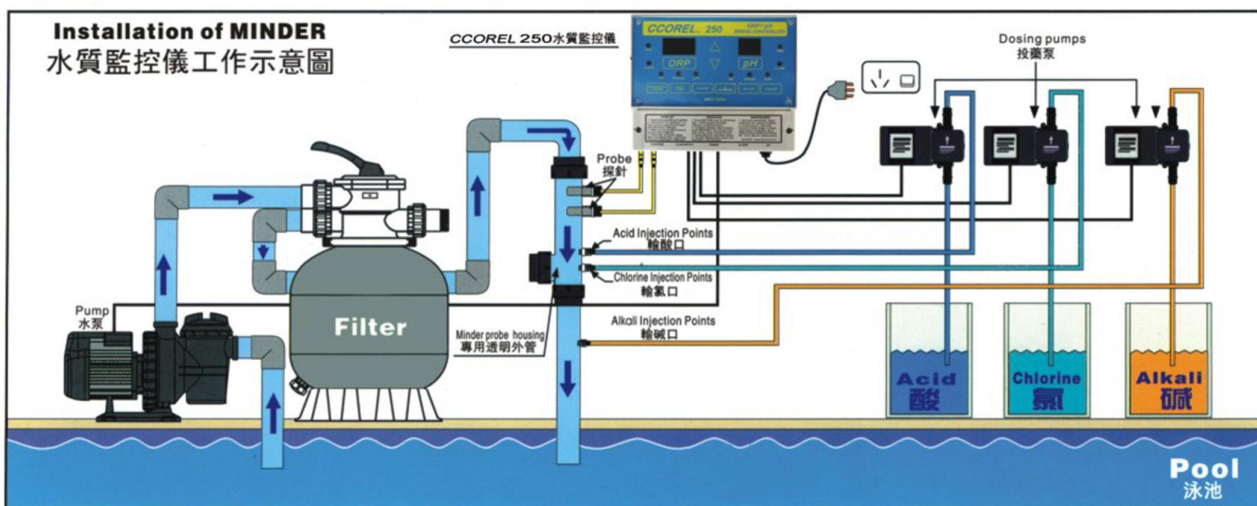

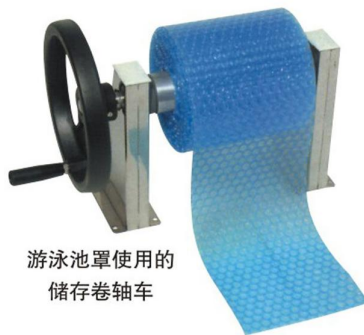

游泳池罩使用的
储存卷轴车

MF601 不锈钢结构, 包括铝管
MF602 储存卷轴车用铝管。长度=5m



MF603
In-ground pool cover reel w/
SS frame for $\Phi 3-1/4"$ tubes
豪华型泳池盖膜卷轴车



MF604
Above ground pool cover reel w/
ABS frame for $\Phi 3-1/4"$ & $1-1/2"$ tubes
标准型泳池盖膜卷轴车

膠膜讓您的游泳池5年不漏水

Liner make your swimming pool fire year water tight



1.0mm mosaic pool liner:
1.2mm blue pool liner:
1.5mm mosaic pool liner:
1.5mm clouds blue pool liner:
2.0mm mosaic pool liner:
Blue pool liner 1.2mm. width is 2M, length is not fixed;
Mosaic, the clouds colourful: width is 1.83M, length is not fixed




Non-slip vinyl liner



Non-slip vinyl liner

1.0馬賽克膠膜:
1.2藍色膠膜:
1.5馬賽克膠膜:
1.5雲彩藍膠膜:
2.0馬賽克膠膜:
藍色膠膜1.2:寬是2M,長度不固定;
馬賽克,雲彩:寬是1.83M 長度不固定

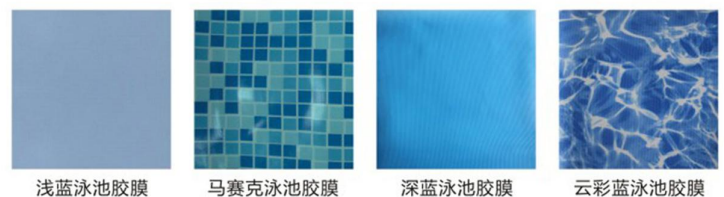

浅蓝泳池胶膜

马赛克泳池胶膜

深蓝泳池胶膜

云彩蓝泳池胶膜




集流直上喷头ZJB



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
ZJB 65	2 1/2"	300	15
		180	9
		250	12
ZJB 50	2"	150	8
		200	9
ZJB 40	1 1/2"	120	5

双开屏喷头SKzT

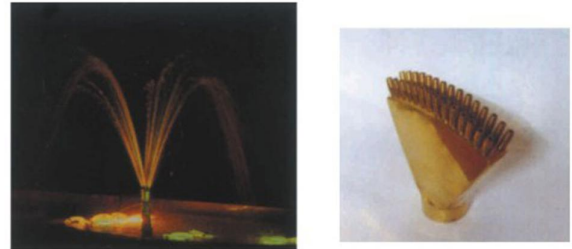

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SKZT40	1 1/2"	50-120	3.5
SKZT25	1"	50-100	2.5

旋转花喷头 SE




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SE 15	1/2"	40	2.0
SE 15	1/2"	40	3.0
SE 25	1"	70	3.0

万向直射喷头



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
ZA 25	1"	60-200	3.2-7.0
ZA 40	1 1/2"	70-250	3.5-8.0
ZA 50	2"	80-300	4.0-9.0

风火轮喷头 SD

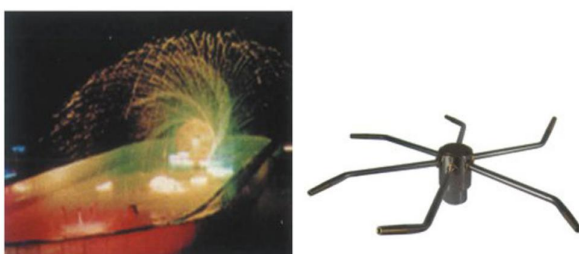

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SD 15	1/2"	30	2.0
SD 25	1"	40	3.0

冰塔(雪松)喷头 CBtB



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
CBtB80	3"	100-350	1-6
CBtB50	2"	100-250	1-4
CBtB40	1 1/2"	100-200	1-3.5
CBtB25	1"	70-150	1-3.0
CBtB20	3/4"	50-100	1-2.5
CBtB15	1/2"	50-100	0.8-1.5

掺气喷头 CCqB



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
CYqB50	2"	50-250	5-15
CYqB40	1 1/2"	50-200	4-10
CYqB25	1"	50-200	2-5
CYqB20	3/4"	50-150	1-4

可调空气吸引喷头 CE




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
CE 20	3/4"	40-80	0.4-0.8
CE 25	1"	50-100	1.0-3.0
CE 40	1 1/2"	80-200	2.0-6.0
CE 65	2 1/2"	80-300	2.0-13.0

玉柱喷头 CYzB



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
CYzB40	1 1/2"	200-300	2-4
CYzB25	1"	150-250	1.5-3.0
CYzB20	3/4"	80-100	1-2.5
CYzB15	1/2"	60-100	0.5-2.0

扇形喷头 ME

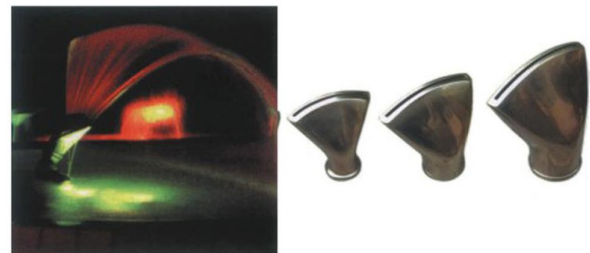


型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
ME 20	3/4"	30-50	0.2-0.6
ME 25	1"	30-80	0.3-0.8
ME 40	1 1/2"	30-80	0.5-1.0
ME 50	2"	30-80	0.6-1.3

涌泉（鼓泡）喷头 CH



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
CH 15	1/2"	50-100	0.15-0.3
CH 20	3/4"	50-100	0.2-0.35
CH 25	1"	50-100	0.3-0.5
CH 40	1 1/2"	50-100	0.4-0.8
CH 50	2"	60-150	0.5-0.8
CH 65	2 1/2"	100-200	0.5-1.0
CH 80	3"	150-300	1.0-1.5

水晶球(蒲公英)喷头 QJbB

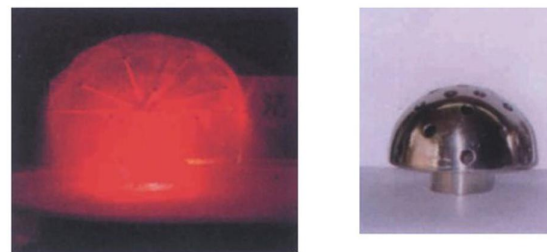


型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
QJbB 100	4"	80-100	1.3
QJbB 80	3"	80-100	1.0
QJbB 65	2 1/2"	80-100	0.8
QJbB 50	2"	80-100	0.7
QJbB 40	1 1/2"	60-100	0.5
QJbB 40	1 1/2"	60-100	0.5

蘑菇喷头 MA




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
MA 15A	1/2"	3.0-5.0	0.2-0.3
MA 15B	1/2"	3.0-5.0	0.2-0.3
MA 15C	1/2"	3.0-5.0	0.2-0.3
MA 15D	1/2"	3.0-5.0	0.2-0.3
MA 20	3/4"	4.0-6.0	0.2-0.3

喇叭花喷头 MD

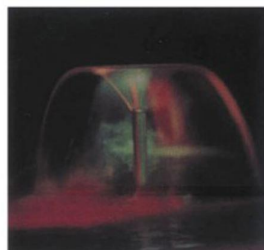

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
MD 15	1/2"	3.0-5.0	0.3-0.4
MD 20	3/4"	3.0-8.0	0.3-0.4
MD 25	1"	5.0-10.0	0.3-0.4
MD 40	1 1/2"	5.0-10.0	0.5-0.6

凤尾花喷头 FW



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
FW 20	3/4"	40-120	1.5-3.0
FW 25	1"	50-150	2.0-4.0

花柱礼花喷头 SF




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SF 25	1"	40	1.3
SF 40	1 1/2"	60	1.5

旋转喷头 SXNT




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SXNT 50	2"	150	6
SXNT 40	1 1/2"	100	4
SXNT 25	1"	75	3
SXNT 20	3/4"	40	3
SXNT 15	1/2"	40	2

蘑菇喷头 XXG

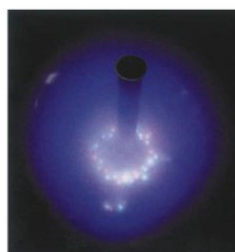

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
XXG 15	1/2"	3.0-5.0	0.2-0.3
XXG 20	3/4"	3.0-8.0	0.2-0.3
XXG 25	1"	5.0-10.0	0.2-0.3
XXG 40	1 1/2"	5.0-10.0	0.4-0.5
XXG 50	2"	5.0-15.0	0.5-0.6

水晶球(蒲公英)喷头 SJQ

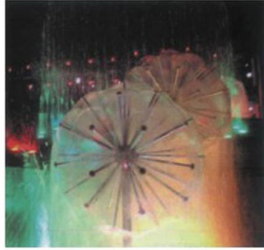

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SJQ40	1 1/2"	50-150	2-4
SJQ25	1"	50-80	2-3
SJQ20	3/4"	50-70	1-2

银缨喷头YY




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
YYB 40	1 1/2"	50-100	0.5-1.5
YYB 25	1"	50-100	0.4-1.2

可调三层花喷头SCH



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
SCHT50	2"	50	2.8
SCHT40	1 1/2"	50	2.5
SCHT25	1"	50	2.3

玉蕊喇叭花喷头YLB

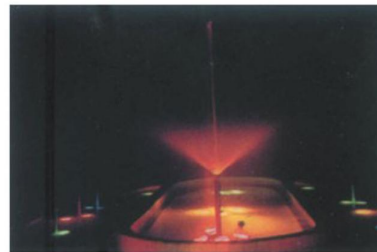

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
YLB 40	1 1/2"	50-100	1-2.5
YLB 425	1"	50-100	0.8-2
YLB 420	3/4"	50-80	0.6-1.5

叠银菇喷头



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
FDGB40	1 1/2"	50-150	0.3-0.7
FDGB25	1"	50-150	0.2-0.5

玉缨银菇喷头



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
FYGB 40	1 1/2"	50-150	0.5-1.5
FYGB 25	1"	50-150	0.4-1.2
FYGB 20	3/4"	50-100	0.4-0.8
FYGB 15	1/2"	50-80	0.3-0.6

叠银纓穗喷头




型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
FDYYB40	1 1/2"	50-150	1.3-3.6

玉蕊叠银纓穗喷头



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
FRDYB40	1 1/2"	50-150	1.3-4

银蕊玉纓穗喷头

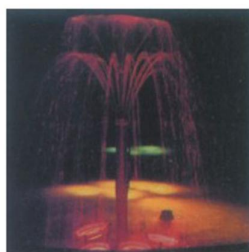

型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
FGDYB40	1 1/2"	50-150	0.8-1.5

万向可调喷射喷头



型号 Model	联接尺寸 Joint size (G)	工作压力 Pressure (Kpa)	喷射高度 Height (m)
ZB M10	M10	50-150	1.0-3.0
ZB M12	M12	50-150	1.0-3.5
ZB M15	1/2"	50-150	1.0-4.0
ZB M20	3/4"	50-150	1.0-5.0
ZB M25	1"	50-150	3.0-6.0
ZC M6	M6	40-100	0.4-1.2
ZC M8	M8	40-100	0.5-1.5
ZC M10	M10	50-150	0.5-1.5
ZC M12	M12	50-150	0.5-1.5
ZC M14	M14	50-160	0.5-1.5
ZC M16	M16	50-180	0.8-2.0
ZC M18	M18	50-180	0.8-3.0
ZC M20	M20	50-200	1.0-4.0



型号 Model	FA-02	FA-02M	FA-03	FA-03M	FA-04	FA-04M
灯珠 Lamp beads	1x5W	3x3W(1R 1G 1G)	1x5W	3x3W(1R 1G 1G)	1x5W	3x3W(1R 1G 1G)
功率 Power(W)	5	9	5	9	5	9
重量 Weight(kg)	2.25	2.25	5.62	5.62	9.27	9.27
电压 Voltage	AC12/24V	AC12/24V	AC12/24V	AC12/24V	AC12/24V	AC12/24V
喷距 Distance(m)	1.5-2.5	1.5-2.5	2-3	2-3	3-4	3-4

型号 Model	FA-02S	FA-02SM	FA-03S	FA-03SM	FA-04S	FA-04SM
灯珠 Lamp beads	1x5W	3x3W(1R 1G 1G)	1x5W	3x3W(1R 1G 1G)	1x5W	3x3W(1R 1G 1G)
功率 Power(W)	5	9	5	9	5	9
重量 Weight(kg)	4.32	4.32	10.8	10.8	17.28	17.28
电压 Voltage	AC12/24V	AC12/24V	AC12/24V	AC12/24V	AC12/24V	AC12/24V
喷距 Distance(m)	1.5-2.5	1.5-2.5	2-3	2-3	3-4	3-4



产品的尺寸可根据客户的需求定做

FS06-800/1000/1200/1500

音控模式(外置控制器)

Buit-out control Music pattern

电压 Voltage: AC220/110V

频率 Frequency: 50/60HZ


功率 Power: 1100w

喷射高度 Height: 2-3m

覆盖直径 Damerer: 1m

外型尺寸 Curcle: $\Phi 80\text{cm}$

重量 Weight: 38kg

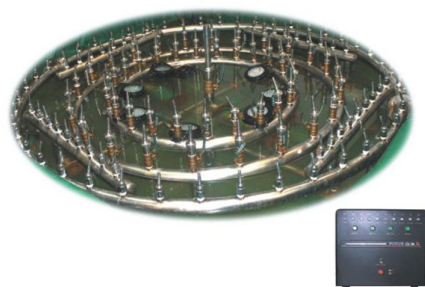

产品的尺寸可根据客户的需求定做

FS07-2000/2500/3000

音控模式(外置控制器)

Buit-out control Music pattern

控制水泵功能 Control pump function

单组变换功能 Single conversion function

程控模式功能 Programmable mode function

音乐控制模式 Music control mode

DVD播放功能 DVD playback

音频输出功能 Audio output capability

DVD遥控器控制 DVD remote control



不锈钢喷泉泵

喷泉泵

FS08-2000x4000

音控模式(外置控制器)

Buit-out control Music pattern

电压 Voltage: AC220/110V

频率 Frequency: 50/60HZ

功率 Power: 1.5w x 2


喷射高度 Height: 1-2m

覆盖直径 Damerer: 3x5m

外型尺寸 Curcle: 2000x4000mm

重量 Weight: 160kg





小鹅



大象滑梯



汽艇






1200 × 1200 × 2100mm



光波房
900 × 900 × 1900mm



1800 × 1200 × 1900mm

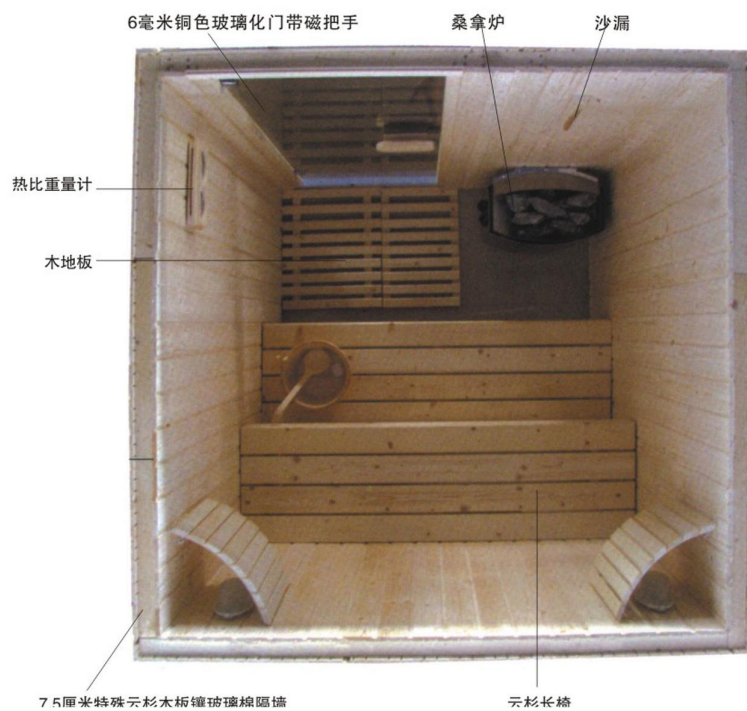

钢化玻璃



桑拿内饰




200x150x210cm



120 x 120 x 210cm



120 x 120 x 210cm

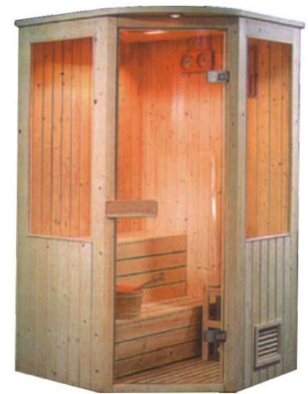

130 x 130 x 210cm



150 x 150 x 210cm



200 x 200 x 210cm



200 x 180 x 210cm



S-1212



S-1512



S-1515A



S-1515B




S-2015A




S-2015B




S-2020A




S-2020B



S-2020C




S-2020D




S-2025A




S-2025B




S-2520A




S-2530A




S-2530B



S-3025A




S-3025B



S-2520B



SAV10.5-18KW 干蒸炉

安装尺寸 Installation dimension		技术参数 Technical parameters																																							
 A、B和C的最小值见表1 <table><tr><th>型号 MODEL</th><th>功率 Power [KW]</th><th>桑拿房 Sauna room</th><th>到炉子最小距离(cm) Min.Distance to heater</th></tr><tr><th></th><th></th><th>最小容积 Min.Capacity</th><th>最大容积 Max.Capacity</th></tr><tr><td>SAV-105</td><td>10.5</td><td>9</td><td>15</td></tr><tr><td>SAV-120</td><td>12.0</td><td>10</td><td>18</td></tr><tr><td>SAV-150</td><td>15.0</td><td>14</td><td>24</td></tr><tr><td>SAV-180</td><td>18.0</td><td>15</td><td>27</td></tr></table>		型号 MODEL	功率 Power [KW]	桑拿房 Sauna room	到炉子最小距离(cm) Min.Distance to heater			最小容积 Min.Capacity	最大容积 Max.Capacity	SAV-105	10.5	9	15	SAV-120	12.0	10	18	SAV-150	15.0	14	24	SAV-180	18.0	15	27	<table><tr><th>型号 Model</th><th>功率 Power</th><th>适用空间 Applicable space (M²)</th></tr><tr><td>SAV-105</td><td>10.5KW</td><td>9-15</td></tr><tr><td>SAV-120</td><td>12.0KW</td><td>10-18</td></tr><tr><td>SAV-150</td><td>15.0KW</td><td>14-24</td></tr><tr><td>SAV-180</td><td>18.0KW</td><td>15-27</td></tr></table>	型号 Model	功率 Power	适用空间 Applicable space (M ²)	SAV-105	10.5KW	9-15	SAV-120	12.0KW	10-18	SAV-150	15.0KW	14-24	SAV-180	18.0KW	15-27
型号 MODEL	功率 Power [KW]	桑拿房 Sauna room	到炉子最小距离(cm) Min.Distance to heater																																						
		最小容积 Min.Capacity	最大容积 Max.Capacity																																						
SAV-105	10.5	9	15																																						
SAV-120	12.0	10	18																																						
SAV-150	15.0	14	24																																						
SAV-180	18.0	15	27																																						
型号 Model	功率 Power	适用空间 Applicable space (M ²)																																							
SAV-105	10.5KW	9-15																																							
SAV-120	12.0KW	10-18																																							
SAV-150	15.0KW	14-24																																							
SAV-180	18.0KW	15-27																																							



SAV18-27KW 干蒸炉

安装尺寸 Installation dimension		技术参数 Technical parameters	



SAV24-36KW 干蒸炉

安装尺寸 Installation dimension		技术参数 Technical parameters	



SCA 内控式桑拿炉 (不锈钢型)



SCA 外控式桑拿炉



WYQ 不锈钢内控干蒸炉



ZL 不锈钢椭圆形内控干蒸炉



火浴炉

瑞典“帝梦”桑拿炉

TYLO®



TYLO
SE内控炉
SE2/SE45
2.2KW/4.5KW
310*170*400



TYLO
SE内控炉
SE6/SE8
6.6KW/8KW
455*315*435



TYLO
SK外控炉
SK6/SK8
6.6KW/8KW
455*315*435



TYLO



TS30

SD外控炉
SDK10/SD16/SD20
10.7KW/16KW/20KW
650*395*570



CC50



TYLO 接驳器
RB60 305x350x125MM
RB30 305x310x75



新款外控器
New model sauna
heater controller



WYQ大炉



旋钮外控器



数显外控器



接驳器
大: 18-36KW
中: 9-18KW
小: 3-9KW



ZL-T



ZL-M



桑拿炉普通控制器



桑拿爐數顯控制器



接驳器



ZL 干蒸控制器



ZL 干蒸控制器 接驳器

芬兰“哈丽雅”桑拿炉 Finland"HARVIA"Sauna Heater



A30 3KW
迷你小爐
尺寸:340x165x450mm



Vega Lux
4.5KW/6KW/8kw/9kw
尺寸:480x330x540mm



Hidden Heater
隱藏式桑拿爐
6kw-12kw
尺寸: 1175x290x830mm



HARVIA Vega 小型桑拿爐
VEGA COMPACT 3KW/3.5KW
尺寸: 380(370)x310x540 mm



HARVIA Fuga 川流式桑拿爐
Fuga 6KW、9KW/380V
尺寸: 480X235X900 mm



HARVIA Vega 桑拿爐
Vega 4.5KW-9.0KW
4.5KW/6KW/8KW/9KW
尺寸:480(450)x310x540 mm



HARVIA 再生浴爐
6KW/9KW
尺寸: 450X385X560 mm



HARVIA Vega Pro 桑拿爐
Vega Pro 10.5KW-16.5KW
10.5KW/13.5KW/16.5KW
尺寸: 470X435X640 mm

芬兰“西活”桑拿炉 Finland"SAWO"Sauna Heater



SAWO 西活 SAV 大型落地式商業爐

10.5KW/12KW/380V
尺寸: 442X410X650 mm
15KW/18KW/380V
尺寸: 587X410X650 mm
21KW/24KW/380V
尺寸: 741X410X650 mm



SAWO K-1外控器
K-1
3KW~9KW 260X230X85 mm



SAWO C-150外控器
C-150
3KW~15KW 305X240X95 mm



SAWO西活 SCA挂壁式商用爐
SCA 4.5KW~9.0KW/220V-380V
4.5KW~6.0KW/220V-380V
尺寸: (421)513X288X455 mm
8KW~9.0KW/220V-380V
尺寸: (421)513X288X514 mm



SAWO 西活MIN 迷你型爐
2.3KW~3.0KW~3.6KW/220V
尺寸: (340) 432X208X445 mm



木质温湿单表
Wooden temperature
moisture meter



木质温湿双表
Wooden temperature
and moisture meter



沙漏
Sand timer



沙漏
Sand timer



不锈钢温湿表
Stainless steel
temperature moisture meter



金边温湿表
Golden temperature
moisture meter



防爆灯
Non-explosive light



桑拿木质灯罩
Sauna wood lamp shade



桑拿木质灯罩
Sauna wood lamp shade




木钟
Wooden clock



木桶木勺
Wooden drum and spoon



桑拿石
Sauna stone



SF-1
塑料壳体低压电控阀



SF-2
黄铜壳体低压电磁阀



SA-1
桑拿房自动喷淋控制器



花洒杆



SP-1
不锈钢花洒头



SIR-1
喷水感应面板



SK-2
喷水总动开关



桑拿大拉手
Handle(big size)



木枕
Head rest



桑拿小拉手
Handle(small size)



桑拿拉手
Sauna Door Handle



百叶窗
Sauna room ventilation



出气口
Gas mouth



大拉手



豪华沙漏



桑拿板成品
Sauna board finished product



gyg-1



gyg-2



gyg-3



gyg-4



gyg-5



锁牌-1



锁牌-2



锁牌-3



锁牌-4



芬兰云杉
Tinland wood



阿巴奇
Abachi wood



铁杉
Hemlock wood



加拿大香柏
Canada wood



缅甸香柏
Cedar wood



白杨
China wood



黄桢
China wood



红杉
Red wine wood

品名	芬兰云杉		加拿大香柏		阿巴奇
墙身板	2100*95*12	2100*95*12.5	2135*95*12	2440*95*12	2100*95*12
椅 木	2100*95*18	2100*95*20	2135*95*18	2440*95*18	2100*95*18
地板木	2100*41*18		2135*41*18	2440*41*18	2100*41*18
品名	铁杉	白杨	缅甸香柏	黄桢	红杉
墙身板	2000*95*12	2100*95*11	2100*95*12	2100*95*12	2100*95*12
椅 木	2000*95*18	2100*95*20	2100*95*18	2100*95*18	2100*95*18
地板木	2000*41*18	2100*41*20	2100*41*18	2100*41*18	2100*41*18

以上產品可以根據客戶要求定做，同時可以訂做各種異型裝飾條。



欧式门
尺寸：1800×650
1800×600



豪华门
尺寸：1800×650



全璃门
尺寸：
1860×765
1860×675



桑拿门
尺寸：
1800×650
1800×600



格子门
尺寸：
1800×650
1800×600




订制桑拿门

桑拿炉丝




SCA-1000W



SCA-1500W



SCA-2000W



SCA-2670W




SCA-3000W




SAA-2000W




SAV-1500W



SAV-2000W



SAV-2500W




SAV-3000W




SAWO-2000W




SAWO-2700W




SAWO-3000W



SAWO/SA-1500W



SAWO/SA-2000W



TY-2000 帝梦炉丝



HA-2000 哈丽雅炉丝



外控电路板



数显外控器电路板



发热管



接线排



变压器



灯变压器



发热管



蒸汽喷头



进水电磁阀



排水电磁阀



安全阀



水位探针



4B前面全玻璃湿蒸房
1900×1300×2250mm



座椅 600×940mm



座椅 1200×1850mm



座椅 510×1850mm
座椅 600×1850mm
座椅 780×1850mm



2B全玻璃湿蒸房
1300×1200×2100mm



蒸气房折叠椅2
座椅 320×328mm



座椅 1130×1140mm



蒸气房折叠椅1
460×330×50mm



座椅 600×1000mm



座椅 1080×950mm



座椅 600×940mm



1B全玻璃湿蒸房
880×900×2100mm



湿蒸门 785×1860mm



湿蒸门 785×1860mm



HX 内控式桑拿炉 4.5-9KW



HX 10.5KW-16.5KW 大桑拿炉

安装尺寸 Installation dimension		技术参数 Technical parameters	
型号 Model	功率 Power	适用空间 Applicable space (M ²)	
HX-45BS	4.5KW	3-6	
HX-60BS	6.0KW	5-9	
HX-80BS	8.0KW	8-12	
HX-90BS	9.0KW	9-13	

安装尺寸 Installation dimension		技术参数 Technical parameters	
型号 Model	功率 Power	适用空间 Applicable space (M ²)	
HX-10.5	10.5KW	9-15	
HX-13.5	13.5KW	10-18	
HX-16.5	16.5KW	14-24	



SCA内控干蒸炉 3-9kw



SCA不锈钢外控干蒸炉 3-9kw

安装尺寸 Installation dimension		技术参数 Technical parameters	
型号 Model	功率 Power	适用空间 Applicable space (M ²)	
SCA-30NS	3.0KW	2-4	
SCA-45NS	4.5KW	3-6	
SCA-60NS	6.0KW	5-9	
SCA-80NS	8.0KW	8-12	
SCA-90NS	9.0KW	9-13	



JM内控炉



JM 外控炉

安装尺寸 Installation dimension		技术参数 Technical parameters	
型号 Model	功率 Power	适用空间 Applicable space (M ²)	
JM-30B	3.0KW	2-4	
JM-36B	3.6KW	3-4	

特点/Characteristics:
 体积小巧, 外形美观, 适用于豪华贵宾房及家庭桑拿房的配套。
 外壳为全不锈钢型。
 Being light and elegant, it is applicable for luxurious VIP room and households. There are full stainless steel casings available.

瑞典“TYLO帝梦”蒸汽机系列 Sweden “TYLO” Sweden Generator



VB 蒸汽机
2.2~4.5KW/220V
6.6KW/220V~380V



VA 蒸汽机
6KW/380V
9KW/380V
12KW/380V
18KW/380V
24KW/380V



香熏机



Steam generator model	Output kw	Lightweight wall of galass, plastic, Elysee/Excellent room etc.		Heavy wall of tiles concrete, stone etc.,		Steam production kg/h	Steam generator dimensions LxWxH
		with ventilation	without ventilation	with ventilation	without ventilation		
2/4 VB*	2.2		Max*2.5	Max*2.5	Max*1.5	3	
	4.5	Max*4	Max*5.5		Max*3.5	5.5	445x130x405
6VB	6.6	3.8	4-15	2-5	2.5-8	8	445x130x405
9VB	9	6-16	13-24	4-10	7-16	12	570x224x485
12VB	12	14-22	22-30	8-15	14-20	16	570x224x485
18VB	18	20-30	28-40	13-20	18-30	24	615x445x485
24VB	24	28-40	38-50	18-30	28-40	32	615x445x485

芬兰“哈维雅”蒸汽机 Finland"Harvia"Steam generator



型号	输出功率 (kW)	建议房间尺寸(m³)						蒸汽 输出量 公斤/小时	230V 1N~		400V 3N~	
		薄墙壁 (如塑料, 等……)		瓷砖薄墙		石瓦砖墙, 等……			电缆 mm²	保险丝 A	电缆 mm²	保险丝 A
		有通风设备	无通风设备	有通风设备	无通风设备	有通风设备	无通风设备					
HGS45	4.5	2.0-5.0	2.0-7.0	2.0-4.0	2.0-6.0	2.0-3.5	2.0-4.5	5.5	3 x 6	25	5 x 1.5	3 x 10
HGS60	5.7	2.5-8.0	3.5-11.0	2.0-6.0	3.0-9.0	2.0-5.0	2.0-7.5	7.6	3 x 6	25	5 x 1.5	3 x 10
HGS90	9.0	6.0-12.0	9.0-17.0	4.5-10.0	7.5-14.0	3.0-8.0	6.0-11.5	12	—	—	5 x 2.5	3 x 16
HGS11	10.8	10.0-14.5	15.0-21.0	8.0-12.0	12.0-17.0	6.0-10.0	10.0-14.0	14.6	—	—	5 x 2.5	3 x 16



哈丽雅3-4.5KW蒸汽机



哈丽雅4.5-9KW蒸汽机



哈丽雅9.5-15KW蒸汽机



哈利雅蒸汽机

型号 Mode	功率 Power(kw)	工作电压 Voltage(V)	额定电流 Current(A)	相数 Phase(N-)	蒸汽房容积 Volume(M ³)	配线 Wire(NXmm ²)	控制形式 Control Type
GT-30	3	220/380	13.6/4.5	1/3	2.5-4	3*4/5*1.5	外控 Control in side /out side
GT-45	4.5	220/380	20.4/6.8	1/3	3-5	3*6/5*2.5	
GT-60	6	220/380	27.1/9.1	1/3	4.5-7	3*6/5*2.5	
GT-80	8	220/380	36.3/12.1	1/3	6-9	3*10/5*4	
GT-90	9	220/380	41/13.7	1/3	8-11	3*10/5*4	
GT-105	10.5	220/380	47.7/15.9	1/3	9-13	3*10/5*4	
GT-120	12	220/380	54.5/18.2	1/3	11-14	3*10/5*4	
GT-135	13.5	220/380	61.3/20.4	1/3	13-18	3*10/5*6	
GT-150	15	380	65/24	1/3	14-20	3*16/5*10	



史密斯蒸汽机



卡罗蒸汽机



斯蒂芬蒸汽机

“哈丽雅”蒸汽机



兰色4-9KW“哈丽雅”蒸汽机



兰色10.5-18KW“哈丽雅”蒸汽机




外控器





香芬机

型号 Mode	功率 Power(kw)	工作电压 Voltage(V)	额定电流 Current(A)	相数 Phase(N-)	蒸汽房容积 Volume(M ³)
MC-45	4.5	220/380	20.4/6.8	1/3	3-5
MC-60	6	220/380	27.1/9.1	1/3	4.5-7
MC-80	8	220/380	36.3/12.1	1/3	6-9
MC-90	9	220/380	41/13.7	1/3	8-11
MC-105	10.5	220/380	47.7/15.9	1/3	9-13
MC-120	12	220/380	54.5/18.2	1/3	11-14
MC-150	15	220/380	68.1/22.6	1/3	13-18

STEAM ROOM (蒸汽房)

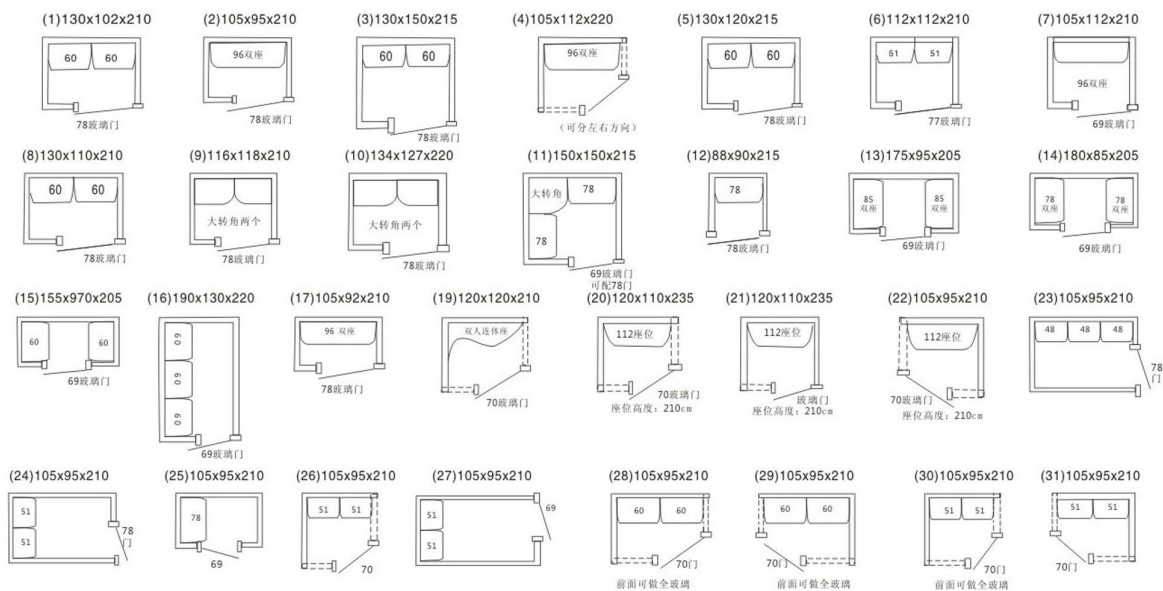

STEAM ROOM (蒸汽房)

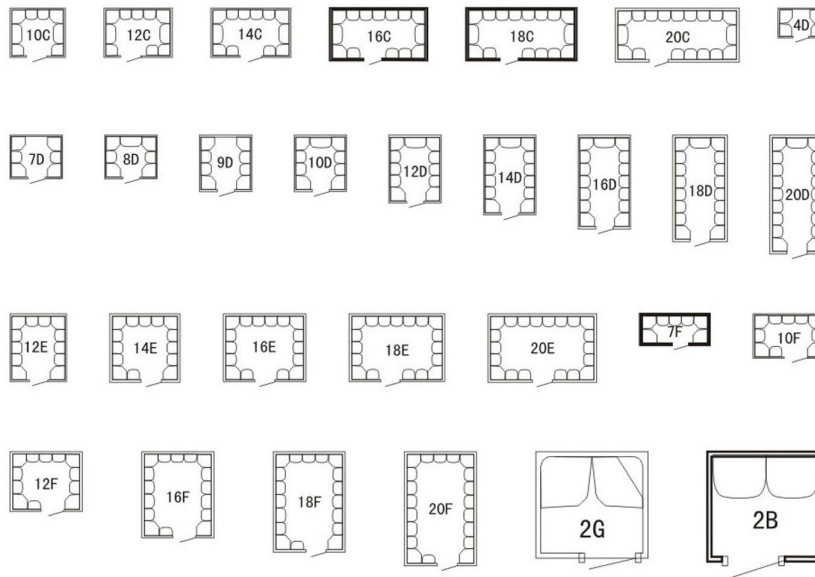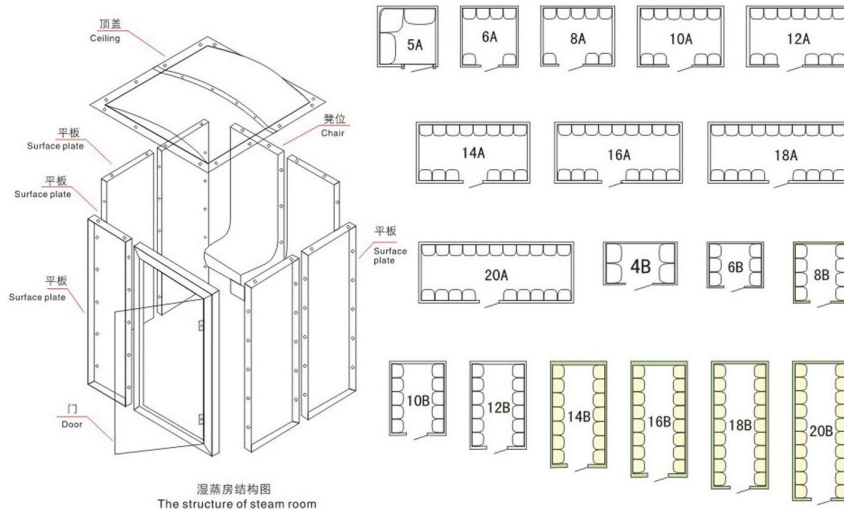

蒸汽系列		
型号	炉	尺寸 长 x 宽 x 高 (mm)
5A	6kw	1500x1500x2250/2300
6A	9kw	2500x1900x2250/2350
8A	10.5kw	3100x1900x2250/2350
10A	12kw	3700x1900x2250/2350
12A	18kw	4300x1900x2250/2350
14A	18kw	4900x1900x2250/2350
16A	18kw	5500x1900x2250/2350
18A	24kw	6100x1900x2250/2350
20A	24kw	6700x1900x2250/2350
1B	4.5kw	880x900x2100
2B1	4.5kw	1050x1120x2150
2B2	4.5kw	1300x1100x2150
2B3	4.5kw	1300x1200x2150/2300
4B	6kw	1900x1300x2250/2350
6B	9kw	1900x1900x2250/2350
8B	9kw	1900x2500x2250/2350
10B	10.5kw	1900x3100x2250/2350
12B	12kw	1900x3700x2250/2350
14B	15kw	1900x4300x2250/2350
16B	18kw	1900x4900x2250/2350
18B	18kw	1900x5500x2250/2350
20B	24kw	1900x6100x2250/2350
10C	9kw	2540x2120x2250/2350
12C	9kw	3140x2120x2250/2350
14C	12kw	3740x2120x2250/2350
16C	12kw	4340x2120x2250/2350
18C	18kw	4940x2120x2250/2350
20C	18kw	5540x2120x2250/2350
4D	4.5kw	2120x1340x2250/2350
6D	6kw	2120x1340x2250/2350
7D	6kw	2120x1940x2250/2350
8D	8kw	2120x1940x2250/2350
9D	9kw	2120x2540x2250/2350
10D	10.5kw	2120x2540x2250/2350
12D	10.5kw	2120x3140x2250/2350
14D	12kw	2120x3740x2250/2350
16D	15kw	2120x4340x2250/2350
18D	18kw	2120x4940x2250/2350
20D	18kw	2120x5540x2250/2350
12E	12kw	2540x3140x2250/2350
14E	15kw	3140x3140x2250/2350
16E	18kw	3740x3140x2250/2350
18E	24kw	4340x3140x2250/2350
20E	24kw	4940x3140x2250/2350
7F	9kw	3140x1340x2250/2350
10F	10.5kw	3140x1940x2250/2350
12F	12kw	3140x2540x2250/2350
14F	15kw	3140x3140x2250/2350
16F	18kw	3140x3740x2250/2350
18F	24kw	3140x4340x2250/2350
20F	24kw	3140x4940x2250/2350
2G	3-4kw	1180x1160x2200



TYS-001



TYS-002



TYS-003

TYS-007

TYS-0010B
450X450X460mm



MY-0010A
1900X640X800mm



TYS-006



TYS-006

TYS-004





ART 1040



ART G5227



ART G3050



ART G3051



ART 1111



ART 1113




ART 1112



ART 1114

ART 1244

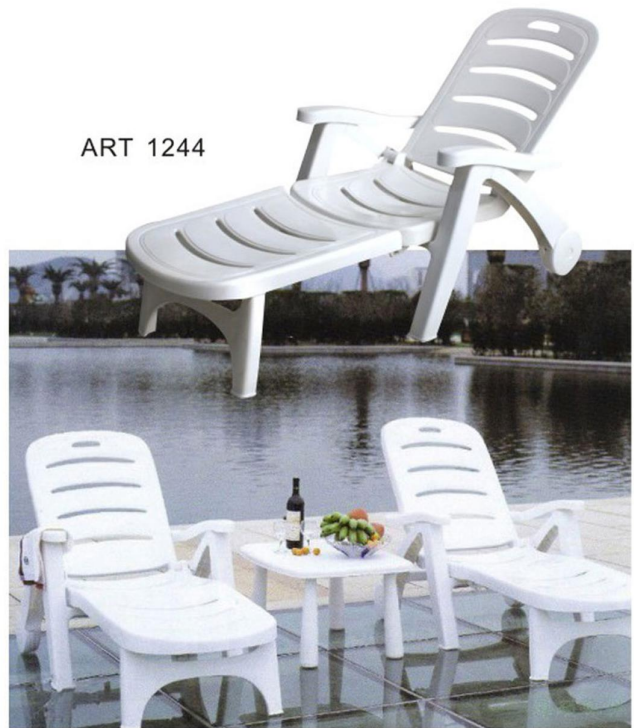

MY 0011



MY 0012