

Steel & Scaffolds

Al Naseeha

Building Materials Trdg. Co.L.L.C.

Website : www.alnaseeha.com

P.B. No.: 120447, Dubai - UAE,

Tel.: +971-4-2563690, Fax: +971-4-2582865

E-mail : sales@alnaseeha.ae, alnaseeha@eim.ae

Mob: +971 50 653 6760

SCAFFOLDING PROFESSIONALS

AL NASEEHA BLDG. MAT. TRD. CO. LL C

Al Naseeha Bldg Mat.Trdg.Co LLC is Dubai UAE based company dealing with the complete range of Scaffolding Access System, Scaffolding Accessories, Aluminum Scaffolding and Aluminum Ladders, Scaffolder Tools & Scaffolding safety products.

We have emerged into the ever-growing market of UAE with our quality product range. We are the distributor for TIGER BRAND Scaffolder Tools, Scaffolding Safety Products which has a high demand in UAE as well as GCC MARKET

Established in 2005, as service oriented and professionally managed company specialized in scaffolding entered in UAE market with a quality workforce with excellent product knowledge. Our products are manufactured in compliance with strict quality controls and standards. In accordance with our company policies and strictly regulated BS/EN STANDARDS. We never compromise on product quality and safety and have set the benchmark for quality in each and every product we offer.

We have a dedicated team of ENGINEERING, DESIGNING & BUSINESS PROFESSIONALS who have succeeded in achieving our mission to provide good uncompromising products at a reasonable cost.

Over these years we built up a strong clientele who rely on us for our SERVICE, SAFETY & QUALITY products.

CONTENTS

1	TUBE & COUPLERS	Page 3
2	SCAFFOLD BEAMS	Page 3
3	CUPLOCK SYSTEMS	Page 4
4	LAYHER-RINGLOCK SYSTEMS	Page 4
5	LIGHT WEIGHT H FRAMES	Page 4
6	ALUMINUM & STEEL MOBILE TOWERS	Page 5
7	ACCESSORIES	Page 5
8	FORMWORK ACCESSORIES	Page 6
9	SCAFFOLD BOARDS	Page 6
10	SCAFFOLD TOOLS & ANCILLARY	Page 7
11	SCAFFOLD CASTOR WHEELS	Page 8
12	LADDERS & ACCESSORIES / LOWER HIEGHT ACCESS	Page 8
13	SCAFFOLD MANUFACTURES ACCESSORIES	Page 9
14	PROPS & PUSH/PULL PROPS	Page 9
15	STAIRCASE SYSTEM	Page 9
16	LAYHER EVENT SYSTEMS	Page 10

1 TUBE & COUPLERS

Drop Forged Swivel Coupler

Applicable on tube size: 48mm Dia
Component Weight : 1050 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2"BSW
Size of nut : 20.5 mm
Hex Nut (Across Flat)
Surface Finish : Cold Zinc Plated
Application : used to connect two Scaffold tubes at any angle



Joint Pin Coupler (Sheet Metal)

Applicable on tube size: 48mm Dia
Component Weight : 900 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated (Golden Colour)



Putlog Coupler (With Forged Cap)

Applicable on tube size: 48mm Dia
Component Weight : 700 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2"BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated
Application: Used to connect two Scaffold tubes at 90°




Single Coupler Forged

Applicable on tube size: 48mm Dia
Component Weight : 550 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated
Application: Used to connect Diagonal Brace on the Scaffold Structure



Board Retaining Coupler (With Forged Cap)

Applicable on tube size: 48mm Dia
Component Weight : 600 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated
Application: Used to connect two Scaffold Boards with the Tubes



Pressed Sheet Metal Double Coupler

Applicable on tube size: 48mm Dia
Component Weight : 760 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated (Golden Colour)
Application: Used to connect two Scaffold tubes at 90°




Pressed Sheet Metal Swivel Coupler

Applicable on tube size: 48mm Dia
Component Weight : 860 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2"BSW
Surface Finish : Cold Zinc Plated
Application : used to connect two Scaffold tubes on beam



Pressed Sheet Metal Steeve Coupler

Applicable on tube size: 48mm Dia
Component Weight : 1150 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2"BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated (Golden Colour)
Application: Used to extend Scaffold Tubes internally



Swivel Girder Clamp

Applicable on tube size 48 mm Dia
Material of bolt : Mild Steel
Thread of bolt : 1/2" BSW
Surface Finish: Cold Zinc Plated



Drop Forged Double Coupler (Right Angle Coupler)

Applicable on tube size: 48mm Dia
Component Weight : 1025 grams
Material of bolt: Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm Hex Nut (Across Flat)
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated
Application: Used to connect two Scaffold tubes at 90°



Girder Clamp

Applicable on tube size 48 mm Dia
Material of bolt : Mild Steel
Thread of bolt : 1/2" BSW
Surface Finish: Cold Zinc Plated
Application: Used to connect two Scaffold tubes on beam



Scaffold Tube

Tube size: 48.30 mm Diameter, 6 meter in length and 3.25mm thickness
Component Weight : 21.4Kg for 6 meter length
Surface Finish: Self Finished (Black)/Hot Dip Galvanized
Application: Is used to erect the scaffolding structure and for fabricating Cuplock system scaffolding /Kwikstage system scaffolding



Coupler T Bolt


This is the component to repair the couplers



2 SCAFFOLD BEAMS

ALUMINIUM LATTICE BEAM


450mm deep Aluminium Beams are lightweight, high performance, high quality and can be used in all scaffold designs. Sizes 450mm deep beams in 3.1m, 4.1m, 5.1m, 6.1m and 8.1m lengths



ALUMINIUM-LATTICE-BEAM

LADDER BEAM

Designed to provide a clear span between scaffolds, Steel ladder beams are 305mm deep and 305mm from centre to centre rung, manufactured to any length on request. All Ladder Beams conforms to BS1139



STEEL LADDER BEAM

UNIT BEAM

Steel unit beam in 8'(2.44m) & 12'(3.66m) lengths gives clear spans where access is required. These beams can be connected using the inbuilt spigot and additional high tensile nuts and bolts. All Unit Beams conforms to BS1139.



STEEL UNIT-BEAM

3 CUPLOCK SYSTEMS


Transoms

LENGTH	MASS
2.44m	22.4kg
1.83m	13.7kg
1.27m	9.7kg
1.05m	7.9kg
0.61m	5.0kg



Plane Base Plate


SIZE	DIMENSIONS
3/4" x 100mm	150mm x 150mm x 6mm



Base/Universal Jack

SIZE	CROSSSECTION
760mm	Hollow

DIMENSIONS	
150mmx150mmx6mm	



Decking Beams


SIZE
centre to centre of standard
2.5m
1.8m
1.2m



Forkhead

TUBE SIZE	THICKNESS
120mm	3.25mm

H-DIMENSIONS	
100mmx150mmX100x100x150mm	



Infill Beams

SIZE
1.2m
0.9m



Cantilever Frame

HEIGHT - H	THICKNESS
1.5m	3.25mm
1.0m	3.25mm



Drophead

WEIGHT
5.4 KG



Beam Bracket

HEIGHT	THICKNESS
1.5m	3.25mm
1.0m	3.25mm



Socket Adaptor

SIZE	THICKNESS	DIMENSIONS
150mm	4mm	150mmx150mmx6mm



Hop-up Bracket

STANDARD SIZE




Standard

SIZE	THICKNESS	
	Light duty	Heavy duty
3.0m	3.25mm	4.0mm
2.5m	3.25mm	4.0mm
2.0m	3.25mm	4.0mm
1.5m	3.25mm	4.0mm
1.0m	3.25mm	4.0mm



Ledgers

SIZE	THICKNESS	
	(CENTER TO CENTER OF STANDARD)	
2.4m	3.25mm	4.0mm
1.8m	3.25mm	4.0mm
1.2m	3.25mm	4.0mm
0.7m	3.25mm	4.0mm



4 LAYHER-RING LOCK SYSTEMS




5 LIGHT WEIGHT H-FRAMES

LIGHT DUTY FRAMES

- * The system has built spigot and are light weight which allows faster assembly and dismissing
- * No skilled labour required
- * The frame has tubular brace for better rigidity

Different Light Duty Frames Available are:\

- Italian frame
- Single ladder frame
- Double ladder frame
- Beatty frame

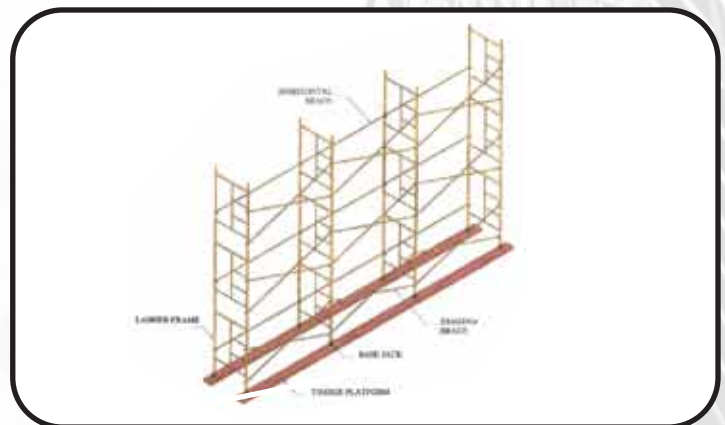

6 ALUMINUM & STEEL MOBILE TOWERS



For working at height in a safe, stable and comfortable manner, TIGER aluminium Mobile Towers single width and double width are available for short and long term rental & contract (supply , erection & Dismantling) We offer aluminum mobile towers from 1m to 15 m working heights. TIGER Aluminium scaffolding system provides a strong & safe tower that meets all applicable occupational health and safety standards. Aluminum Mobile Tower are ideal for builders, painters, contractors, interior companies, Advertising companies, maintenance companies, plumbers, electricians etc.

Note : Follow the instruction Manual to erect the tower .



7 ACCESSORIES

FORM WORK ACCESSORIES




Universal Clamp

Applicable on tube size:
48mm Dia
Material of bolt: Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated




Counter Plate with Wing Nut

Applicable on tie rod size: 17mm
Component Weight : 450 grams
Surface Finish: Self finished/Cold Electro zinc plated
Application: on tie rod



Timber Walling Clamp

Material : Mild Steel
Thread of bolt: 1/2" BSW
Size of nut: 20.5 mm
Hex Nut (Across Flat)
Surface Finish: Cold Zinc Plated



Rapid Clamp

Material : Casted iron
used in 8 mm and 10 m steel bars



H 20 Beams Wooden

Height: 200 mm
Used with Cup lock system and all other major system



Tie Rod Connector

Used for connect tie rod
Size : 50 mm and 100 mm

8 FORMWORK ACCESSORIES



Tie Rod 16 to 32mm

Component Weight: 8.9 Kg for 6 meter length
Surface Finish : Self Finished Size: 15/17mm dia
Load: 90KN breaking load
Available size : 0.5 Mtr. To Mtr.



Wing Nut (for Tie Rod) 16 to 32mm)

Applicable on tie rod size: 17mm Dia
Component Weight : 280 grams
Surface Finish: Self finished/Cold Electro zinc plated
Application: on tie rod



PVC TYPE STEEL CONE /D CONE

Made from Low Carbon Steel with PVC Cove.
The Safe Working Load is 90 KN. PVC Type Steel Cone manufacturer Threading is suitable for 15/17mm tie rod.
The available length of 100mm.



STEEL CONE

Made from Low Carbon Steel.
The Safe Working Load is 90 KN. Steel Cone Exporter Threading is suitable for 15/17mm tie rod.
The available lengths is 75mm and 100mm.




Water Stopper

Casted, with PVC cap suitable for Tie rod 16mm



Washer Plate

Applicable on tie rod size: 17mm Dia
Thickness available: 5, 6, 8, 10 mm thick
Surface Finish: Self finished/ Cold Electro zinc plated
Application: on tie rod



Shuttering Clamp



PVC Cone



Tie Rod Sleeve Pipe

9 SCAFFOLD BOARD



LVL BOARDS (Tiger)



SCAFFOLD BOARD (wooden)



SCAFFOLD ENDBAND



STEEL BOARD WITH HOOK



STEEL BOARD WITHOUT HOOK



FIRE RETARDANT SCAFFOLD BOARD

We are importing from, Austria, European, Union, China the Scaffold. Boards that strictly comply with the British Standard BS2482 : 2009 and OSHA standard

AVAILABLE SIZES:

- 38mm*225mm*3.9m
- 38mm*225mm*3.0m
- 38mm*225mm*2.5m
- 38mm*225mm*2m
- 38mm*225mm*1.5m
- 38mm*225mm*1m

10 SCAFFOLD TOOLS & ANCILLARY



Hammer



Gin Wheel 8" & 10"



Rope for Gin Wheel



Scaffolder's Spanner with lanyard Tiger (UK)



Scaffolding Ring Bolt



Ratchet Spanner



Pvc Coupler Cap



Measuring Tape & Hammer Pouch 02



Tool Wrist Lanyard



Scaffold Tool Belt DEK



Scaffolders Belt HD Tiger



Tool Bag - Tiger



Full Body Harness



Scaffold Spanner



Ladder Tag & Micro Tag



Inspection Tag -Safety Tag



Safety Rebar Cap - Mushroom & Drum type



Tube & Fittings End Cap



Tredda Plate - Base Plate Pad



4-Way Ratchet Spanner




Scaffolding Trap Door



Scaffolding Spirit Level with Magnate (Tiger) - 10"



Tool Lifting bag 30 & 50 kg



Scaffolding Spring Gate Auto

11 SCAFFOLD CASTER WHEELS



Caster Wheel Heavy Duty Dual Type - **Rexello**



Caster Wheel Heavy Duty Pipe Type



Caster Wheel Heavy Duty Rod Type



Aluminum Tower Wheel Adjustable



Castor Wheel for Aluminum Tower



Revvo scaffolding wheels UK

12 LADDERS & ACCESSORIES / LOWER HEIGHT ACCESS

Aluminum-Folding-Ladder-



Aluminum-Podium-Scaffolding



Aluminum Platform -Ladder



Timber Pole Ladder (Haydock-UK Origin)



Rolling-Warehouse-Aluminum-Ladder



Fiber Glass Ladder



Steel ladder



Two-Way-Aluminum-Ladder



Ladder Clamp




Ladder Clamp (Size: 48.3mm)
Safely and securely clamps a ladder to a scaffold tube.
Used in Pares ensure that a ladder cannot slip or lean.


13 SCAFFOLD MANUFACTURERS ACCESSORIES



Round washer for Round spigot
 Size : 38 mm dia pipe
 Finish : GI and MS
 Thickness : 2.5mm



Round washer for Square Spigot
 Size : 31 mm x 31 mm SHS
 Finish : GI and MS
 Thickness : 2.5 mm



Prop Sleeve
 Application: For Light/Heavy duty Props system component
 Weight: 1 kg to 2 kg
 Pipe thicknes : 3mm/4mm



Pressed Sheet Metal Bottom Cup
 Applicable on tube size : 48 mm Dia
 Component Weight : 200 grms
 Surface Finish: Self finished
 Application: Cuplock Scaffold system component welded at the vertical pipe to hoist horizontal (pipe) Ledger



Drop Forged Jack Nut
 Applicable on tube size : 48 mm Dia
 Component Weight : 440 grms
 Surface Finish: Self finished/Cold Zinc Plated
 Application: Base jack nut used to level the jack



Snap Lock
 Size : 12mm dia / 18 mm dia
 Used for Light Weight / Heavy duty frames



Malleable Cast Iron Top Cup
 Applicable on tube size: 48mm Dia
 Component Weight : 425 grams
 Surface Finish: Self Finished
 Application: Cuploc Scaffold system component used to tighten the horizontal Ledger



Drop Forged Ledger Blade End
 Applicable on tube size: 48mm Dia
 Component Weight : 210-215 grams
 Surface Finish: Self Finished
 welded at the end of horizontal (pipe) Ledger




D Pin
 Size : 12mm dia
 Used for Light Weight Heavy duty frames



Prop Nut



Drop head wedge plate




Locking Pins

14 PROPS & PUSH PULL PROPS



Adjustable Steel Props

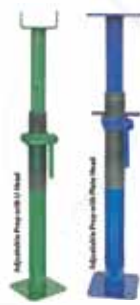

Steel scaffolding prop u head




Prop U Head



PUSH PULL PROPS

15 STAIRCASE SYSTEM



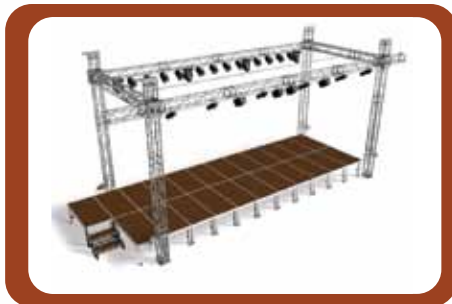

Scaffold Sales:



Building Materials Trdg. Co.L.L.C.

AL NASEEHA BLDG.MAT. TRD. CO. L.L.C.

P.B. No.: 120447, Dubai - UAE,
Tel.: +971-4-2563690, Fax: +971-4-2582865
Mob: +971 50 653 6760
E-mail : sales@alnaseeha.ae, alnaseeha@eim.ae
Web: www.alnaseeha.com

For Rental & Contract:



DECAGON SCAFFOLDING & ENGINEERING CO. L.L.C.

P.B. No.: 232583, Dubai - UAE,
Tel.: +971-4-2563690, Fax: +971-4-2582865
Mob: +971 55 494 4321
E-mail : contract@decagonscaffolding.ae
decagon.scaffolding@eim.ae
Web: www.decagonscaffolding.ae
www.decagonme.com