



Scan code consultation

Tel: 171-7035-2613

Web: www.shunchuangcheng.com

Add: 3rd Floor, Dehexin Building, Hubin North Road, Zhongshan City, Guangdong Province

PARTNER Guangdong Ideal Property Management Co., Ltd.

PARTNER Zhongshan Yuechuangcheng Culture Communication Co., Ltd.



中山市顺创成智能科技

ZhongShan ShunChuangCheng IntelligentTechnology Co., Ltd



Business Scope:

DC brushless straight pole barrier, fence barrier, advertising barrier, parking space barrier, monitoring system, License plate recognition system, pedestrian passage system, face recognition system, computer integrated wiring, New energy vehicle charging piles, etc.



SCCVip Parking Barrier

The Main Parameters:

Chassis size: 110*141*812mm

Movement: Integrated DC brushless movement

Motor power: 60w

Main board: dedicated DC brushless gate controller

External power supply: 220V 50/60Hz


Brake rod: round rod 1.5-3 meters (can be customized)

Use ambient temperature: -30-60°C

LED light with power supply: 12V/10A

Landing stick speed: 3's

Landing rod operation mode: remote control, button

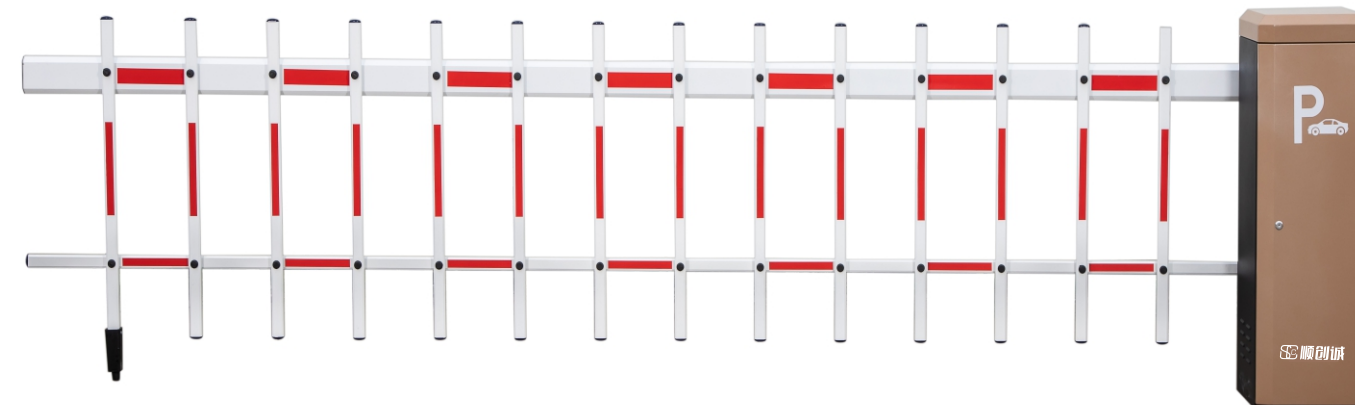

SCC Fence Gate

The Main Parameters:

Model 1: SCCHZ2 (Golden Chassis)

Chassis: 270"330*1020mm

Motor power: 100w

Main board: dedicated DC brushless gate controller

Power supply: DC power supply 24V/10A


External power supply: 220V 50/60Hz

Working temperature: -30~60°C

Remote control distance: $\geq 30M$

Landing rod operation mode: remote control, key rod length $L \leq 6$ meters

The speed of the landing rod: adjustable according to the length of the brake rod and the site conditions (2.5s-6s) Center height $H=820mm$ (the height of the center of the brake lever from the ground)

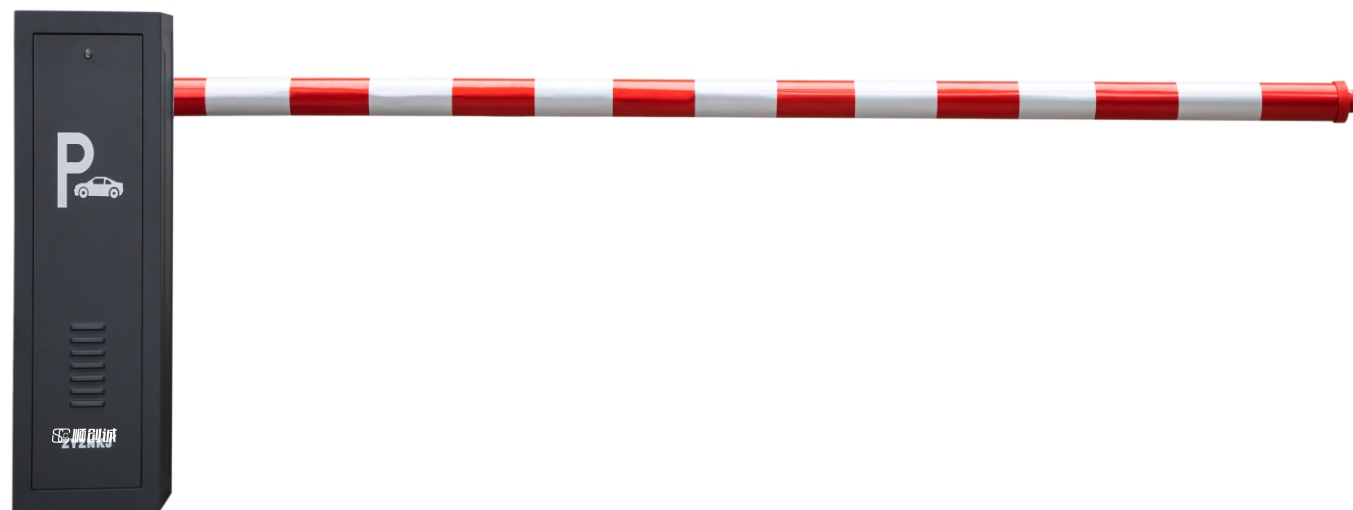

SCCVip Parking Barrier

The Main Parameters:

Model 1: B1 (gray chassis)

Chassis: 260"350*980mm

Movement: Integrated DC brushless movement

Motor power: 100w

Main board: dedicated DC brushless gate controller

Power supply: DC power supply 24V/10A

External power supply: 220V 50/60Hz

Working temperature: -30~60°C

Remote control distance: $\geq 30M$

Landing rod operation mode: remote control, button

Brake rod specification: ≤ 6 meters (optional)

1. (45*100) octagonal pole ≤ 6 meters telescopic pole

2. (38*90) elliptical rod ≤ 6 meters

3. (45*400) folding arm ≤ 6 meters

4. (38*78) foam rod ≤ 3.5 meters

5. Carbon fiber pole ≤ 3.5 meters

The speed of the landing rod: adjustable according to the length of the brake rod and the site conditions (0.8s-6s)

Center height H=820mm (the height of the center of the brake lever from the ground)



SCCVip Parking Barrier

The Main Parameters:

Model 1: B1 (gray chassis)

Chassis: 270"330*1020mm

Movement: Integrated DC brushless movement

Motor power: 100w

Main board: dedicated DC brushless gate controller

Power supply: DC power supply 24V/10A

External power supply: 220V 50/60Hz

Working temperature: -30~60°C

Remote control distance: $\geq 30M$

Landing rod operation mode: remote control, button

Brake rod specification: ≤ 6 meters (optional)

1. (45*100) octagonal pole ≤ 6 meters telescopic pole

2. (38*90) elliptical rod ≤ 6 meters

3. (45*400) folding arm ≤ 6 meters

4. (38*78) foam rod ≤ 3.5 meters

5. Carbon fiber pole ≤ 3.5 meters

The speed of the landing rod: adjustable according to the length of the brake rod and the site conditions (0.8s-6s)

Center height H=820mm (the height of the center of the brake lever from the ground)



SCC advertising gate

The Main Parameters:

Model 1: SCCG1 (special case for advertising gates)

Movement: Integrated DC brushless movement

Motor power: 150 watts (pole length 3.7m-4.3m) (long pole)

Motor power: 140 watts (below 3.7m brake lever)

Spring configuration: according to the length of the brake lever (2or3)

Relative temperature: within 90%

Leaflet size: width 93mm* height 780mm

Advertising copy size: length (93mm * number of blades) * height 780mm

Light box screen size: width 460mm height 900mm

LED strip power supply: 12V/5A

Lifting speed: 2.5 seconds (below 3.7m brake lever)

Lifting speed: 5 seconds (above 3.7 meters)

The height of the center of the upper beam: 1 meter

Remote control distance: $\geq 30\text{m}$

Rebound function in case of resistance: pressure wave control

Landing stick operation: remote control, manual, button



SCC advertising gate all-in-one machine

The Main Parameters:

- Adopt the third-generation gate movement, one-piece design, two-stage deceleration device
- Advertising blade independent motor, control system, to avoid damage to the blade
- Timing switch device, timing on/off advertising screen LED lighting
- With remote control switch, delay gate function
- In the event of a power failure or failure of the branch, the switch can be manually opened by the manual crank
- Chassis anti-aging treatment, durable



Technical Parameter

- Overall size: 386X270X1398MM
- Display size: 305X305MM
- LCD screen size: 233X413MM
- Voice output: standard voice broadcast
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz

Technical Parameter

- Overall size: 386X270X1398MM
- Display size: 305X305MM
- LCD screen size: 233X413MM
- Voice output: standard voice broadcast
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz



Product Name: License Plate Recognition Barrier All-in-One Machine (Xiaobao Jianghu)
Product model: SCC-800YZWB/SCC-800YZWY

The identification types are complete, and the license plates approved by the vehicle management can be recognized

普通蓝牌、黄牌 京A·FG 京A·F02	双层黄牌 京·A F02	普通黑牌 京A·12345	警牌 京·A0000	使馆汽车号牌 使Q145
教练汽车号牌 京A·F02	港澳入境车牌 粤Z·FG 粤Z·F02	新军牌 VA·07 53	新武警车牌 WJ京·35 350	领事馆车牌 沪A·00
挂车号牌 京·A F02	农用车牌 京 234	02式个性化号牌 京A VIP-6	民航车牌 民航-D3	新能源车牌 京A·A127



产品名称：步步高升
产品型号：SCC-800E1G
产品名称：步步高升
产品型号：SCC-800E1B
产品名称：步步高升
产品型号：SCC-800E1Y

Technical Parameter

- Overall size: 230X188X1345MM
- Display size: 152X305MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Text display: 8Hanyu, 4 lines of display
- Digital display mode: fixed display, no display
- Digital display: 4 digits
- Traffic light signal light: red and green high-brightness LED light-emitting tube
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \times \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Operating temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$

Recognition effect



Reflective license plate Backlight license plate Defiled license plate Yin Yang license plate



Mercedes Benz license plate Adhesive frame license plate low contrast license plate Tilt license plate

Technical Parameter

- Overall size: 230X188X1345MM
- Display size: 152X305MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Text display: 8Hanyu, 4 lines of display
- Digital display mode: fixed display, no display
- Digital display: 4 digits
- Traffic light signal light: red and green high-brightness LED light-emitting tube
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \times \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Operating temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$



Camera pixels (200-400w) customized according to customer needs



Product name: Step by step PLUS
Product model: SCC-800E6G/SCC-800E6B/SCC-800E6Y

Technical Parameter

- Overall size: 298X188X1400MM
- Display size: 255X255MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Text display: 16 Hanyu, 4 lines of display
- Digital display mode: fixed display, no display
- Digital display: 4 digits
- Traffic light signal light: red and green high-brightness LED light-emitting tube
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \times \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Operating temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$



Product name: step by step
Product model: SCC-800E2G/SCC-800E2B/SCC-800E2Y

Technical Parameter

- Overall size: 298X188X1600MM
- Display size: 255X255MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Text display: 16 Hanyu, 4 lines of display
- Digital display mode: fixed display, no display
- Digital display: 4 digits
- Traffic light signal light: red and green high-brightness LED light-emitting tube
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \times \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Operating temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$



Product name: 18.5" LCD screen (T18)
Product model: SCC-800T18B/SCC-800T18G



Product name: 21.5" LCD screen (T21)
Product model: SCC-800T21B/SCC-800T21G

Technical Parameter

- Overall size: 298X150X1398MM
- Display size: 234X412MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \times \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Working temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$

Technical Parameter

- Overall size: 355X150X1398MM
- Display size: 272X479MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \times \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Working temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$



Product Name: Advertising Robot
Product model: SCC-JOR03B

Product Name: Advertising Robot
Product model: SCC-JOR03G

Product Name: Smart Parking Robot
Product model: SCC-JOR01B/SCC-JOR05B

Product name: Robot video intercom system
Product model: SCC-DJ02

Product name: Robot sweeping boxes
Product Model: SCC-SMH01



Product name: Dalingtong T8
Product model: SCC-800T8B/SCC-800T8G



Product name: Dalingtong T9
Product model: SCC-800T9B/SCC-800T9G



Product name: T20
Product Model: SCC-800T20B/SCC-800T20G

Technical Parameter

- Overall size: 355X150X1398MM
- Display size: 305X305MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Working temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$

Technical Parameter

- Overall size: 355X150X1398MM
- Display size: 305X305MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Working temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$

Technical Parameter

- Overall size: 220X140X1398MM
- Display size: 152X305MM
- Voice output: standard voice broadcast
- Data communication: Ethernet communication interface, lightning protection design
- Installation adjustment angle: multi-angle adjustable
- LED viewing angle: $\pm 35^{\circ} \pm 20^{\circ}$
- Average LED life: ≥ 50000 hours
- Input voltage: AC220V/50Hz
- Working temperature: $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$



Product Name: Smart Eye/Four-Line Screen (T1)
Product model: SCC-800CB/CY



Product name: Step by step PLUS (E9)
Product model: SCC-800E9B/G



Product Name: New Big Apple
Product model: SCC-800D1B/Y



Product Name: Smooth sailing (PHS)
Product model: SCC-800T6B/G



Product name: two-line screen/simple pass
Product Model: SCC-800A6/A8



Product name: T20
Product model: SCC-800T20B/G

• System topology



Intelligent Recognition License Plate Recognition smart gate

• Six advantages of wireless cloud platform



Smart Community Face Recognition System



- Dynamic face recognition, live detection, photo anti-counterfeiting, 2 million cameras
- Offline whitelist number 10,000-50,000, universal voice, stranger warning
- Support the integration of personal and ID cards, ID cards, IC cards, ID cards, Bluetooth cards, RFID cards
- Waterproof, dustproof, anti-backlight, with WG26 signal output



Smart Campus Face Recognition System




- Dynamic face recognition, live detection, photo anti-counterfeiting, 2 million cameras
- Offline whitelist number 10,000-50,000, universal voice, stranger warning
- Support the integration of personal and ID cards, ID cards, IC cards, ID cards, Bluetooth cards, RFID cards
- Waterproof, dustproof, anti-backlight, with WG26 signal output



Smart Park Face Recognition System



- Dynamic face recognition, live detection, photo anti-counterfeiting, 2 million cameras
- Offline whitelist number 10,000-50,000, universal voice, stranger warning
- Support the integration of personal and ID cards, ID cards, IC cards, ID cards, Bluetooth cards, RFID cards
- Waterproof, dustproof, anti-backlight, with WG26 signal output

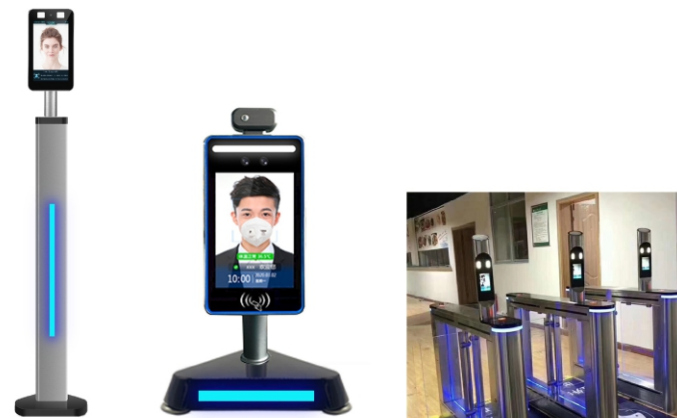

Face recognition machine



Product Name: Small Steel Cannon (Column Type)
Product Model: SCC-818C



Product Name: Monocular Flat Panel (Column Type)
Product model: SCC-818B01L



Product name: Monocular flat panel (wall-mounted)
Product model: SCC-818B01B



Product name: Access control and attendance machine
Product Model: SCC-818D5




Product Name: Binocular Flat Panel (Column Type)
Product model: SCC-818B02L



Product name: binocular tablet (wall-mounted)
Product model: SCC-818B02B



Product name: 5G face recognition all-in-one machine
Product model: SCC-818Q5G

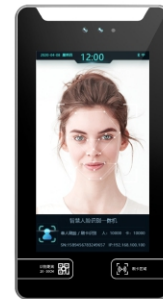

Product Name: Face Scanning, Code Scanning and Card-swiping All-in-One Machine
Product model: SCC-818QYT



Product name: face recognition for temperature measurement
Product model: SCC-818W




Product Name: Monocular Flat Panel (Column Type)
Product Model: SCC-818Z1L



Product name: Monocular flat panel (wall-mounted)
Product model: SCC-818Z1B



Product name: door guard machine
Product Model: SCC-818MGJ

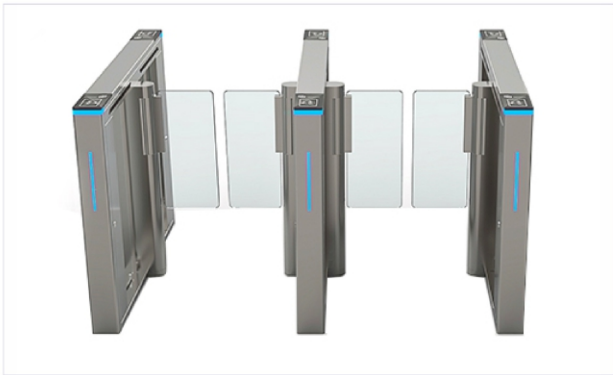

Product name: luxury speed gate
Product model: SCC-STM01D/S




Product name: luxury speed gate
Product model: SCC-STM02D/S




Product name: luxury swing gate
Product model: SCC-BZ01D/S




Product name: luxury swing gate
Product model: SCC-BZ02D/S

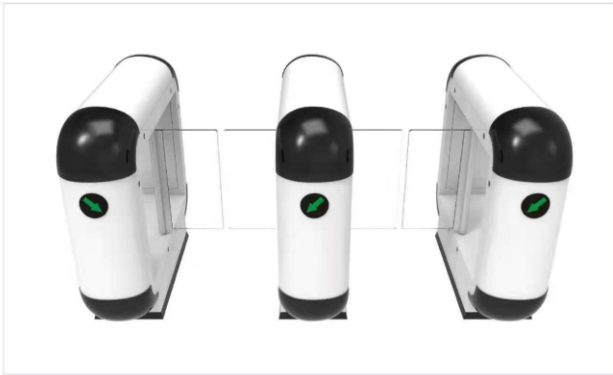


Product name: Panda swing gate
Product model: SCC-XMBZ01D/S

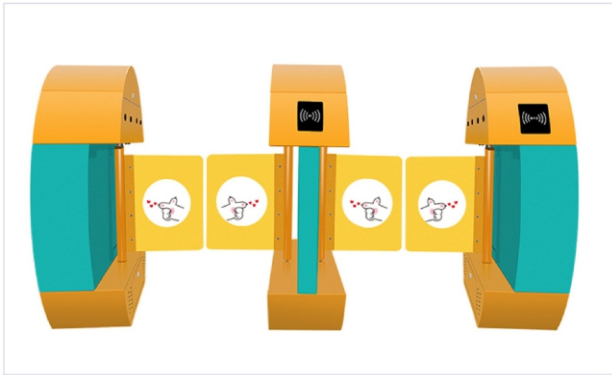

Product name: Kindergarten swing gate
Product model: SCC-XBZ01D/S

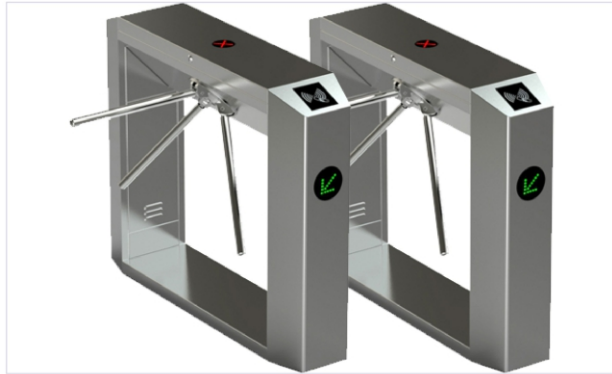

Product name: Bridge type three roller gate
Product model: SCC-800

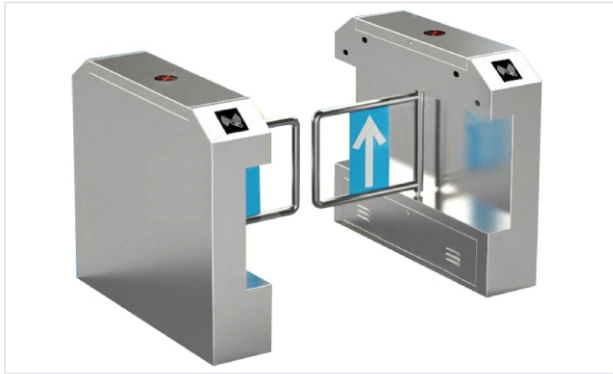

Product name: inclined plane swing gate
Product model: SCC-810D/S




Product Name: Inclined Wing Gate
Product model: SCC-820D/S



Product name: translation brake
Product model: SCC-830D/S

智慧工地

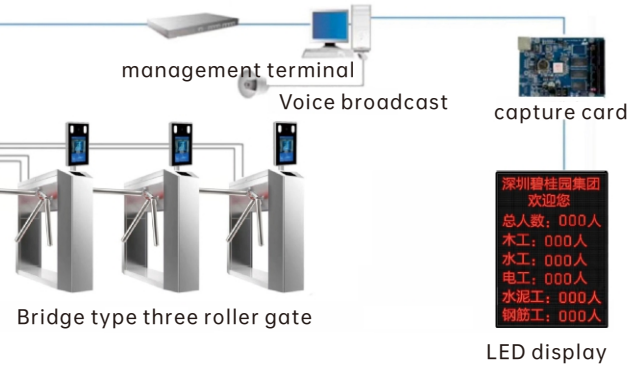

Product name: single channel full height turnstile
Product model: SCC-ZD01



Product name: Double-channel gate full-height turnstile
Product model: SCC-ZD02


▶ One mobile phone to manage access control

The Internet of Things access control system, relying on mobile Internet technology, realizes a refined, real-time and traceable management of the flow and movement trajectory of people in the system by using new technologies such as the Internet of Things, cloud computing and virtualization. Internet access control uses two-dimensional code as the medium and carrier of personnel identification. The system configures permissions for each user's WeChat account, and the user can open the corresponding door lock by scanning the two-dimensional code on the access control device. The technology realizes opening the door by dialing a mobile phone number, using Bluetooth technology to realize a shake to open the door, a variety of interactive access control methods, which are safe and environmentally friendly, and are more convenient to use.



Scan the code to open the door

Swipe to open the door

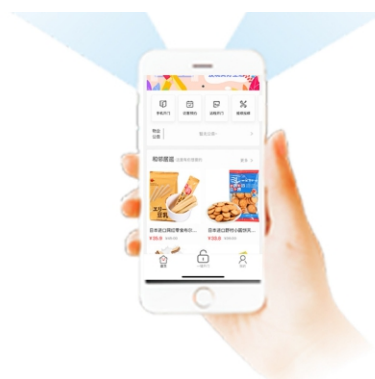

remote door

Visitors open the door

▶ IoT Operation Service Leader


Product Features:

1. Support WeChat sweep to open the door
2. Support IC card swiping to open the door
3. Support remote one-button door opening
4. Visitors make an appointment to open the door for remote debugging
5. Internet of Things access control that will make money
6. Powerful background control authority
7. Tencent Haina community applications are seamlessly connected, safe and reliable

Access control machine



Product name: IC access control all-in-one machine
Product Model: SCC-1002M



Product name: IC access control all-in-one machine
Product Model: SCC-1002M1



Product name: Fingerprint access control machine
Product Model: SCC-F2

Access Control Accessories



Product Name: Product Name Silent Lock



Product name: door closer



Product name: Electric lock special power supply



Product name: IC/ID card

Consumer machine



Product Name: Desktop Consumer Computer
Product model: SCC-XFJ01



Product name: hanging consumer machine
Product model: SCC-XFJ02



Product name: QR code consumer machine
Product model: SCC-XFJ03



Product name: face recognition consumer machine
Product model: SCC-XFJ05


Electronic patrol



Product Name: Flashlight Patrol Stick
Product model: SCC-XG011



Product Name: Fingerprint Patrol Machine
Product model: SCC-XG03



Product Name: Patrol Card
Product model: SCC-XGY01



Product Name: Patrol Point Card
Product model: SCC-XGD01

▶ Classic card swipe box



Product name: classic ballot box
Product model: SCC-PX001

Technical parameter

- Box material: cold rolled steel plate 1.5mm~2mm
- Surface treatment: degreasing rust 7-pickling-phosphating-painting-high temperature paint
- Display specifications: 4 half-character screens 345mm*75mm
- Applicable temperature: -40℃~+80℃
- Applicable temperature: 10%~+95%
- Cards supported: IC card, ID card, Bluetooth card, RFID card

▶ Autonomous parking channel machine



Product Name: EPT Embedded Host
Product model: SCC-Q02

▶ Handheld



Product name: Handheld
Product model: SCC-SCJ01



Product Name: Square Post Box
Product model: SCC-GT01
Production material: stainless steel
1.2X1.5X2.4m/1.5X1.5X2.4m
1.5X1.7X2.4m/1.7X2.0X2.4m
1.8X1.8X2.4m



Product Name: Double Oval Post Box
Product model: SCC-GT02
Production material: stainless steel
1.0X2.3X2.4m/1.2X2.5X2.4m
1.5X1.7X2.4m/1.7X2.0X2.4m
1.8X1.8X2.4m



Product Name: Art Post Box
Product model: SCC-GT16
Production material: stainless steel
1.2X1.5X2.6m/1.5X1.5X2.6m
1.5X1.7X2.6m/1.7X2.0X2.6m
1.8X1.8X2.6m



Product Name: Square Post Box
Product model: SCC-GT05
Production material: steel paint
1.2X1.5X2.6m/1.5X1.5X2.8m
1.5X1.7X2.8m/1.7X2.0X2.8m
1.8X1.8X2.8m



Product Name: Art Post Box
Product model: SCC-GT10
Production material: steel paint
1.2X1.5X2.6m/1.5X1.5X2.8m
1.5X1.7X2.8m/1.7X2.0X2.8m
1.8X1.8X2.8m



Product name: recitation booth
Product model: SCC-GT11
Production material: steel paint
1.2X1.5X2.6m/1.5X1.5X2.8m
1.5X1.7X2.8m/1.7X2.0X2.8m
1.8X1.8X2.8m



Product name: Trapezoidal speed bump
Product Model: SCC-JSD01



Product Name: Locator
Product Model: SCC-JSD01



Product Name: Fixed Reflective Column/Cone/Square Cone
Product Model: SCC-FGZ01/YZ01/FZ01



Product name: signage sign
Product model: SCC-BP01



Product name: water horse
Product Model: SCC-SM01



Product Name: Outdoor Reflector/Traffic Fence
Product Model: SCC-FGJ01/HL01

▶ Classic success stories

Poly Yuzun Garden, Pudong New Area, Shanghai



Dongguan Leon Smart Furniture Co., Ltd.



Dongguan Qibao Yiding Industrial Park



Trading Technology Six Laws Base



Wuzhou Department of Agriculture and Rural Affairs




Guangxi Pingnan High-speed Railway Station




Fengshan Sanmen Sea Scenic Spot



Guangxi Nanning Wuxu Airport

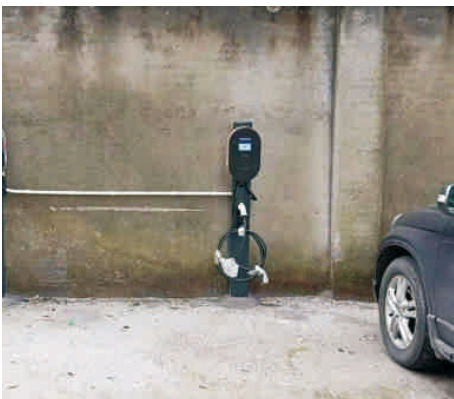

Jiangxi Shanggao Garden

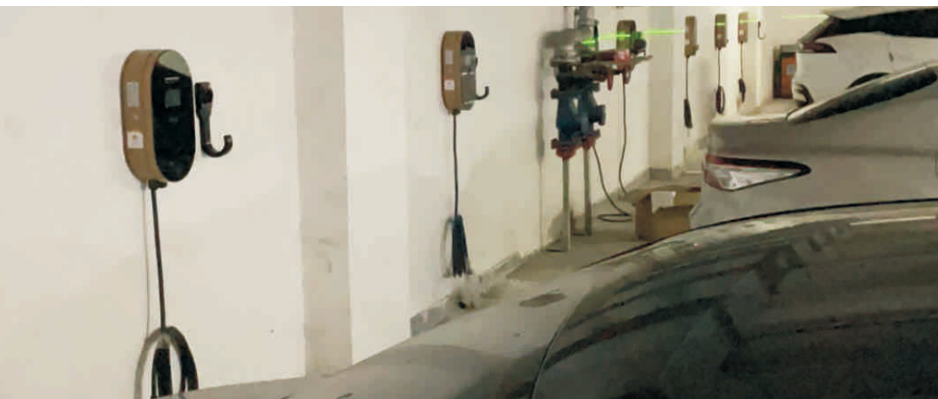

Shenzhen Pingshan Senior High School